

Speed Control of Separately Excited DC Motor Using Chopper

Kaustubh S. Deshmukh, Master in Technology, Electrical Engineering, G H Raison College of Engineering and Technology, Nagpur, Maharashtra, India

Prof. Rutuja S Hiware, Electrical Engineering, G H Raison College of Engineering and Technology, Nagpur, Maharashtra, India

Abstract - The Aim of the paper is to control the separately excited dc motor by using the IGBT based chopper. The speed of separately excited dc motor can be control by changing the armature voltage and changing field flux. Due to this the speed can be controlled for below rated speed and speed above the rated speed, respectively. In this paper, the motor speed below and upto the rated speed can be achieved by Changing the Armature voltage. The Armature voltage can be controlled by Using IGBT based chopper. The IGBT chopper receives signal from controller and Adjustable voltage is given to the armature of dc motor according to the wanted speed. The advantages to employed this technique is that the Speed varies proportionally with armature voltage and varies inversely with field voltage by keeping field and armature voltage constant respectively. The IGBT employed chopper i.e. power module gives smoother control as compared with the SCR based circuit. By employing this system, we can chop the frequency and speed of DC motor can be control. The two controllers are employed here, speed controller and current controller. Here, we are employing the PI type controller i.e. proportional-integral type. The aim of using PI type controller is it eliminates the delay and provide fast control. It give a very fast response to sudden changes in motor speed. The simulation of model is done and analyzed in MATLAB (Simulink) under Different range speed and torque condition.


1. Introduction

Demanding of Industrial Sector for high performance electrical drives is increases nowadays. Variable speed applications are gradually increases in industrial sector. Therefore it is needed to create high performance, high flexible electrical drives. Electrical motor, Power controller and energy transmitting medium are the main Constituents of Electrical drives. Nowadays, power electronics converter are cast instates of power controller. High performance motor drive system has special features such as good dynamic speed command and load regulating reaction Electric drives are categories as: DC drives system and AC drives system. DC drives are widely used than AC drives, in applications such as, good speed regulation adjustable speed control, braking and reversing frequent starting. Some important applications are mine winders, paper mills, hoists, rolling mills, printing presses, traction, machine tools, textile mills, cranes, excavators. DC motors are used

widely in position control system and variable speed drives. DC motors has excellent control of speed for speeding up and slowing down. In a DC motor the supply is directly connects to the field of the motor and as results a specific voltage control is obtained, which is necessary for control of speed and torque. DC drives are backbone of industrial applications due its advantages like simplicity Reliable, low cost, flexible etc. DC drives are cheaper for low horsepower ratings. DC motors are generally consider as flexible speed machines and a wide range of options have developed for this purpose.

There are several techniques of speed control of DC drives – armature voltage control, armature resistance control and field flux control. In this paper, the motor speed under and upto the rated speed can be achieved by Changing the Armature voltage. The Armature voltage can be controlled by Using IGBT based chopper. Using Chopper as power converter and PI as speed and current controller,

controlling of DC motor speed is examined. The purpose of controller is to reduce the error and the error is calculated by Equaling output value with the set point. A chopper is a static power electronic device used to convert stable dc input voltage to an adjustable dc voltage as output. Here we use IGBT Chopper systems which have fast response, smooth control capability and are very efficient. An IGBT chopper is used to step down or step up the stable dc input voltage.

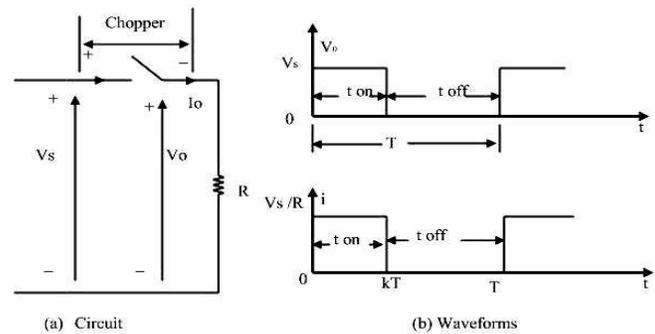

2. Chopper

A chopper is a static power electronic device which changes stable dc input voltage to an adjustable dc voltage. Chopper is used to step down or step up the stable dc input voltage. Chopper systems offer high efficiency, regeneration facility, smooth control, and faster response. There are some power semiconductor devices used in a chopper circuit. They are force commutated thyristor, MOSFET, BJT, GTO and IGBT. But from the above switching devices, GTO and IGBT are broadly used. These semiconductor devices are generally denoted by a switch. No current will flow, when the switch is OFF, and when switch is ON, the current will flow through the load. In this paper, we use the IGBT as a switch in a chopper circuit. IGBT employed chopper gives fast switching, more efficiency, less switching losses. The ON and OFF state of semiconductor switch i.e. IGBT switch which is high in speed. It connects and disconnects the source to load and the load from source respectively, at a fast speed. As shown in Fig.1. When the switch is in the ON state i.e. Ton, the chopper is turned ON and output voltage and source voltage are equal. When the switch is turned OFF i.e. Toff, the chopper is off and load voltage is zero. In this way, we obtain the chopped dc voltage at the load terminals.

2.1 Chopper circuit diagram and its voltage and current waveform

$$\text{Also, } V_0 = f * T_{on} * V_s$$

$$T_{on} = \text{on time} \quad T_{off} = \text{off-time.}$$

$$T = T_{on} + T_{off} = \text{Chopping period.}$$

$$\alpha = T_{on}/T_{off} \quad , \quad f = 1/T = \text{chopping frequency.}$$

Thus the voltage can be controlled by varying duty cycle α

$$V_0 = \alpha * T_{on} * V_s$$

3. Separately Excited DC Motor

The major use of DC motors are in position control and changeable-speed applications. The techniques of speed control for DC motors are less expensive and simpler than the AC motors. When a wide speed range of control is needed, the DC motors are employed. Separately excited DC motor has armature and field winding. It requires a separate supply voltage. Field flux is supplied by field winding to armature. The current immediately flows to the armature winding, when the DC voltage is applied to the motor, through the brushes and commutator. The rotor is positioned in a magnetic field and it is also carrying current. The back EMF and a torque are produced by the motor, a torque stabilizes the load torque at a specific speed. When the field current and armature current flow in the circuit, it excites the DC

motor, thus develops the back EMF and torque. The armature current is independent of The field current. The field and armature winding are supplied separately. Any variation in the armature current has no influence on the field current. The field current are generally minimum than armature current. Suppose, I_a is the armature current in ampere, V_a is the armature voltage in volt, E_g is the motor back emf in volt, R_a is the armature resistance in ohm, L_a is the armature inductance in Henry.

The armature voltage equation is shown below:

$$V_a = E_g + I_a R_a + L_a \frac{dI_a}{dt}$$

The Torque equation is given as,

$$T_d = J \frac{dw}{dt} + B_w + T_l.$$

Equation for back EMF of motor is given as,

$$E_g = K \phi W$$

Also, $T_d = K \phi I_a$


$$w = (V_a - I_a R_a) / K \phi$$

Thus from the above equations, we observe that the speed of DC motor be influenced by armature current, applied voltage, field flux, and armature resistance. So we can control the speed of motor by armature resistance control, armature voltage control, and field flux control.

4. Modeling Of DC Motor

The basic principle of speed control of DC motor is that the output speed of DC motor can be change by changing the armature voltage for speed under and upto the rated speed. The field voltage is kept stable. The output speed is matched with the reference speed and if error is occurred than error signal is fed to speed controller. Controller will compare the result, and thus output will Vary whenever there is a change in the base speed and the speed feedback. The control voltage that controls the


operation duty cycle of converter, which is control by speed controller. The converter output provides the variable voltage essential to bring motor back to the desired speed. The Reference speed is delivered through a potential divider. The voltage from potential divider is linearly linked to the speed of the DC motor. The output speed of motor is shown by Tachogenerator. Result of Tacho will not be perfectly dc and contains some ripple. So, we employed a filter to bring Tacho output controller level. The block diagram for DC motor speed control is show below:

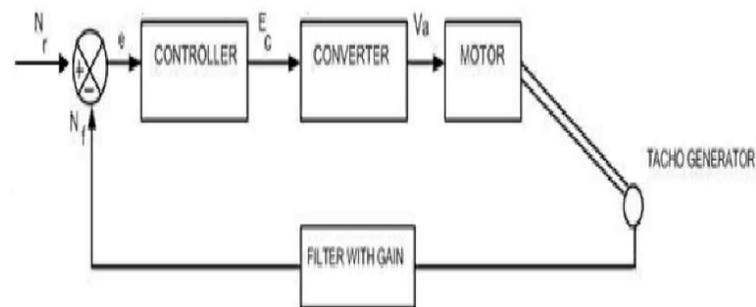


5. MATLAB Simulation And Results

In this paper, we analyzed the speed control of D.C.MOTOR by using current and speed controller. In the open loop model the output speed is uncontrolled as shown in below fig.


5.1 Simulink model of open loop model of chopper with dc machine

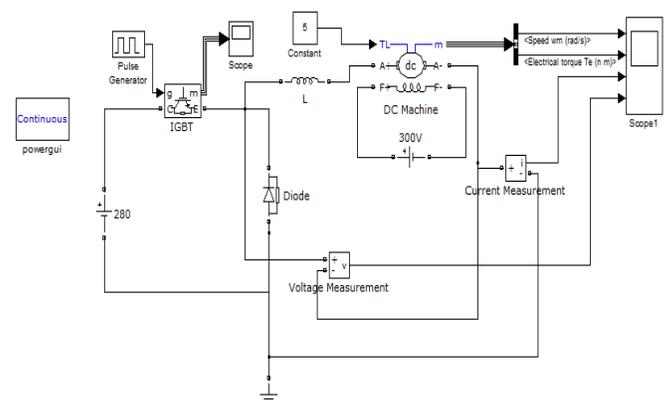


5.2 Simulation of closed loop model of chopper with dc machine

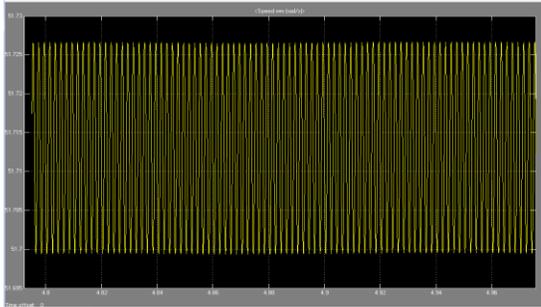



5.1.1 Simulation result for Speed

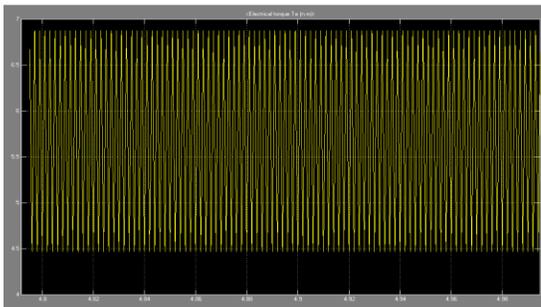


5.1.2 Simulation result for Torque

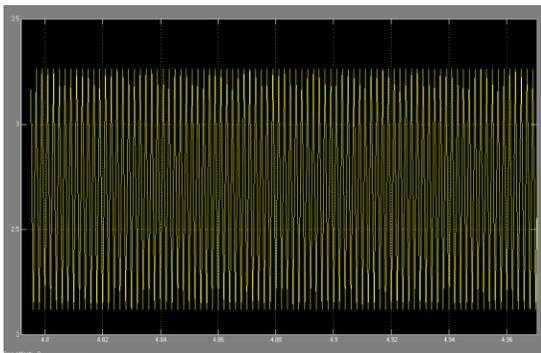

5.1.3 Simulation result for Current.

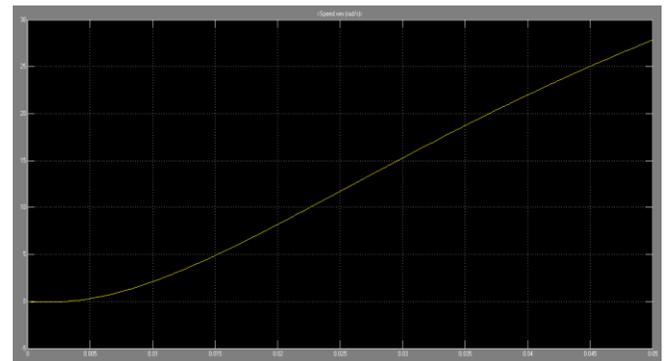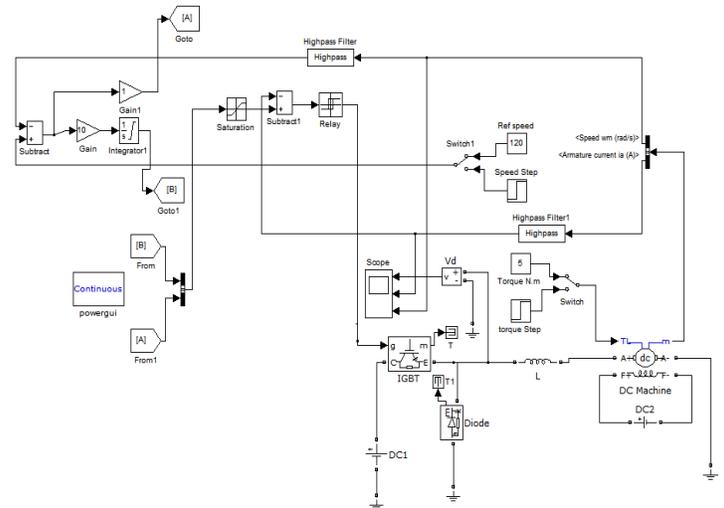

5.2.1 Result for Speed

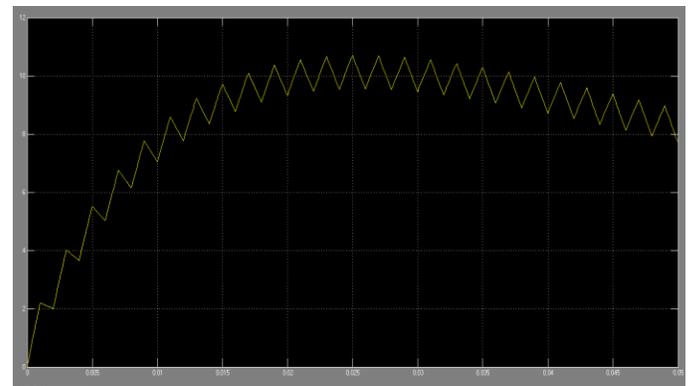

5.2.2 Result for Current

5. Conclusion

The DC motor speed control has been successfully analyzed using chopper as a power controller and Speed and Current controller (Proportional-Integral type) based on the closed loop model of DC motor. Initially a simplified open loop model for DC motor is studied and then closed loop model is considered and required of current controller is studied. Then a generalized modelling for speed control of dc motor is done and analyzed. The simulation is done in MATLAB under changing load condition, changing reference speed condition and changing input voltage. The results obtained are analyzed. The DC motor speed control is completed, for rated and under rated speed by changing the armature voltage.

6. References

- [1] Amir Faizy, Shailendra Kumar, DC motor control using chopper, NIT Rourkela 2011.
- [2] Saffet Ayasun, Gultekin Karbeyaz, DC motor speed control methods using MATLAB/ SIMULINK and their integration into undergraduate courses, 2008.
- [3] Bose B.K., Power electronics and motor drives recent technology advances," *Proceedings of the IEEE International Symposium on Industrial Electronics*," IEEE, 2002, p 22-25.
- [4] SIMULINK, Model-based and system-based design using Simulink, Maths works, Inc, Natick, MA, 2000.
- [5] MATLAB SIMULINK, version 2009, SimPowerSystem, One quadrant chopper DC drive.
- [6] Chinnaiyan V. Kumar, Jerome Joritha, Karpagam, J. S.Sheikh Mohammed, Design and Implementation of High Power DC-DC converter and speed control of dc motor using TMS 320F240DSP, Proceedings of India International Conference on Power Electronics, 2006.
- [7] Rashid, M.H., Power Electronics, Prentice Hall of India, New Delhi, 1993.

[8] Ogata, K., Modern Control Engineering. Englewood Cliffs, NJ: Prentice Hall, 2001.

[9] Dubey, G.K., Fundamentals of Electrical Drives. New Delhi, Narosa Publishing House, 2009