

A STUDY ON PROBABILITY FAILURE OF A COLUMN IN RC FRAME

Manjunath J¹, Dr.K Manjunath², Naveen Kumar S³

¹ Student, Civil Engineering, PESCE Mandya, Karnataka, India

² Professor & HOD, Civil Engineering, MCE Hassan, Karnataka, India

³Assistant Professor, Civil Engineering, PESCE Mandya, Karnataka, India

Abstract -The present method of designing Reinforced Concrete Columns is based on limit state philosophy which makes use of partial safety factors for material strengths and loads. However, the overall safety of column as a member and the probability of failure of a column against a given load is not explicitly obtained. The design variables being random, it becomes much more important to assess the level of safety in the probabilistic design situation. Column being the vital most structural element, probability of failure of a column is linked to the overall safety of a structural system. With this in view, an attempt is made to assess the safety levels ensured by the design methodology of the present code of practice IS 456-2000. This requires the information on the probability distributions of the resistance part and action part in each limit state.

For a particular column statistics and probability distribution of axial load with uniaxial moments are generated by digital simulation on a R.C. frame using ETABS 2013. The generated data on axial load with uniaxial moment is subjected to statistical analysis, probability modeling using program supported on MATLAB. Resistance statistics are generated using the relevant equations from IS 456-2000. Several design situations corresponding to different material grades and dimensions are considered. Probability of failure is obtained by Monte Carlo Simulation which establishes the statistics of safety margin $M = R - S$.

It is attempted to see if the safety level is uniform over a range of design situation.

Key Words: Reliability Analysis, Probability of Failure, RC Frame, Monte-Carlo Simulation

1. INTRODUCTION

Reliability analysis is defined as the consistent evaluation of design risk using probability theory.

The reliability is the probability of an item performing its intended function over a given period of time under the operating conditions encountered. The four significant elements are.

- a) Probability
- b) Intended function
- c) Time
- d) Operating conditions

1.1 Uncertainties

The reliability is a probability, which is the first element in the definition. The second point, intended function, signifies that the reliability is a performance characteristic. For a structure to be reliable, it must perform certain function or functions satisfactorily for which it has been designed. Reliability is always related to time. In case of structure, it must perform the assigned function satisfactorily. The last point is operating conditions, this establishes the actions, stresses that will be imposed on the structure. These may be loads, temperature, corrosive atmosphere, shock, etc.

1.2 Probability of failure

The achievement of absolute safety or reliability is impossible, a probabilistic approach to a evaluation of safety becomes a sensible solution which are subjected to random variables. There is a need for a rational approach to the evaluation of the structural safety, taking into account these random variations. The study of variability comes under the domain of statistics and probability. Using the probabilistic approach, there is a possibility of obtaining uniform reliability (uniform performance in structure under different design situation). Hence probabilistic approach must be used. For convenience, the reliability, R , is defined in terms of the probability of failure, P_f , which is taken as $R=1-P_f$. When probability theory is used in the limit state design, the method is called probability-based limit state design.

2. DETERMINISTIC DESIGN DETAILS

For deterministic design single bay RC Portal frame fixed at the base is considered with a following data.

2.1 Symmetrical Loading on RC frame

- Height of column=4m
- Length of the beam=8m
- Column dimension 400*600mm
- Beam dimension 400*700mm
- Characteristic strength $f_{ck} = 20\text{N/mm}^2$, $f_y = 415\text{N/mm}^2$
- Live Load on the beam=20kN/m.

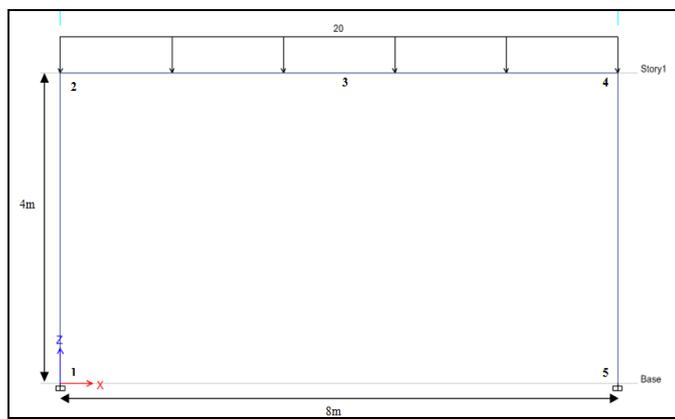


Fig -1: RC frame due to symmetrical loading

The moment and axial load is obtained at the different location by using ETABS 2013.

Table -1: Moment and Axial load of the column

Moment at different location (kN-m)		Axial Load at different location (kN)	
M1/M5	M2/M4	P1/P5	P2/P4
47.52	101.29	131.98	107.99

In the deterministic design of RC frame due to symmetrical loading, the column is designed by taking $M_2=101.29$ kN-m, $P_2=107.99$ kN and by using interaction curves of SP-16 the percentage of the steel in the column was found to be 0.8 ($p_t=0.8\%$) and the area of the steel=1920mm².

2.2 Unsymmetrical Loading on RC frame

- Height of column=4m
- Length of the beam=8m
- Column dimension 400*600mm
- Beam dimension 400*700mm
- Characteristic strength $f_{ck} = 20\text{N/mm}^2$, $f_y = 415\text{N/mm}^2$
- Lateral Load at 2/3rd from the base=15kN
- Point Load at 3/4th of length=25kN.

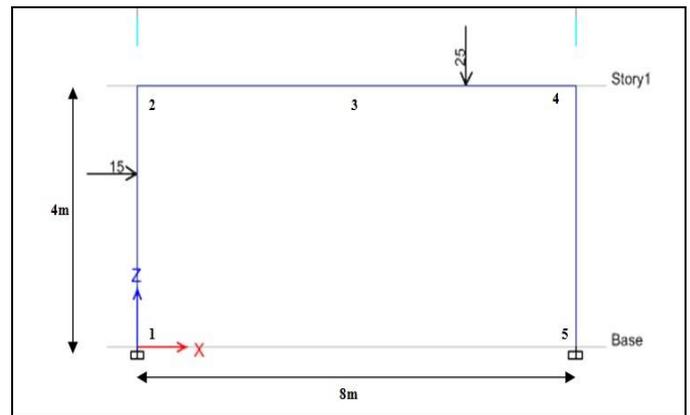


Fig-2: RC frame due to unsymmetrical loading

Table -2: Moment and Axial load of the column

Moment at different location (kN-m)		Axial Load at different location (kN)	
M2	M4	P2	P4
33.62	47.74	32.47	48.50

In the deterministic design of RC frame due to unsymmetrical loading, the column is designed by taking $M_2=33.62$ and $P_2=32.47$, $M_4=47.74$ kN-m and $P_4=48.50$ kN and by using interaction curves of SP-16 the percentage of the steel in the column was found to be 0.8 ($p_t=0.8\%$) and the area of the steel=1920mm².

3. GENERATION OF LOAD STATISTICS AND RESISTANCE STATISTICS

In the process of codal assessment, reliability analysis of existing design of column as per the current codal provisions are carried out for limit state of collapse in compression and then the reliability levels of the present designs under different design situations are established. Columns subjected to axial load with uniaxial bending are considered.

3.1 Distribution of parameters

The basic design variables are identified as,

- a) Geometrical dimensions
- b) Material properties
- c) Load

Table -3: Parameters variation

Geometrical Properties		Material properties		Load
Breadth	3%	f_{ck}	20%	Live Load 40%
Depth	5%		f_y	
Length	3%			

3.2 Monte Carlo simulation

The Monte Carlo simulation is a technique used to generate the random variables whose probability distribution is known.

- a) Generate random numbers between 0 to 1. (v_1 & v_2)
- b) The normal deviates is given by
 $u_1 = [2\ln(1/v_1)]^{0.5} \cos(2\pi v_2)$
 $u_2 = [2\ln(1/v_1)]^{0.5} \sin(2\pi v_2)$
- c) Normal variates
 $y_1 = \mu + \sigma * u_1$
 $y_2 = \mu + \sigma * u_2$

100 data sets were randomly generated for each cross section of beam and column, height of the column, length of the beam, characteristic strength of concrete and steel, live loads and each data set varied randomly as a function of statistical models for the variables involved by using Monte-Carlo simulation in EXCEL.

3.3 Probability Modeling of Action

100 data sets of values were obtained by Monte-Carlo simulation in EXCEL. The model has been made to run for 100 times in ETABS 2013 and analyzed. Moment and axial load is obtained in different position for 100 times in symmetrical and unsymmetrical loading of RC frame.

The variables included in the study are dimensions, material properties, loads. The current study fits a normal distribution for all variables by using Chi-square Test for goodness-of-test in MATLAB. Data is grouped for frequency analysis, statistical parameters like mean, standard deviation, coefficient of variation are worked out. The randomness is modeled with probability distributions. The results are presented in the form of graph by using MATLAB.

- a) Symmetrical loading

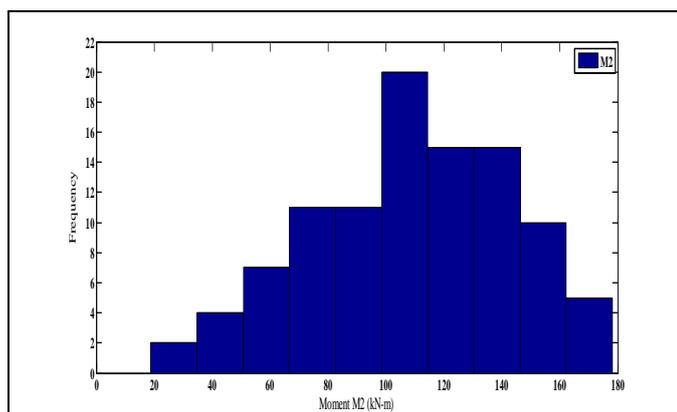


Fig-3: Histogram for moment M2

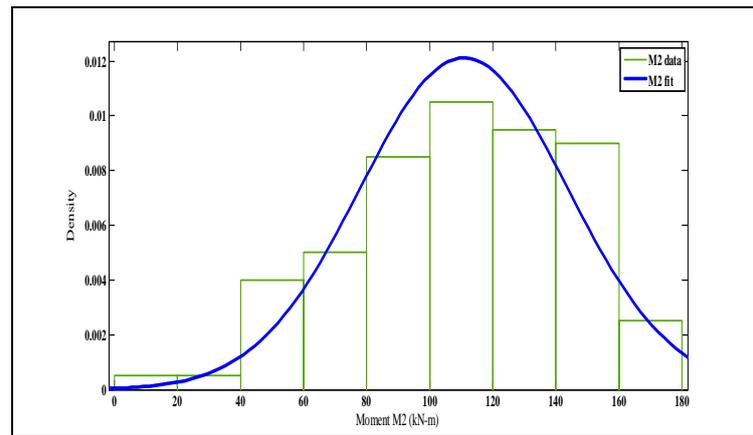


Fig-4: Probability distribution curve for Moment M2

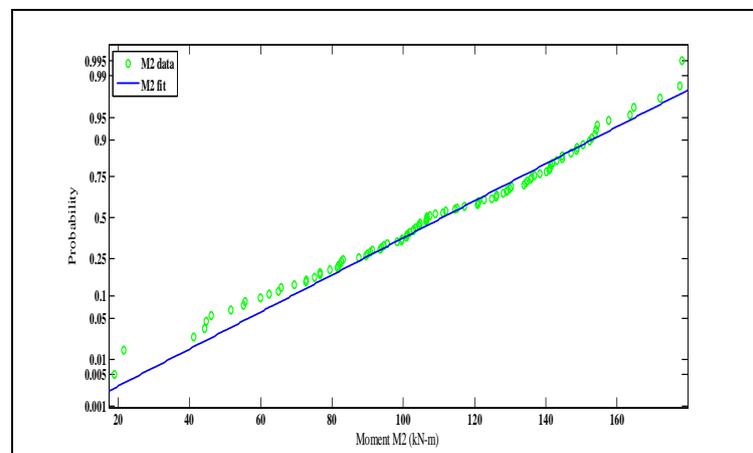


Fig-5: Probability Plot for Moment M2

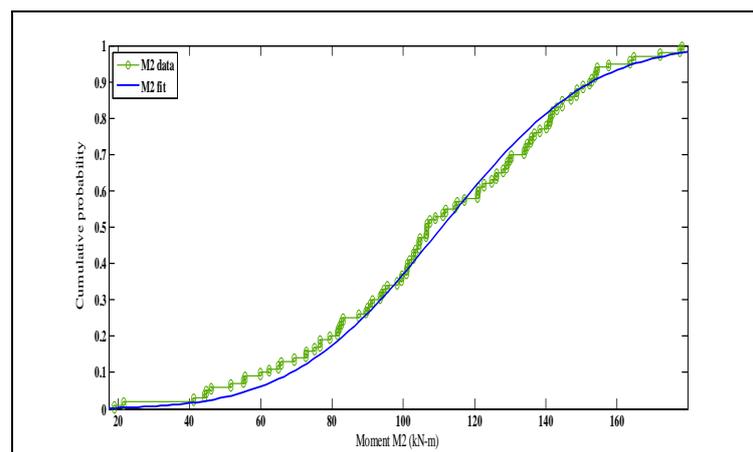


Fig-6: Cumulative density function for Moment M2

b) Unsymmetrical loading

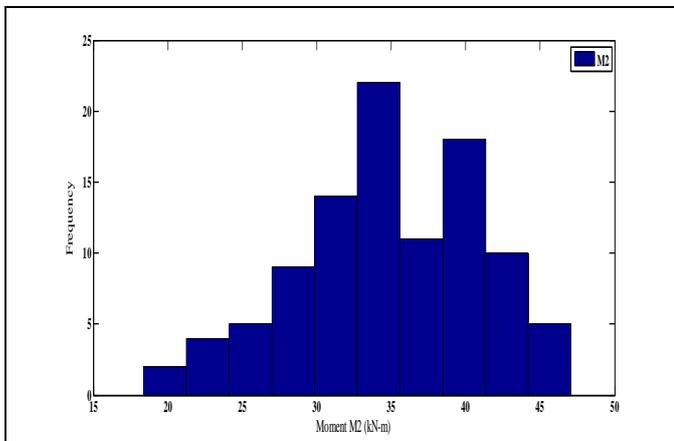


Fig-7: Histogram for moment M2

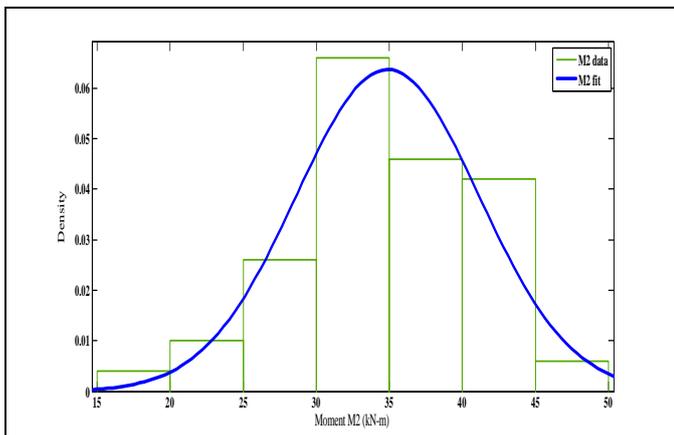


Fig-8: Probability distribution curve for Moment M2

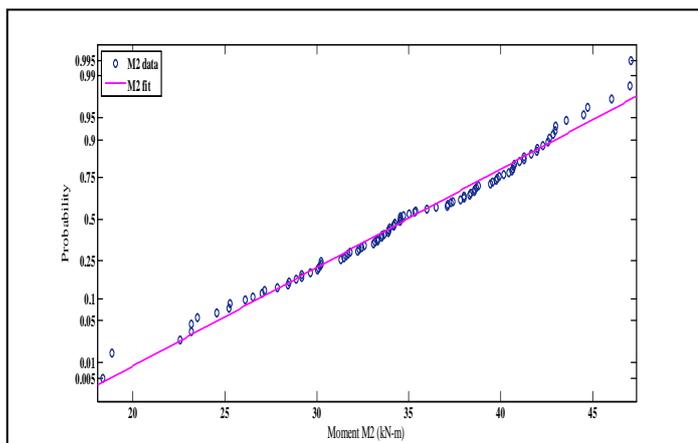


Fig-9: Probability Plot for Moment M2

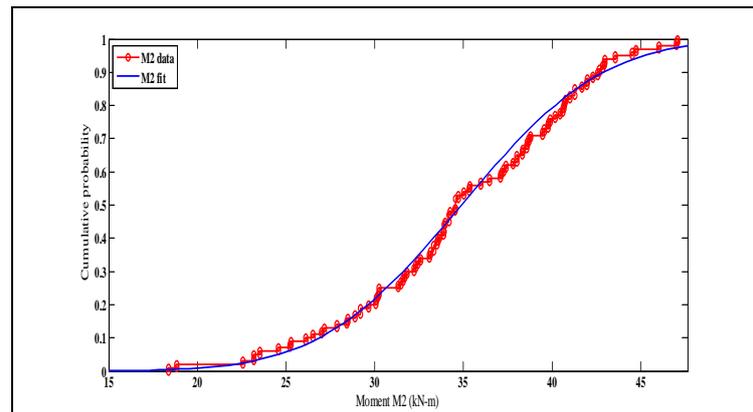


Fig-10: Cumulative density function for Moment M2

Similarly, The histogram, probability distribution curve, cumulative density function and probability plot of the generated sample are obtained for all the moment and axial load for different location.

4.COMPUTATION OF PROBABILITY OF FAILURE

- For random variations in different grades of concrete, characteristic strength, dimensions and live load, corresponding moment and axial values are obtained from ETABS.
- Compute deterministic value of P_t .
- Find P_{t_i} where $i= 1, 2, 3, \dots, 100$. (ETABS values)
- If $P_t < P_{t_i}$ then it is failure.
- Compute probability of failure, $P_f = (\text{Number of failure} / \text{Total number of observation})$

4.1 Symmetrical Loading on RC frame

Table -4: Mean, SD and COV of moment and axial load

Location	M2	P2
$f_{ck}(N/mm^2)$	20	20
$f_y(N/mm^2)$	415	415
Mean(μ)	108.96	114.71
Standard deviation (σ)	34.97	34.49
Coefficient of variance (COV)	32.10	30.06

Table -5: Probability of failure

$f_{ck}(N/mm^2)$	20
$f_y(N/mm^2)$	415
Probability of failure, P_f	0.32
Reliability, R	0.68

4.2 Unsymmetrical loading on RC frame

Table -6: Mean, SD and COV of moment and axial load

Location	M2	P2	M4	P4
$f_{ck}(N/mm^2)$	20	20	20	20
$f_y(N/mm^2)$	415	415	415	415
Mean(μ)	34.88	33.28	50.03	50.34
Standard deviation (σ)	6.26	4.51	11.714	10.42
Coefficient of variance (COV)	17.94	13.54	23.413	20.70

Table -7: Probability of failure

Location	2	4
$f_{ck}(N/mm^2)$	20	20
$f_y(N/mm^2)$	415	415
Probability of failure, P_f %	10^{-6}	10^{-6}
Reliability, R %	≈ 1	≈ 1

5. CONCLUSION

Attempt is made to quantify the safety level in terms of probability failure of a reinforced concrete frame. A typical RC frame is selected and designed using deterministic approach, as per the provision of IS 456-2000. Using ETABS software the frame is analysed and repeated for 100 times, every time using the generated values of design variables as input. The generated values of Action (S) in terms of bending moments at typical locations are statistically analysed and probabilistically modeled using MATLAB software. If the value of P_t (probabilistic design) more than P_t provided by the deterministic design, it is considered as failure. Such failures are counted during simulation. It is observed that rate of failure of the column section is about 32 % or probability failure is 0.32. i.e reliability 68% in symmetrical loading on the RC frame where as in unsymmetrical loading on RC frame the probability failure is very low i.e 10^{-6} and reliability is almost 100% but in reality P_f will not be equal to zero and reliability will not be equal to 100%. For important structure the P_f has to keep as low as possible.

REFERENCES

- 1.R. Ranganathan, Reliability Analysis and Design of Structures, Tata Mc Grawhill Publishing Company limited.
- 2.N.Krishna Raju, Advanced reinforced concrete design, 2nd Edition, CBS Publishers & Distributors.
- 3.Alfredo H-Sang, Wilson H. Tang – Probability Concepts in Engineering Planning and Design, Volume-2.

4.H. P. Hong and W. H. Zhou, ASCE – Reliability analysis of RC columns, journal of Structural Engineering, Volume 125, July 1999.

5.M. Ala Saadeghvaziri and Douglas A. Foutch, ASCE-Behavior of RC Columns under Nonproportionally varying axial loads, Journal of Structural Engineering, Volume 116, July 1990.

6.IS 456:2000 “Indian Standard Code of Practice for Plain and Reinforced Concrete” (Fourth revision), Bureau of Indian Standards.

7.A. J. Kappos, M. K. Chryssanthopoulos and C. Dymiotis, Uncertainty Analysis of Strength and Ductility of Confined Reinforced Concrete Members, Engineering Structures, Volume 21, September 1997.

8.Howard B. Wilson, Louis H. Turcotte and David Halpera , Advanced Mathematics and Mechanics Applications using MATLAB, Third Edition, 2003.

9.Jin- Keun Kim and Sang Soon Lee, The behaviour of reinforced concrete columns subjected to axial load and biaxial bending, Journal of Engineering Structures, Volume-23, 2000.

10.C. G. Trezos, Reliability considerations on the confinement of RC columns for ductility, Journal of Soil dynamics and earthquake Engineering, Volume-16, 1996.

BIOGRAPHIES



Manjunath.J
Currently Pursuing M.Tech, Civil Engineering, PESCE Mandya



Dr. K. Manjunath
Professor and Head, Dept. of Civil Engineering, MCE, Hassan



Naveen Kumar S
Assistant Professor, Civil Engineering, PESCE Mandya