

Tracking airborne objects using LiDAR

Aradhana Haldar¹, Abhijeet Deshpande², Prof. Pankaj Raibagkar³

¹ Student, MCA Department, SIES College Of Management Studies, Maharashtra, India

² Student, MCA Department, SIES College Of Management Studies, Maharashtra, India

³ Professor, MCA Department, SIES College Of Management Studies, Maharashtra, India

Abstract – LIDAR (Light Detection and Ranging) is an optical remote detecting technology that measures properties of scattered light to discover extent and/or other data of a distant object. The pervasive methodology to focus separation to an item or surface is to utilize laser pulses. Like the radar technology, which uses radio waves, the range to an object is controlled by measuring the time defer between transmission of a pulse and acknowledgment of the reflected sign. LIDAR has applications in topography, geography, Geomatic, paleohistory, geomorphology, seismology, ranger service, remote detecting and air physical science. [1] Uses of LIDAR incorporate ALSM (Airborne Laser Swath Mapping), LIDAR Contour Mapping. The acronym LADAR (Laser Detection and Ranging) is regularly utilized as a part of military settings. The expression "laser radar" is likewise being utilized despite the fact that LIDAR does not utilize microwaves or radio waves, which is definitional to radar. Additionally, new innovations, for example, digital image processing and Global Positioning System (GPS) providing positional data inside of cm accuracy and Geographic Information Systems (GIS), and so on can be utilized to incorporate and procedure spatial information for applications running from basic mapping to supporting resource exploration and development; from environmental administration to the arranging and organization of transportation system, urban advancement, telecommunication system, and utility infrastructures. These advancements can successfully be utilized to handle the present day complex urban issues.


Key Words: LiDAR, RADAR, Scanning, Tracking

1. INTRODUCTION

In broad terms there are two sorts of LiDAR discovery schema: "incoherent" or direct energy detection (which is basically amplitude estimation) and Coherent detection (sensitive measurements). The two sorts of pulse models are: micro pulse LiDAR systems and high energy systems in both incoherent and coherent. Micro pulse systems have developed as a result of the constantly expanding

computer power available joined with advances in laser technology.

The different major components of a LIDAR system are:

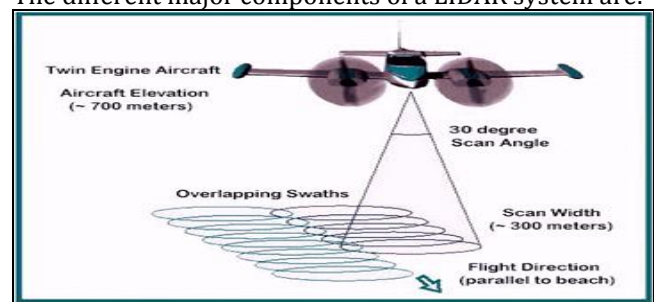

Laser — 600-1000 nm lasers are most common for non-scientific applications. They are economical yet since they can be focused and effectively captivated by the eye the maximum power is constrained by the need to make them safe for eyes. Safety of the eyes is frequently a prerequisite for most applications. A typical option 1550 nm lasers are eye-safe at much higher power levels since this wavelength is not engaged by the eye, but rather the detector technology is less exceptional thus these wavelengths are for the most part utilized at longer ranges and inferior accuracies.

Scanner and optics — How quick pictures can be produced is additionally influenced by the quickness at which it can be scanned into the system. There are a few choices to scan the azimuth and elevation, with dual oscillating plane mirrors, a mixture of polygon mirror, a dual axis scanner. Optic decisions affect the angular resolution and extent that can be found. The complete mirror or a beam splitter is choices to gather an arrival sign.

Photo detector and receiver electronics — two main photo detector technologies are used in LiDAR: solid state photo detectors. The receiver's sensitivity is another parameter that must be adjusted in a LIDAR outline.

Position and navigation systems — LIDAR sensors that are mounted on mobile platforms, for example, satellites or planes oblige instrumentation to determine the absolute position and introduction of the sensor. And these gadgets incorporates of a GPS recipient and an Inertial Measurement Unit (IMU).

2. PROBLEM DEFINITION

Current radar frameworks work by conveying radio-frequency (RF) signals created by electronic parts. They, after this, measure the reflected wave that skips off a target, to figure out where it is located and how quick it is going. [4] Be that as it may, these advances have restricted accuracy in following target's distance or speed. This is because more precision needs utilizing signals of a higher frequency (the rate at which the electromagnetic wave oscillates). However, at higher frequencies, the electronic part of radar system transmits and gets signals that are progressively noisy, or indeterminate.

To improve radar systems, LiDAR technology can be used to send out the radar signals, and then processes the return signal using photonic, or light-based, components that convert the signal to a digital waveform.

3. APPLICATION

This LIDAR-equipped portable robot uses its LIDAR to develop a guide and evade obstacles. Other than these applications, there is a wide assortment of uses of LIDAR.

3.1 . Archaeology

LIDAR has many applications in the field of archaeology including aiding in the planning of field campaigns, mapping features beneath forest canopy [3], and providing a broad overview, continuous features that may be vague on the earth. LIDAR can also offer archaeologists the ability to create high-resolution digital elevation models (DEMs) of archaeological sites that can reveal micro-topography that are otherwise hidden by vegetation. LIDAR-derived products can be easily integrated into a Geographic Information System (GIS) for analysis and interpretation.[1]

3.2 . Meteorology and Atmospheric Environment

The first LIDAR systems were used for studies of atmospheric composition, clouds, structure and aerosols. Originally based on ruby lasers, LIDAR was designed for meteorological applications shortly after the invention of the laser and represent one of the first applications of laser technology.

Elastic- backscatter LIDAR is the most basic type of LiDAR and is typically used for studies of aerosols and clouds.

Differential Absorption LIDAR (DIAL) is used for range-resolved measurements of a particular gas in the atmosphere, such as ozone, carbon dioxide, or water vapour Raman LIDAR is also used for measuring the concentration of atmospheric gases, but can also be used to retrieve aerosol parameters as well. Raman LIDAR exploits inelastic scattering to single out the gas of interest

from all other atmospheric constituents. A small portion of the energy of the transmitted light is deposited in the gas during the Doppler LIDAR is used to measure wind speed along the beam by measuring the frequency shift of the backscattered light. Scanning LiDAR, such as NASA's HARLIE LIDAR, have been used to measure atmospheric wind velocity in a large three dimensional cone [6] A Doppler LIDAR system was used in the 2008 Summer Olympics to measure wind fields during the yacht competition.

3.3 . Wind power

LiDAR is sometimes used on wind farms[4] to more accurately measure wind speeds and wind turbulence, and an experimental[5] LiDAR is mounted on a wind turbine rotor to measure oncoming horizontal winds, and proactively adjust blades to protect components and increase power.

3.4 . Physics and astronomy

A worldwide network of observatories uses LiDAR to measure the distance to reflectors placed on the moon, allowing the moon's position to be measured with mm precision and tests of general relativity to be done. MOLA, the Mars Orbiting Laser Altimeter, used a LIDAR instrument in a Mars-orbiting satellite (the NASA Mars Global Surveyor) to produce a spectacularly precise global topographic survey of the Mars. In September, 2008, NASA's Phoenix Lander used LIDAR to detect snow in the atmosphere of the Red planet.[6] In atmospheric physics, LIDAR is used as a remote detection instrument to measure densities of certain constituents of the middle and upper atmosphere, such as potassium, sodium, or molecular nitrogen and oxygen. These measurements can be used to calculate temperatures. LIDAR can also be used to measure wind speed and to provide information about vertical distribution of the aerosol particles. At the JET nuclear fusion research facility, in the UK near Abingdon, Oxfordshire, and LiDAR Thomson Scattering is used to determine Electron Density and Temperature profiles of the plasma.

3.5 . Biology and conservation

LIDAR has also found many applications in forestry. Canopy heights, biomass measurements, and leaf area can all be studied using airborne LIDAR systems. Similarly, LIDAR is also used by many industries, including Energy and Railroad, and the Department of Transportation as a faster way of surveying. Topographic maps can also be generated readily from LIDAR, including for recreational use such as in the production of orienteering maps. [6]

In oceanography, LiDAR is used for estimation of phytoplankton fluorescence and generally biomass in the surface layers of the ocean. Another application is

airborne LiDAR bathymetry of sea areas too shallow for hydrographic vessels. In addition, the Save-the-Redwoods League is undertaking a project to map the tall redwoods on California's northern coast. LIDAR allows research scientists to not only measure the height of previously unmapped trees but to determine the biodiversity of the redwood forest.

3.6 . Vehicles

LIDAR has been used in Adaptive Cruise Control (ACC) systems for automobiles. Systems such as those by Siemens and Hella use a LiDAR device mounted on the front of the vehicle, such as the bumper, to monitor the distance between the vehicle and any vehicle in front of it.[6] In the event the vehicle in front slows down or is too close, the ACC applies the brakes to slow the vehicle. When the road ahead is clear, the ACC allows the vehicle to accelerate to a speed pre-set by the driver.

3.7 . 3D mapping

Airborne LIDAR sensors are used by companies in the Remote Sensing field to create point clouds of the earth ground for further processing (e.g. used in forestry). A common format for saving these points (with parameters like, y, return, intensity, elevation) is the LAS file format.

4. 3D AUTOSCANNING

The present discovery relates to a laser scanning system and, more particularly, to a method for operating a 3-D auto scanning LIDAR system. It is regularly alluring to have PC models of vast physical structures, for example, a petroleum refinery. Computer models facilitate an understanding of the structure that is beneficial in a number of ways. The system includes a combination laser scanner and PC software system that measures, visualizes and models large structures and sites with high speed, high accuracy and over a large range. In use, the device is oriented towards the scene and the user selects the desired measurement area and measurement point spacing.

A detailed 3-D geometry of exposed surfaces is remotely captured in the form of a dense, accurate, three dimensional point clouds. The system includes a passively Q-switched pulsed laser. The laser beam is scanned over the target using computer-controlled galvo scanning mirrors. The system includes a video monitor for capturing the scene and displaying it on a computer such as a laptop. Using this video image, the operator can select the area to be scanned by the laser. The galvo mirrors direct the laser through repeated vertical scans, moving over horizontally after each vertical scan. By accurately monitoring the time of flight of each laser pulse out from

the device and back into the device, exact positional information of the target can be calculated. Each measured point has associated with its 3-D information in the point cloud. The system software can display the point cloud to the user. As discussed herein in greater detail, the point cloud can be used to directly carry out a number of procedures. In addition, the system can process the point clouds into wire meshes, 3-D models and 2-D drawings for export to popular computer-aided design (CAD) rendering or other software.

5. USES OF LiDAR

LIDAR data can be used for the following

- Measure distance and speed between two objects
- Measure elevation between two objects
- Can be used in Remote sensing applications[5]
- Measure rotation
- Measure chemical composition and concentration

6. ADVANTAGES OF LiDAR TECHNOLOGY

Alternate techniques for topographic information gathering are land surveying, photogrammetry, and interferometry. The advantages of LiDAR technology as compared to these methods are as follows:

- **Higher accuracy**
 - Vertical accuracy 5-15 cm (1)
 - Horizontal accuracy 30-50 cm
- **Fast acquisition and processing**
 - Acquisition of 1000 km² in 12 hours
 - DEM generation of 1000 km² in 24 hours
- **Minimum human dependence**
 - As most of the processes are automatic unlike photogrammetry, GPS or land surveying, there is no human dependency.
- **Weather/Light independence**
 - Data collection independent of sun inclination and at night and slightly bad weather.
- **Canopy penetration**
 - LiDAR pulses can reach underneath the canopy in this way creating estimations of points there unlike photogrammetry..
- **Higher data density**
 - Up to 167,000 pulses per second. More than 24 points per m² can be measured.
 - Multiple returns to collect data in 3D.
- **GCP independence**
 - Only a few GCPs are needed to keep reference receiver for the purpose of DGPS. There is no need of GCPs otherwise.
 - This makes LiDAR ideal for mapping inaccessible and featureless areas.
- **Additional data**

LiDAR also watches the amplitude of back dispersed energy in this manner recording a reflectance value for every data point. This information, however poor spectrally, can be utilized for order, as at the wavelength utilized a few elements may be separated precisely.

- **Cost**

It has been found by comparative studies that LiDAR data is cheaper in many applications. This is particularly considering the speed, accuracy and density of data.[1]

7. DISADVANTAGES

There are several disadvantages as well.

- The information gathering seems, by all accounts, to be cost competitive; the upfront cost of equipment procurement is extremely significant, on the order of \$1 million.
- While LIDAR is a dynamic system that can be, hypothetically, utilized 24 hours a day, it can't be utilized above cloud cover or when mist, smoke, fog, rain, or snow tempests are present.
- Moreover, high winds and turbulence will bring about issues with the inertial framework.
- While LIDAR appears to be an excellent alternative to photogrammetric mapping, there are several disadvantages to LIDAR. There are problems with data collected over water, which leads to suspect delineation of water boundaries using
- LIDAR systems are unable to determine break lines.

8. PROPOSED SYSTEM

Since the radar signal produced by laser is amazingly steady, it has less noise. That implies it could, in principle, all the more accurately track the area of objects in the sky, or on the other hand, clear a bigger physical region to rapidly check for items. So it could be used to track the locations of airplanes or make a map of a terrain.

For this purpose, the 3D autoscanning LiDAR system can be used. It can be used in planes to keep track of all the movement of an object as a detailed 3-D geometry of exposed surfaces is remotely captured in the form of a dense, accurate, three dimensional point clouds.

Having the capacity to utilize higher frequency signal also permits radar frameworks to utilize smaller radar radio waves, which implies they could hypothetically be sent in more areas.

The system includes a passively Q-switched pulsed laser. The laser beam is scanned over the target using computer-controlled galvo scanning mirrors.

Utilizing photonic parts also implies the framework is more adaptable that means it can sweep or convey signals at a wide range of frequencies. Current radar system works just for a limited scope of frequencies.

Using the video image captured by the system, the operator can select the area to be scanned by the laser. The galvo mirrors direct the laser through repeated vertical scans, moving over horizontally after each vertical scan.

The proposed system is only a model, and would require refinement to achieve that level of sophistication. In any case, in a test the framework performed as well as existing systems at tracking airplanes.

9. CONCLUSION

- It is clearly evident that many within the GIS industry are looking at LIDAR as an economical and accurate means of collecting both feature and terrain data.
- Indeed, technology is growing. Like any new technological tool, there are times when the not made conventional terrestrial surveying obsolete, LIDAR will not soon supplant photogrammetric mapping as an economical and accurate method of collecting data about features on the earth.
- As the technology matures, as new data processing techniques are developed, and as standards are developed, it is safe to say that LIDAR will become an important data collection methodology available to the user community.

REFERENCES

- [1] <http://en.wikipedia.org/wiki/Lidar>
- [2] www.monroecounty.gov/gis-index.php
- [3] <http://www.lidar-uk.com/usage-of-lidar/>
- [4] <http://www.livescience.com/44203-new-photonic-radar-technology.html>
- [5] https://en.wikipedia.org/wiki/Remote_sensing
- [6] <http://www.lidar-uk.com>