

ANALYSIS AND COMPARISON OF DIAGRID AND CONVENTIONAL STRUCTURAL SYSTEM

Raghunath .D. Deshpande¹, Sadanand M. Patil², Subramanya Ratan³

¹Assistant Professor, Dept of Civil Engineering, Gogte Institute of Technology Belagavi, Karnataka, India

²Assistant Professor, Dept of Civil Engineering, Gogte Institute of Technology Belagavi, Karnataka, India

³ Post Graduate Student in Structural Engineering, Dept of Civil Engineering, Gogte Institute of Technology Belagavi, Karnataka, India

Abstract

Advances in materials, construction technology, analytical methods and structural systems for analysis and design initiated development of tall Structures. Structural design for tall structures is governed by horizontal forces due to earthquake and wind load. Lateral load is resisted by exterior structural system or interior structural system. Usually braced frame, shear wall core and their combination with frames are interior system, where lateral force is resisted by centrally located elements. Diagrid structural systems adopted in tall Structures due to its flexibility in floor area and structural. Diagrid consists of inclined columns on the façade. Due to inclined columns lateral loads are resisted by axial action of the diagonal compared to bending of vertical columns in framed tube structure. Diagrid structures generally do not require core because lateral shear can be carried by the diagonals on the periphery of building. Analysis and design of 60 storey diagrid steel building is presented. A regular floor plan of 24 m × 24 m size is considered. ETABS software is used for modeling and analysis of structural members. All structural members are designed as per IS 800:2007 considering all load combinations. Dynamic along wind and across wind are considered for analysis and design of the structure. Later both Conventional and Diagrid Structural Systems are compared.

Key Words: Diagrid, Conventional Structural System, E-TABS, Optimum Angle, Diagonals, Tracking Nodes, Axial force.

1. INTRODUCTION

1.1 General

Tall buildings have developed in response to the requirements arising from the continuing increase in world population. In recent times, the demand for these buildings is increased enormously, especially driven by environmental considerations. In the resource scarce era, expanding a building vertically to develop a denser city is more energy efficient because the energy consumed for transferring electricity can be minimized, while the land used for building will be reduced and thus saving more green areas. Therefore, through this project an attempt has been made to arrive at a structural pattern which is superior as compared to conventional structural systems.

In the tall structures, structural pattern can be manipulated to optimize the performance. By arranging the structural members in a particular pattern, efficient structure can be produced, whereas the economy can be increased by grouping structural member dimensions according to their arrangement. Moreover, by a high performance pattern, member sizes can be minimized and thus opening areas can

be maximized. In terms of expressiveness, the use of a certain pattern in a tall building can produce a unique architectural appearance. Therefore the present trend has been for more buildings to employ non routine structural patterns. With this project we want to present non-routine structural patterns as an alternative to replace the orthogonal pattern.

2. DIAGRID

2.1 What is Diagrid?

“DIAGRID (a portmanteau of diagonal grid) is a design for constructing tall buildings with steel that creates triangular structures with diagonal support beams.” It is triangulated beam system which may be curved or straight, and horizontal beams that make structural system for high rise structure. The difference in exterior-braced conventional frame structural pattern and the diagrid structural pattern is that these buildings do not use conventional vertical columns.

2.2 Principle of Diagrid

The DIAGRID framework offers a few focal points notwithstanding disposing of veneer sections. Most quite it

upgrades each basic component. Ordinarily, segments are utilized to convey vertical burdens, and diagonals give steadiness and imperviousness to substantial strengths, for example, wind and seismic burdens. Yet, Rahimian [structural architect for the Hearst Tower] says that diagonals and props "need" to convey vertical burden and the segments need to convey sidelong load under perfect presumptions in an average tall structure. In a DIAGRID auxiliary framework the two capacities are hitched, he says. "The sections, diagonals and bracings all are one." - "Milestone Reinvented" by Brian Fortner.

3. METHODOLOGY

3.1 Gravitational and Lateral Load Calculations

The Gravity force includes the Dead load and Live load. The live load on the floor will remain constant across all the structural systems considered. Dynamic Analysis for wind force calculations will be in accordance with IS 875 (Part 3) to discern the Lateral load.

3.2 Geometrical Specifications

Based on the analysis and design from ETABS the most economical section of the members is obtained.

3.3 Common Building Parameters

Table.3.1: Common Building Parameters

DESCRIPTION	VALUE
Height	180m
Width	24m(Square plan)
Core wall dimension	12mx12m
No of storeys	60
Core wall thickness	250mm
Storey height	3m
Floor slab	150mm

3.4 PLAN

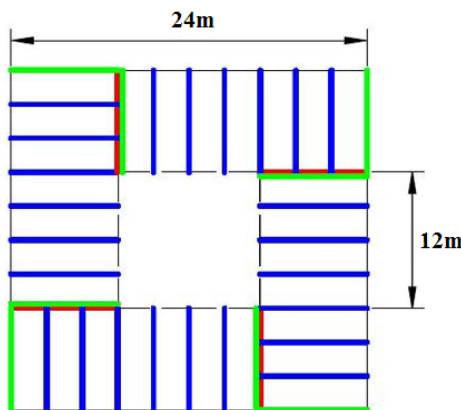


Fig.3.1: Plan

3.5 Load Combinations

Table.3.2: Load Combinations

Sl.No	Combination	Purpose
1	1.5x(Dead Load)+1.5x(Live Load) $(1.5 \times 3.9) + (1.5 \times 3.5) = 11.1$ kN/m ²	For design of floor frame
2	Dead Load + Live Load $3.9 + 3.5 = 7.4$ kN/m ²	To check deflection

The load combinations applicable for the design perimeter structure are;

- 1.5(D.L.) + (W.L.) design
- 1.2(D.L.) + 1.2(L.L.) + 0.6(W.L.)

Whereas,

- D.L. – Dead Load
- L.L. – Live Load
- (W.L.)design – design Wind load

Load case (a) is found to be the most critical. The design and analysis of the perimeter structure is carried out for load case (a) by taking the input from floor frame and wind load analysis. The sections obtained are then checked by considering the other load case.

4. CALCULATION OF DESIGN WIND FORCES

4.1 Wind Data

The height to least lateral dimension is more than 5, (180/24) Dynamic analysis is needed.

(IS875 (Part 3) - 1987, Sec 7.1)

1. Basic Wind Speed, $V_b = 33$ m/s
2. Terrain category = 2 "Analysis and Comparison of Diagrid and Conventional Structural System"

4.2 Design Factors

1. Risk coefficient factor, $k_1 = 1$
(IS875 (Part 3) - 1987, Sec 5.3.1, Table-1)
2. Terrain and height factor, k_2 - Varies with height as shown in Table-2
(IS875 (Part 3) - 1987, Sec 5.3.2, Table-2)
3. Topography factor, $k_3 = 1$
(IS875 (Part 3) - 1987, Sec 5.3.3.1)

4.3 Design Wind speed (V_z)

$$V_z = V_b \times k_1 \times k_2 \times k_3$$

$$= 33 \times 1 \times k_2 \times 1$$

= 33 x k₂ m/s
(IS875 (Part 3) - 1987, Sec 5.3)

4.4 Design Wind Pressure (Pz)

$P_z = 0.6 \times (V_z)^2$
(Table-33, IS875 (Part 3) – 1987)

4.5 Wind Loads

The design wind loads are applied as ‘Floor loads’ along the x-axis.

Table.4.1: Wind Pressure For Various Modules

Module	Floor	Height (m)	P(Avg.) kn/m ²	V(Avg.) kn/m
M10	54-60	180	1.03	3.10
M9	48-54	162	1.01	3.05
M8	42-48	144	1.00	3.00
M7	36-42	126	0.98	2.95
M6	30-36	108	0.96	2.90
M5	24-30	90	0.93	2.80
M4	18-24	72	0.90	2.70
M3	12-18	54	0.88	2.65
M2	6-12	36	0.80	2.40
M1	1-6	18	0.76	2.30

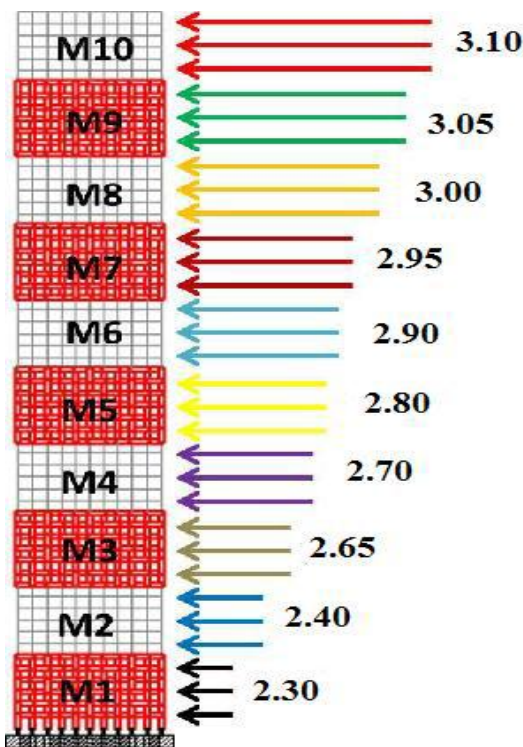


Fig 4.1 Wind Pressure For Various Modules

5. TRACKING NODES

In the module, a node which is having maximum deflection is defined as ‘Tracking Node’. Tracking nodes are must in order to compare actual deflection with theoretically determined limiting deflection. The actual deflection values of the tracking nodes must be less than the theoretical deflection values. Tracking nodes are placed at each module there by facilitating deflection check at particular intervals.

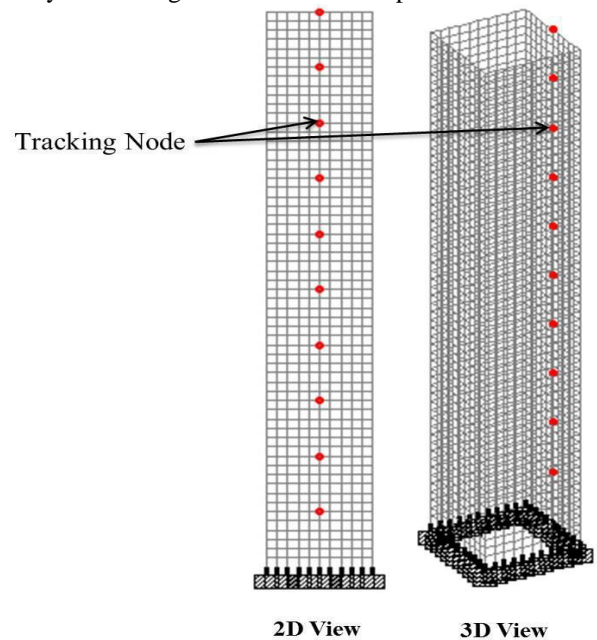


Fig 5.1 Tracking Nodes

6. CONVENTIONAL STRUCTURAL SYSTEM

6.1 DESIGN OF PERIMETER STRUCTURE

6.1.1 Stiffness-Based Design

For tall structures with large aspect ratio, stiffness constraint will dominate the design. According to IS875-Part 3, horizontal displacement at top story should be limited to less than H/500 (where ‘H’ is the height of the structure).

6.1.2 Structural Details

- Floor to floor spacing – 3m
- Column to column spacing – 6m

In tall steel structure, the story height is kept quite large because the beam will be having large depth. Keeping this in hindsight floor height of 3m is provided. To reduce the complexity in assigning the force on the computer model and hence simplifying the structural analysis of the building, column spacing of 6m is provided. ‘Strong’ bending direction of the column is aligned along the face of the structure.

6.1.3 Design Section

From the ETABS analysis the following table gives the sections of conventional structure.

Table 6.1 Total Steel Usage For Conventional Structural System

COLUMN SECTION							
Story	Web Depth	Web Tks	Flange Tks	Flange width	Tot. Length of Col.	No. of Sections	Total weight(tons)
40-60	1040	130	130	1300	60	16	3566.04
20-40	800	100	100	1000	60	16	2110.08
1-20	560	70	70	700	60	16	1033.94
TOTAL WEIGHT							6710.05
BEAM SECTION							
Beam Type	Depth mm	Web Tks	Flange Tks	Flange width	Length of Beam (m)	No. of Sections	Total weight(tons)
Core beam	400	50	50	500	6	2400	7912.8
Facade beam	320	40	40	400	6	300	633.024
TOTAL WEIGHT							8545.82
TOTAL STEEL IN TONS 15255.88							



Fig.6.2: Graph showing Deflection at various floors.

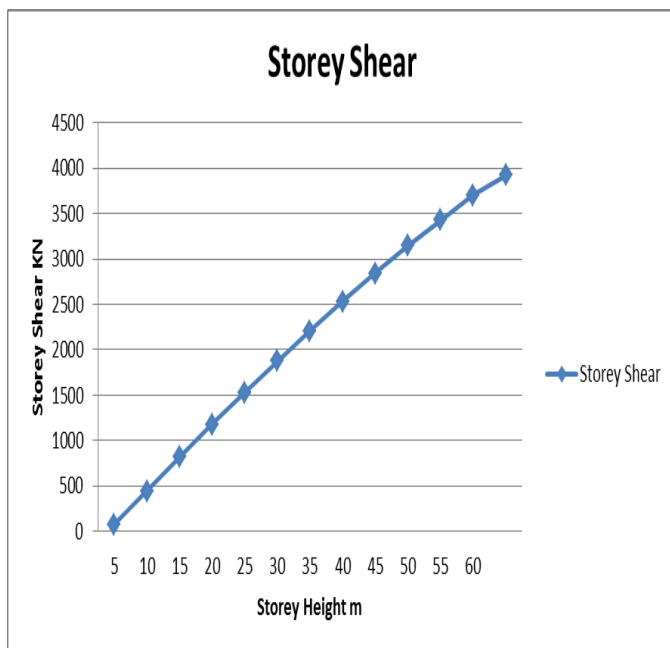


Fig.6.1: Graph showing Storey Shear at various floors.

7. DESIGN OF DIAGRID

7.1 DESIGN OF PERIMETER STRUCTURE

7.1.1 Structural Details

- Storey height – 4m
- Steel sections – Circular Hollow Sections (CHS)
- Diagonal angle – 72° (1-36 floors)
56° (36-60 floors)

The main objective of the project is to compare the efficiencies of conventional and diagrid structural patterns for tall structure and this is possible only when both the structures share the same design aspects. Since the storey height of 3m was adopted in conventional rectangular pattern, the same is maintained for the diagrid structure.

In diagrid structures, the sections on the façade are inclined and hence termed as Diagonal members. The spacing of diagonals depends on the angle i.e. the angle between the diagonal member and the horizontal plane. In diagrid structural system, diagonal members carry moment as well as shear. Therefore, diagonal angle depends on the structure height. As we know optimal angle for column is 90 degrees for maximum bending rigidity and for diagonals is 35 degree for maximum shear rigidity, it is found that the optimal angle for diagonal elements for diagrid structures will be within 90 degree and 35 degree. Optimal angle increases as structure height increases. Based on optimal design analysis carried out with different angles and different cases, it is seen that 62 degrees will be effective diagonal angle for the 35 to 45 story diagrid structural patterns and it is found around 70 degrees for all above 50 story diagrid buildings.

Circular Hollow Sections (CHS) are adopted, because of their high efficiency relative to other sections.

Design Sections

Table.7.1: Total Steel Usage For Diagrid Structural System

DIAGONAL SECTION							
Story	Outer Dia	Inner Dia	Thickness mm	C/S Area m ²	Length of Dia (m)	No. of Sections	Tot. weight tons
48-60	400	360	50	0.023	21.5	32	128.97
36-48	600	530	70	0.062	21.5	32	335.57
1-36	900	780	120	0.150	37.5	48	2237.58
TOTAL WEIGHT							2702.12
BEAM SECTION							
Beam Type	Depth mm	Web Tks	Flange Tks	Flange width	Length (m)	No. of Sections	Tot. weight tons
Core beam	400	50	50	500	6	2400	7912.8
Facade beam	320	40	40	400	6	300	633.024
TOTAL WEIGHT							8545.82
Total steel in tons							11247.94

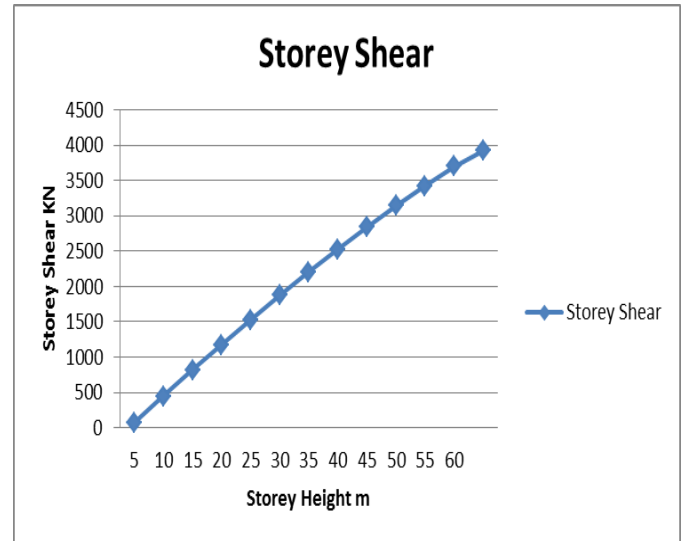


Fig.7.2: Graph showing Storey Shear at various floors.

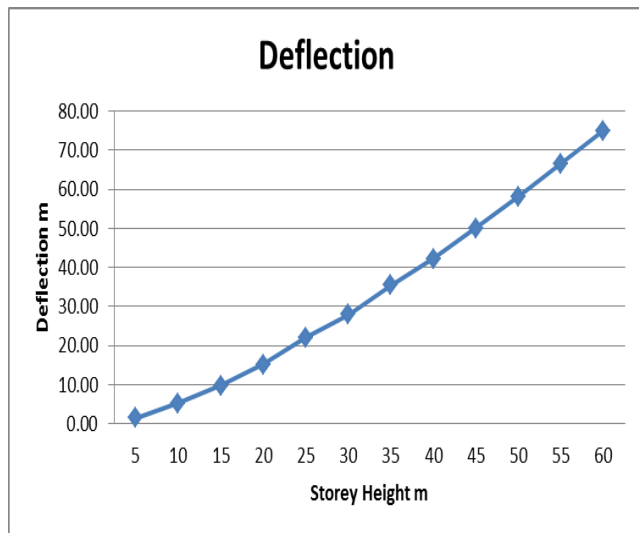


Fig.7.1: Graph showing Deflection at various floors.

PERFORMANCE COMPARISON

8.1 DIAGRID vs. CONVENTIONAL BUILDING

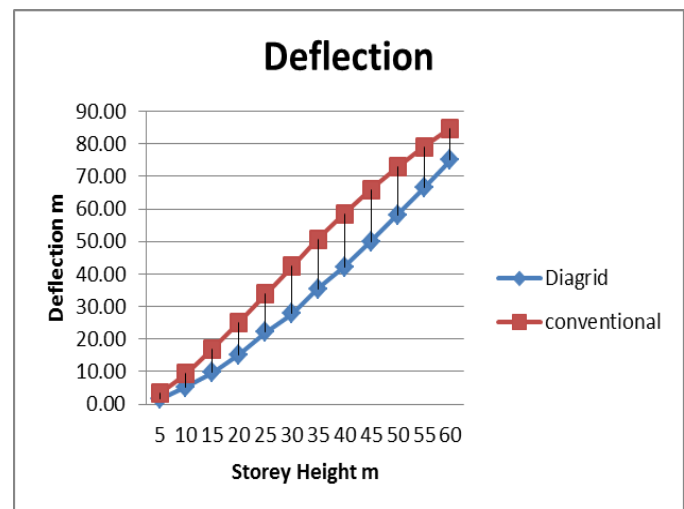


Fig.8.1: Graph comparing deflection of both structural systems at various floor height

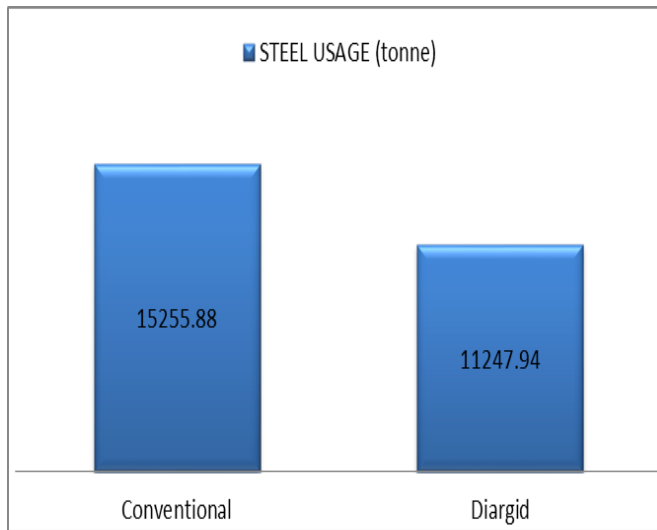


Fig.8.2: Comparison of steel usage of both structural frames

Compared to Conventional Structure, Diagrid Structure has,







- More opening area
- Less Deflection
- 28% less steel usage

CONCLUSION AND DISCUSSION

9.1 CONCLUSION

- Diagrid performs better across all the criteria of performance evaluation, such as, efficiency, expressiveness and sustainability.
- Structure has comparatively less deflection.
- Structural weight is reduced to greater extent.
- Due to this structure has more resistance to lateral forces
- Cost effective and Eco-friendly.
- Diagrid uses 11247 tonnes of steel which is 28% less compared to the conventional orthogonal building which uses 15255 tonnes.

Table.8.1: Performance comparison between conventional and diagrid structure

Crit eria	Sub- Criteria	Conventional Structure	Diagrid Structure
	Pattern		
EFFI CIEN CY	Weight (tonne)	15255.88	11247.94
EXP RESS IVEN ESS	Innovatio n		
	Visual appeal		
MAX DEF LEC TION	mm	84.90	75.00

10. REFERENCES

- [1]. Moon, K., Connor, J. J. and Fernandez, J. E. (2007). Diagrid Structural Systems for Tall Buildings: Characteristics and Methodology for Preliminary Design.” The Structural Design of Tall and Special Buildings (Vol. 16)”.
- [2]. Moon, K. S. (2008). “Material Saving Design Strategies for Tall Buildings”. CTBUH 8th World Congress.
- [3].Smith, B.S., & Coull, A. (1991). “Tall Building Structures Analysis and Design”. New York: John Wiley & Sons, Inc.
- [4]. Taranath, B. S. (1988). “Structural Analysis and Design of Tall Buildings”. New York: McGraw-Hill Book Company.
- [5]. Wong, R. “The construction of Super High-rise Composite Structures in Hong Kong”. City University of Hong Kong.
- [6]. IS:875 (Part 2) – 1987. (March 1989). New Delhi: Bureau of Indian Standards.
- [7]. Khajuria, A. (2008). “Estimation of Wind Loads in Tall Buildings”. M.Tech thesis submitted to Thapar University, Patiala..
- [8]. . “Explanatory Handbook on IS:875 (Part 3)” – 1987. (2001). New Delhi: Bureau of Indian Standards.

BIOGRAPHIES



Raghunath .D. Deshpande (M.tech structural Engg.)

Assistant Professor, Civil Engineering Department, Gogte
Institute of Technology Belagavi, Karnataka, India.



Sadanand M. Patil (M.tech structural Engg.)

Assistant Professor, Civil Engineering Department, Gogte
Institute of Technology Belagavi, Karnataka, India.



Subramanya Ratan (M.Tech Scholar)

M.Tech Scholar, Civil Engineering Department, Gogte
Institute of Technology Belagavi, Karnataka, India.