

Evaluation of Non uniform bed load transport rate for steep slope gravel bed river

Sahita I Waikhom¹, Dr. S.M.Yadav², Manali Shah³

¹Associate Professor, Civil Engineering Department, Dr. S. & S. S. G.G.E.C, Gujarat, India

² Professor, Civil Engineering Department, Sardar Vallabhai National Institute of Technology, Ichhchanath, Gujarat:

³ Ex-P.G. Research Scholar, Water Resources Management, Civil Department, Dr. S. & S. S. G.G.E.C, Gujarat, India,

Abstract - *The erosion and deposition activity in river results in altering the sediment movement within the channel and hence affect the carrying capacity of river. Bed load transport has been the subject of extensive research since the pioneering work of Du Boys (1879). Many researchers have computed the bed load transport of uniform sediment to a fair degree of accuracy. However, natural river sediments are generally non uniform particularly in gravel bed river, and the bed load) movement in case of such sediments is quite complex. Sediment transport formulas for coarse sediments and steep slopes have been considered traditionally to be bed load equations (Smart 1984). So the present study aims to analyse the predictability of transport functions of Smart (1984) which consider the non-uniformity of sediment size as well as the effect of high slope using field data set. Various statistical parameter like discrepancy ratio, Root mean square error, Mean normalized error are calculated to test the predictability of Smart bed load transport function.*

Key Words: *Non uniform bed load transport, coarse sediment, steep slope, Mean Normalized error, Discrepancy Ratio.*

1. INTRODUCTION

Bed-load transport has been the subject of extensive research since the pioneering work of Du Boys (Garde and Ranga Raju, 1985) and others. With the present state of knowledge, it is possible to compute the bed-load transport rate of uniform sediments with a fair degree of accuracy. However, computation of the bed-load transport rate in the case of non-uniform sediment which is typical of natural sediments—is quite complex because of the presence of particles of various sizes and their interactions. The pioneering research to fractionally calculate the non-uniform bed-material load transport rate is attributed to Einstein (1950). The effect of the presence

of one size of particle on the transport rate of another size in the case of a non-uniform sediment is supposed to be taken care of through several correction factors introduced by Einstein (1950). Subsequent to the publication of his paper, many checks on Einstein's methods, using data for non-uniform sediments, have shown that agreement between the measured and computed total bed-transport rate is not satisfactory. Ashida and Michiue (1971), Parker et al. (1982), Parker, G. (1990a), Mittal et al. (1990), Bridge and Bennett (1992), Wilcock, P.R. and Mcardell, B.W. (1993), Patel and Ranga Raju (1996), and Fang and Yu (1998), Wu et al. (2000) proposed several methods for calculating the fractional transport rate of non-uniform bed-load. Hsu and Holly (1992) also proposed a method to predict the gradation of non-uniform bed-load by considering the probability and availability of moving sediment. Misri et al. (1984) emphasized the limitations of Einstein's (1950) method. Meyer-Peter and Muller (1948), Bagnold (1966), Hayashi, et al. (1980), Proffitt and Sutherland (1983), Van Rijn (1984 a), Samaga et al. (1986 a), Swamee and Ojha (1991), and Samaga et al. (1986) proposed methods to account for the non-uniformity of sediment in the calculation of bed-load transport rates. However, conventional transport equations typically overestimate bed load volumes in steep mountain streams by up to three orders of magnitude. This may be due to calibration of developed formulae with data from flume experiments or low gradient streams, with channel bed and transport characteristics that differ from those in steep mountain streams or for gravel bed stream of high slope. Sediment transported are highly influenced when flow under gravity with nonzero component acting parallel to the surface on which sediment is being transported and this situation is commonly occurring in river. Smart (1984) developed equation for predicting bed load rate for non-uniform sediment considering the effect of high slope. Due to the limitation of river data for evaluating fractional bed load computation, effort has been made in this study to predict non uniform bed load transport for higher slope. Smart (1984) non uniform bed load transport function is selected to test the predictability for gravel bed river with high slope.

2. METHODOLOGY AND DATA COLLECTION

For the present study, predictability of Smart (1984) non uniform bed load transport function is analysed using wide range of river data. Formulation of the selected function is summarized as below.

Smart (1984): The method of Smart (1984) is based on Meyer-Peter Mueller (1948) bed load discharge equation for natural stream. The effect of non-uniformity in sediment grain size was then investigated for sediment mixtures with $\frac{d_{90}}{d_{30}}$ values up to 8.5, and developed the following equation:

$$\Phi = 4 \left[\left(\frac{d_{90}}{d_{30}} \right)^{0.2} S^{0.6} C \theta^{0.5} (\theta - \theta_{cr}) \right] \quad (1)$$

Where θ = dimensionless shear stress

θ_{cr} = the critical dimensionless shear stress

introduced by Shields (1936)

C=flow resistance factor (conductivity) = $V/(g H S)^{0.5}$,

V = mean flow velocity, d_{90} and d_{30} are the grain diameters for which, respectively, 90% and 30% of the weight of a non-uniform sediment sample are finer. S= channel slope, (dimensionless quantity)

Data collected for the present study:

For the present studies, experimental data set of Recking, A.(2010) for following river are used and the range of hydraulic parameters are given in Table 1.

1. Blue river below Green Mountain Reserv data
2. Chultinana River below canyon near Talkeetna, Alaska Data
3. Muddy creek near Pinedale data
4. Lower South Fork of Williams Fork near Leal data.

Table -1: Range of hydraulic data for the collected River Data Recking, A.(2010)

Data sets	Blue river	Chultinana River	Muddy Creek	Lower South Fork of Williams Fork
Slope (m/m)	0.0026	0.00039-0.0026	0.0012	0.016
Discharge (m ³ /s)	18-46.1	212- 7104	0.18-1.51	1.05-7.05
Flow depth (m)	0.68-1	1.7-3.6	0.16-0.52	0.34-0.56

Avg. velocity (m/s)	0.81-1.3	1.2-2.7	0.25-0.76	0.39-1.4
D ₁₆ (m)	0.004	0.002	0.0004	0.01
D ₅₀ (m)	0.058	0.0008	0.0008	0.072
D ₈₄ (m)	0.22	0.052	0.002	0.224
D ₉₀ (m)	0.258	0.062	0.0028	0.28

3. DATA ANALYSIS

Smart (1984) bed load predictor is tested for four natural rivers collected from Recking, A.(2010) data sets. Limitations, deficiencies and drawback of the selected transport formulae will be analysed by the following process. The discrepancy ratio (ratio of calculated value to measured value) for each set of data is considered for comparison of performance. Various statically parameters like root mean square error and percentage error (mean normalized error). Inequality coefficient were also calculated to test the predictability.

To examine the accuracy of the model, the computed bed load transport rate using the selected four river data viz; Blue River data ,Chultinana river data ,Muddy creek data and Lower South Fork of Williams Fork near Leal data are plotted in Fig 1, 2, 3 and 4. The solid line represents the line of equal or perfect agreement.

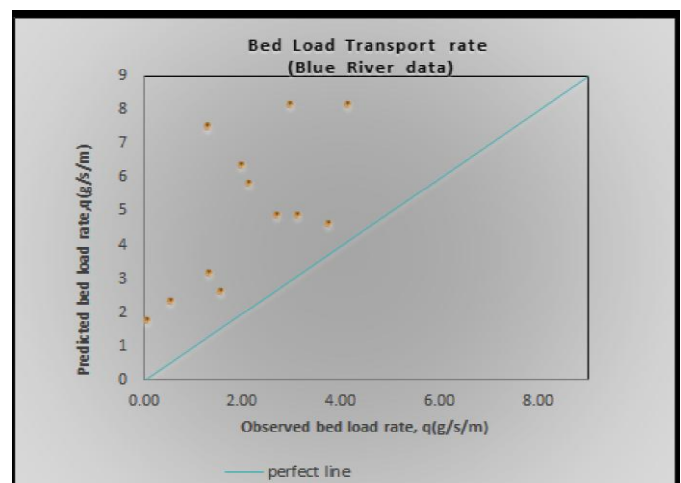


Chart -1: q using blue river data is plotted against q predicted

From the Chart 1, Smart (1984) bed load transport function over predicts for blue river data and needs further analysis.

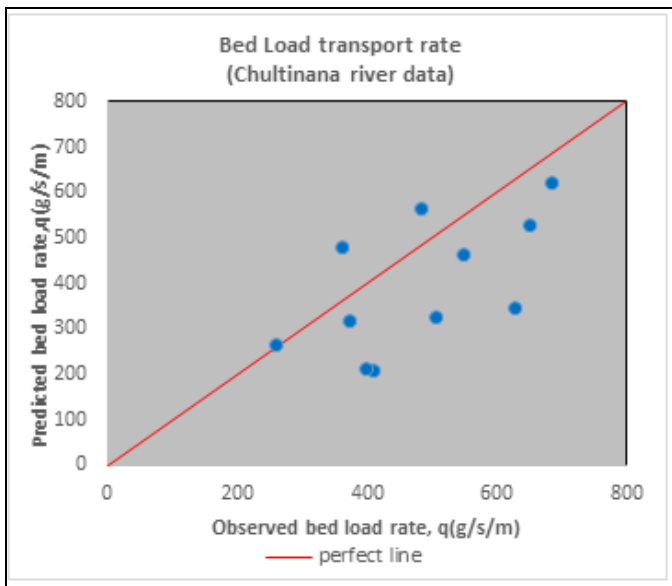


Chart -2: q using Chultinana River data is plotted against q predicted.

The above model of bed load transport rate under predicts as well as over predict giving half equal value.

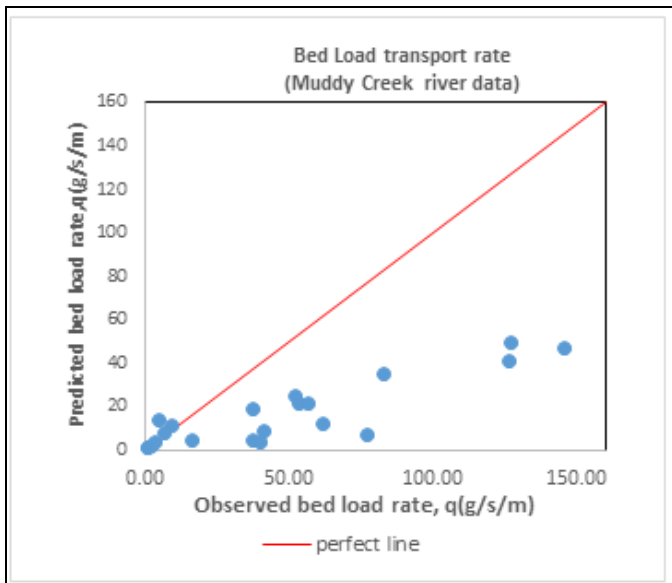


Chart -3: q using Muddy Creek River data is plotted against q predicted.

The above Chart 3 shows the prediction of bed load rate under predict and scatter to large value from the line of equality and some values are over predict and near to the line of equality.

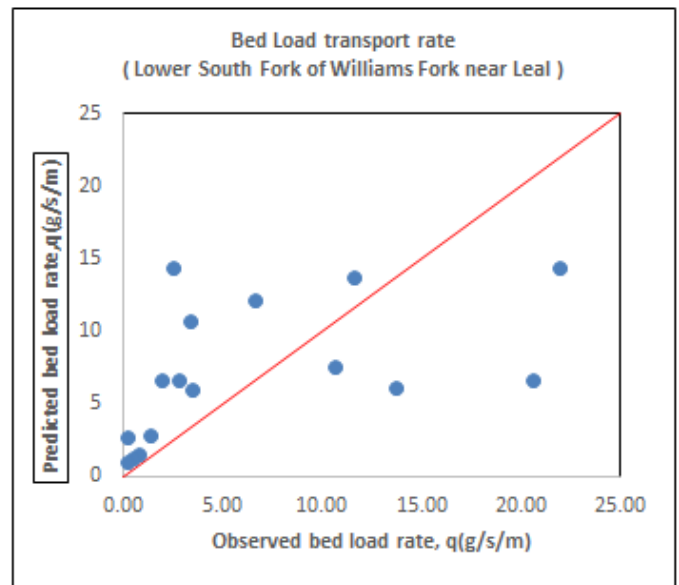


Chart -4: q using Lower South Fork of Williams Fork near Leal river data is plotted against q predicted.

From the above Fig 4, it is observed that the prediction of bed load rate under predict as well as over predict and scatter to large extent from the line of equality.

Sr. No.	Reckin g, A. (2010)	Root Mean Square Error (RMSE)	Discrepancy Ratio (predicted/measured)	Inequality Co-Efficient (U)	MNE (%)
1	Blue river	3.3	2.36	0.42233	29.86
2	Chultinana River	148.017	0.72	0.151862	-12.29
3	Muddy Creek	55.98	0.35	0.50	-24.73
4	Lower South Fork of Williams Fork	5.3	1.13	0.3	230.65

3. CONCLUSIONS

Following findings can be summarized from the analysis of computed and observed bed load transport rate.

1. The formula proposed by Smart bed load transport function over predicts for Blue River below Green Mountain R. data as well as for Lower South Fork of Williams Fork near Leal data.

2. Smart (1984) bed load transport functions under predict for Chultinana River below canyon near Talkeetna, Alaska data and for Muddy Creek near Pinedale River data.
3. It is also observed that Smart (1984) bed load functions predicts to nearly double time the observed value for Blue River Data giving mean normalized error of 29.86 %.
4. Evaluation revealed that Smart (1984) transport function predicts well for Chultinana River data. with minimum discrepancy from the observed value giving discrepancy ratio near equal to 1 and mean normalized error of -12.6 % where the sediment size are large and for high flow transport.
5. Smart (1984) bed load functions poorly predict Lower South Fork of Williams Fork near Leal River data.
6. Overall consistency in the prediction is not observed for the present selected range of hydraulic river data.

REFERENCES

- [1] Ashida, K. and Michiue, M, An investigation of river bed degradation downstream of a dam, Proc. 14th Congress of the IAHR. ,1971.
- [2] Bagnold, R.A, An approach to the sediment transport problem from general physics, U.S. Geological Survey Professional Paper 422-J, 1966.
- [3] Bridge, J.S. and Bennett, S.J, A model for the entrainment and transport of sediment grains of mixed sizes, shapes and densities, Water Resources Research, Vol.28, No.2, pp.337-363. ,1992.
- [4] Du-boys M. P, Le Rhone et les Rivieres a Lit affouillable, Annales de Ponts et Chaussées, sec. 5, Vol. 18, pp. 141-195. 1879.
- [5] Einstein, H. A. (1950). The bed load functions for sediment transport in open channel flow. Tech. Bulletin No. 1026, United States Department of Agriculture, Washington, D.C.
- [6] Fang, D. and YU, G.L, Bedload transport in cobble-bed rivers, Proc. Of International Water Resources Engineering Conference, Memphis, USA, 1998.
- [7] Garde, R.J. and Raju, K.G, Mechanics of Sediment Transportation and Alluvial Stream Problems. 2nd Edition, Wiley Eastern Limited, 1985.
- [8] Graeme M. Smart, Sediment transport formula for steep channels, Journal of Hydraulic Engineering, Vol.110, No.3, 1984.
- [9] Hayashi, T.S., Ozaki and T. Ichibashi , Study on bed load transport of sediment mixture, Proc. 24th Japanese Conference on Hydraulics,1980.
- [10] Hsu, E.M. and Holly, F.M, Conceptual bed-load transport model and verification for sediment mixtures, J. of Hydraulic Engineering, ASCE, Vol.118, 1992.
- [11] Meyer-peter, E. and Mueller, R,Formulas for bed-load transport, Report on Second Meeting of IAHR, Stockholm, Sweden,39-64,1948.
- [12] Misri, R.L., Ranga Raju, K.G. and Garde, R.J. Bed load transport of coarse non uniform sediments, J. of Hydraulic Engineering, ASCE, Vol.110, No.3, pp.312-328,1984.
- [13] Mittal, M.K., Porey, P.D. and Ranga Raju, K.G, Bed load transport of non uniform sediments, Proc. of the Euromech 262-Colloquium on Sand Transport in Rivers, Estuaries and the Sea, Wallingford,U.K ,1990.
- [14] Patel, P.L. and Ranga Raju, K.G., Fraction wise calculation of bed load transport, J. of Hydraulic Research, Vol.34, No.3,1996.
- [15] Parker, G., Kilingeman, P.C. and Mclean, D. G. Bed load and size distribution in paved gravel-bed streams, J. of Hydraulic Division, ASCE, Vol.108, No.4, 1982.
- [16] Parker, G, Surface-based bedload transport relation for Gravel Rivers. Journal of Hydraulic Research. 28(4): 417-436, 1990a.
- [17] Prabhata, K. Swamee , Chandra Shekhar, P. Ojha, Bed-load and suspended-load transport of non uniform sediments, J. Hydraul. Eng., 117:774-787, 1991.
- [18] Proffitt, G. J., and Sutherland, A. J. Transport of non uniform sediment, J. Hydr. Res., 21(1), 33-43,1983.
- [19] Recking, A., A comparison between flume and field bedload transport data and consequences for surface based bedload transport prediction, Water Resources Research 46, 1-16, 2010.
- [19] Samaga, B.R., Ranga Raju, K.G. and Garde R.J, Bed load transport rate of sediment mixture, J. of Hydraulic Engineering, No.11, pp.1003-1018, 1986a.
- [20] Van Rijn, Sediment transport, Part I: Bed load transport , Journal of Hydraulic Engineering, Vol. 110, No. 10, Paper No. 192,1985.
- [21] Wu W. Wang S.S.Y. and Jia Y, Non-uniform sediment transport in alluvial rivers, Journal of Hydraulic Research, IAHR, Vol..38, 2000.
- [22] Wilcock, P.R. and Mcardell, B.W. Surface-based fractional transport rate: mobilization thresholds and partial transport of a sand-gravel sediment, Water Resources Research, Vol. 29, No.24, 1993,

BIOGRAPHIES

Smt. S. I. Waikhom, Associate Professor in Civil Engineering Department of Dr. S & S S Ghandhy Govt. Engg, College, Surat. Has teaching experience of 14 years, both U.G. and P.G. courses. Has done M.Tech (WRM) first class with distinction and pursuing Ph.D in WRE at SVNIT as PEC.



Dr. S. M. Yadav is professor in civil engineering department of SVNIT, Surat. He has teaching experience of more than 19 years and has guided several M. Tech and Ph. D students. He has published many papers in International and National Journal and conferences.



Manali Shah is recently passed M. Tech student who was guided by Smt. S I Waikhom and has also presented few papers in national conference and journals from her research work.