

Survey Paper on Smart Surveillance System

Shivprasad Tavagad¹, Shivani Bhosale², Ajit Prakash Singh³, Deepak Kumar⁴

¹ Student, Computer Department, Savitribai Phule Pune University, Maharashtra, India

² Student, Computer Department, Savitribai Phule Pune University, Maharashtra, India

³ Student, Computer Department, Savitribai Phule Pune University, Maharashtra, India

⁴ Student, Computer Department, Savitribai Phule Pune University, Maharashtra, India

Abstract - This paper deals with the survey of Smart surveillance monitoring system using Raspberry pi. Video Surveillance is important as far as security is concerned these days. Commercial spaces, schools and hospitals, warehouses and other challenging indoor and outdoor environments require high end cameras. The current technologies require RFIDs which are costly and hence the security domain in all becomes expensive and hence there was a need to work on this. This paper describes the use of low cost single on board computer Raspberry Pi. This new technology is less expensive and in this project it is used as a standalone platform for image processing. It increases the usage of mobile technology to provide essential security to our homes and for other control applications. The proposed home security system captures information and transmits it via a 3G Dongle to a Smart Phone using web application Raspberry pi.

Key Words: Raspberry Pi, Video4Linux, IEEE 802.11, MPEG-2 Algorithm, Short Message Service.

1. INTRODUCTION

Fast development in the technology has increased the risk of intrusion. Using security cameras allows a person to monitor his property. The majority of organization and administrations are making use of such security cameras with the intention to save their business as well as property from terrorists and illegal entry. Nowadays, the security cameras have become much more advanced, reasonable, smaller and straight forward.

1.1 Benefits of Video Surveillance

1. Availability- There was a time when the surveillance techniques were utilized only in shopping centers and malls. Now-a-days, you can notice closed-circuit televisions almost at any place you visit, from a small store to homes and holy places. As a result, they guarantee greater public security at a fraction of the cost.

2. Real-time monitoring- Traditionally big organizations have always had the benefits of video surveillance manned by security professionals. In the past times, the capturing and transmission used to take time. But, modern technologies let users to check and reply to alarms immediately.[8]

1.2 Why Smart Surveillance?

In our busy life we don't have much time to monitor and to keep a watch on everything. From every family most of the members are working, or even in malls and hospital to monitor each and every space is not possible. It's 21st century and we need to think smartly to make our life better, easier and secure, so instead of sitting at once place for longer why not carry the security in our pocket.

2. LITERATURE SURVEY

In [1] earlier system has many problem such as such as high cost, low intelligence, poor stability, weak security. In order to solve these problems, S3C2440 microprocessor is adopted in this embedded video acquisition system, which combing with the Linux operating system. Video capture is realized by the Video 4 Linux [1]. This paper has advantages such as higher intelligence, higher stability, and easy installation and disadvantage as it requires high cost and continues GSM network is required to send message, if the network is not available this project may not work properly. Below is the diagram showing the flowchart of Video4Linux that has been used in this paper.

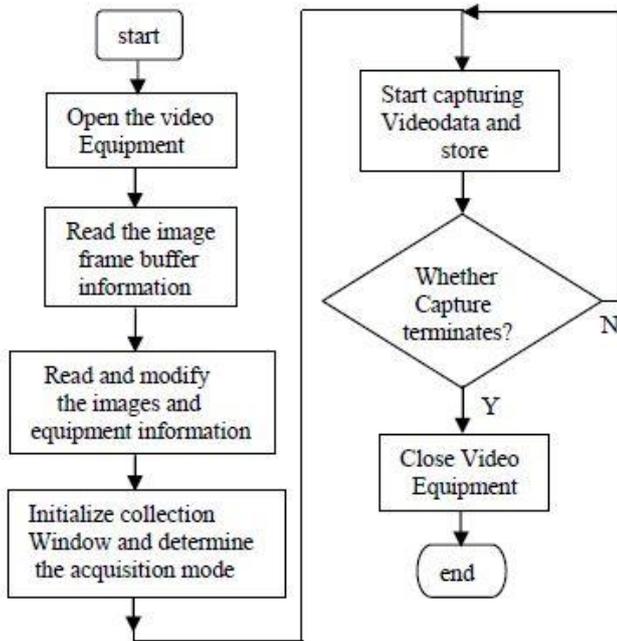


Chart -1: Flowchart of V4L video capture

In [2] the design and implementation of a video surveillance system based on 3G wireless mobile Internet access is proposed. A database in the video control server to automatically store the selected frames of the video stream data is implemented. A high-speed video monitoring sub-system using 802.11 in our surveillance system is also realized. [2] Below shows the architecture of video surveillance system that is used in this paper.

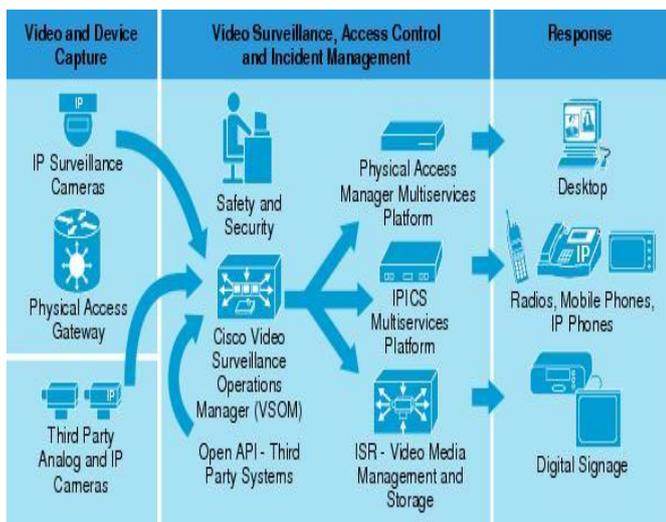


Fig -1: Architecture of video surveillance system

The advantages are high speed video monitoring system and stores the frames and disadvantages would be malfunctions are not handled properly.

In [3] a query algorithm is introduced which will be used to establish the relationship between query and database video by bipartite graph, it construct a sub graph

which matches the max size and it neglects the small one. Here two system are mainly used:

- Video frame Detection
- Video Similarity Search

Deep packet capture (DPC) is the act of capturing complete network packets crossing a network. Here we capture data packets in the scalable network using packet capturing tools. [3]

In [4] Network video capture system using friendly ARM9 board support package (BSP) S3C2440 is presented. This application system captures video, shares among networked systems and also alerts the controlling person with short message service alarm as required by the client. This system works in a real time environment and is supported by embedded RT Linux. This system provides low cost and high effective intelligent monitoring system like in elevators, home security systems etc. with low power consumption. [4]. Here RT Linux is used i.e. Real time operating system and also it can be wired or wireless internet access this could be its advantage. It alerts the person through the Short message service (SMS).

The [5] paper deals with the integrated server and MPEG video [5]. The integrated server means that a specific server is located in the centre of the surveillance system this can get the video information from the network camera and then compress that video and can also store that video for future reference. It can also receive request from the clients like monitoring, controlling etc. The method used in this paper is the open PLANET technology that has been developed by Shikoku Electric Power Company Ltd it has some excellent characteristics, one of which is to transmit digital information from node to node through electric power line. [5]Its advantages include low maintenance, cost effective and mobile operation i.e. it can operated from anywhere and also on the mobile phones or on the desktop as per the user convenience.

The [6] paper elaborates the development process of ov511 USB camera driving in Linux operation system and the MPEG-4 video Coding technology and the network transmission realization of video data transmission. This paper uses ov511 USB camera to capture video and embedded Linux platform which is based on S3C2440 micro controls chip. The processing of the captured video is based on video4linux. Below shows the diagram the Structure of video capturing system. The advantages of this paper will be Rapid video acquisition, Real time transmission well, Stable performance and lower cost.

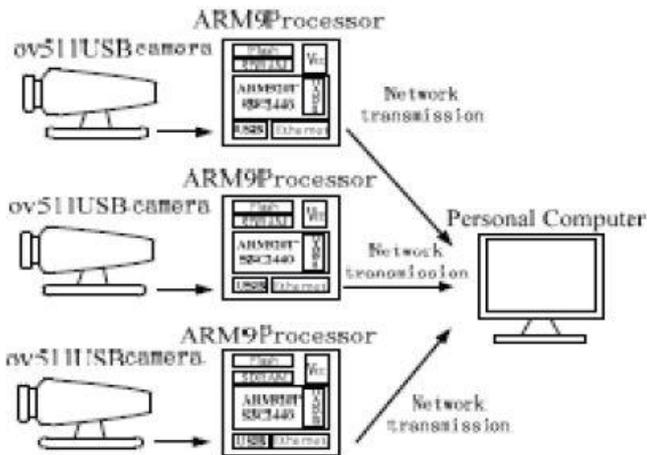


Fig -2: Structure of video capturing system

In [7] here First, USB camera video data are collected by the embedded Linux system, processed, compressed and transferred by the processing chip. Then, video data are sent to the monitor client by wireless network. Here the video is captured by the web camera and the information is processed and the video received is compressed.

In next paper referred in the reference paper idea is to set up a computer terminal equipped with a GSM Modem at banks, which can be used to transmit/receive video/photos and/or commands to and from the administrator/owner. It uses Opencv library to capture camera images and detect intrusion using image comparison technique (Euclidean Distance Method). Once the comparison is done and an intrusion is found, it sends the streamed video from server to remote administrator over android phone. Admin can then take appropriate action and alert local security. [8]

In paper [9] the video captures the motion is detected and SMS is sent. Video4Linux is used here to get the video data then is it transferred to the web server and displayed on the client side. The advantages of includes fewer modules, low cost, higher intelligence, higher stability and higher security. It utilizes the AT commands to give the SMS alarm and can realize remote monitoring. In this when the object is not there the screen shows green color and when the object come and the screen is interrupts with any different object it shows red color on the screen.

3. ARCHITECTURE PROPOSED

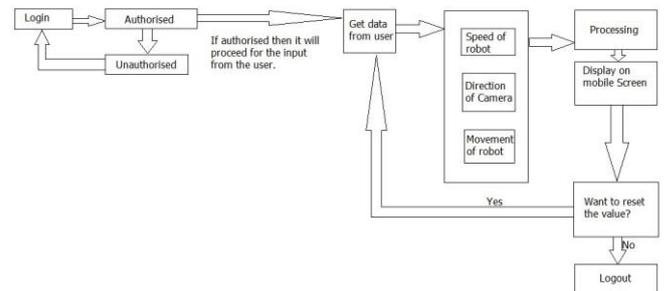


Fig -3: Architecture of System Proposed

First the user will login and the verification will be done on the Linux operating system used, if the user is verified and authorised then will continue further for the input. If the user is not authorised due to wrong password for any other issue then it will be again directed to the login page.

Next the user will input the values in what way the user want to set the value and the robot i.e. the speed of robot, direction of camera and other values, the data will the processed and the output from the camera will be displayed on the screen. The images captured from the camera will be shown on the mobile screen or the desktop wherever the user wants to watch. Then if the user wants to reset the value then it can the reset and again the whole processing is done and whole process is repeated again. The arrow in the flowchart depicted above shows the flow of the system. In this we will be using the video4linux for the video capturing.

Benefits of the proposed system:

- In our system user will be able to view and operate even if he is at remote location i.e. user can operate it remotely.
- In our proposed system the user will have to login first that means a better protection will be provided and no any other person will be able to view the footage other than the authorised and registered people.
- It provides real-time monitoring and hence the appropriate steps can be taken if any problem occurs.
- Our system can the used at various places such as hospitals, shopping malls, college or school premises, in house for keeping any eye on the children or the house objects.
- Since the system is moving it can the capture a wide area and also it can be operated from anywhere if high range network is used.
- It is easy to operate and cost effective and like earlier days one will not be sitting on one place to monitor the video captured.

3. CONCLUSIONS

In the end we conclude that every person want to be in a better and secure world, this survey paper has covered most of the algorithm and the advantages and disadvantages of every paper that has published so far and the work that has done over this project. To provide better security and safety new designs are implemented and also that are cost effective and to make it better further research is going on.in future we can make everything wireless in this project and also better video quality which will be easy to operate and in a way the security information can be carried and viewed anywhere.

ACKNOWLEDGEMENT

We would like to thank our guide Prof. Bharati Kale for supporting and guiding us in our survey.

REFERENCES

- [1] Volume 3, Issue 3, March 2013 ISSN: 2277 128X International Journal of Advanced Research in Computer Science and Software Engineering Research Paper Sixth International Conference on Natural Computation (ICNC 2010) "Network Video Capture and Short Message Service Alarm System Design Based on Embedded Linux" Duanchun ZHOU Guangxing TAN
- [2] Conference on Environmental Science and Information Application Technology-"A Wireless Video Surveillance System based on 3G Network" by Wang Liwei Yan Shi Xu Yiqiu
- [3] International Journal of Research in Computer and Communication technology, IJRCCT, ISSN 2278-5841, Vol 1, Issue 7, December 2012. www.ijrcct.org chiefeditor@ijrcct.org Page 507 "Video Frame Retrieval Using Effective Query Processing" N.Ramya Tulasi, Y Indu
- [4] "ARM9 Based Real Time Embedded Network Video Capture And SMS Alerting system" M.L.V.N.B.S.Kumar, Dr.N.S.Murthi Sarma, Ch.Sridevi, A.Pravin ECE Department, BVC Engineering College Odalarevu(2012)
- [5] International Journal of Emerging Technology and Advanced Engineering Website: www.ijetae.com (ISSN 2250-2459, Volume 2, Issue 8, August 2012) 138 "ARM Based Mobile Phone- Embedded Real-Time Remote Video Surveillance System With Network Camera Krishna Kishore1, B.Chinna Rao2, P.M.Francis3
- [6] International Journal of Innovative Research in Computer and Communication Engineering (An ISO 3297: 2007 Certified Organization)Vol.1, Issue 8, October 2013 "IMPLEMENTATION OF EMBEDDED VIDEO RETRIEVE SYSTEM BASED ON ARM9" V. Jyothi, Prof. M.Srinivas Rao, K.Hanuja
- [7] IOSR Journal of Engineering (IOSRJEN) e-ISSN: 2250-3021, p-ISSN: 2278-8719 Vol. 3, Issue 7 (July. 2013), ||V6||PP 14-1814 | P a g e "Embedded Real Time Video Monitoring System using Arm" by Kavitha Mamindla, Dr.V.Padmaja, CH.NagaDeepa
- [8] "Smart Video Security Surveillance with Mobile Remote Control" by Tasleem Mandrupkar Manisha Kumari Rupali Mane(2014)
- [9] "VIDEO MONITORING AND MOTION DETECTION SYSTEM BASED ON ARM-LINUX PLATFORM AND HTTP PROTOCOL WITH SMS CAPABILITY" *Nava Jeevan Raju, O. and Praveen, P.(2014)