

# PERFORMANCE STUDY OF HIGH RISE BUILDING WITH BRACING AND DIAGRID STRUCTURES UNDER LATERAL LOADS

Abhishek R<sup>1</sup>, Rajeeva S V<sup>2</sup>

<sup>1</sup>P.G. Student, Civil Engineering Department, S J B Institute of Technology, Bengaluru-560060, Karnataka, India

<sup>2</sup>Professor, Civil Engineering Department, S J B Institute of Technology, Bengaluru-560060, Karnataka, India

\*\*\*

**Abstract** - High-rise structures are mostly affected by lateral loads and vulnerable to seismic forces. Earthquake is one of the most devastating natural calamities known to man. Most earthquake related deaths are caused by the collapse of structures. The structural configuration plays a role of paramount importance in reducing the death toll in an earthquake. Numerous researchers have suggested the use of seismic isolation as a method to reduce vibrational damage and to increase seismic sustainability. In this study, the response of various structural configuration regular structure with Bare frame-regular building, diagrid system and bracing system, are evaluated. For the analysis, 30 storey building is considered. The analytical methods used in this dissertation work are equivalent static method and response spectrum method. The seismic parameters for earthquake loads and functions are set as per IS1893-2002. The FEA software ETABS v15 is used for analysis, in this work, various parameters like storey drift, storey displacement, time period, frequency and base shear, are obtained for all the models and have been compared.

**Key Words:** ETABS, Bracing, diagrid, Seismic Forces, Storey displacement, frequency, base shear ....., etc

## 1. INTRODUCTION

As far as now, earthquake is one of the most destructive natural disaster. The death occurs due to earthquake was resulted because of collapse of structures. The different types of configurations are very much importance in death rate. Many researchers have suggested using the proper base isolation systems to reduce the damage happening due to vibrations. Base isolators are very effective for low & medium rise structures. However, for high rise structures, it is not recommended due to its higher over turning moments. The high rise structures are in trend now because of scarcity of land. There is a need to understand the behaviour of dynamic response of the structure. Number of studies has to be carried out to understand the various configuration and their responses during dynamic loads. The main way forward towards the resistant towards earthquake design is to improve the lateral stability of structure. The stability in the form of deformability, ductility capacity and limited damage to the structure with no collapse. The reinforcement detailing is main responsible for the elastic behaviour to avoid any brittle failure. Hence, the primary task of an engineer is to design the structure to withstand for earthquake and exhibit higher ductility to withstand the same. The structure has to withstand for the design period stably.

## 1.1 SEISMIC RESPONSE

Two basic causes due to the earthquake are ground shaking, ground failure, tsunamis, and fire

- Ground shaking this nothing but the vibrations of the ground for which the buildings or structure above the ground responds in varying degree. The accelerations, velocities, and displacements induced due to earthquake cause destruction. There seismic load are not easy to easy to determine due to their random nature.
- Tsunamis these are huge wave which are generated due to shaking of the ocean floor. As they reach towards the land their velocities decrease and their height increases.

## 1.2 DIAGRID

It can be easily recognized by the most of the people, due to its appearance. This system avoids the additional structural elements to support the facades. There by increasing the outside view due to less obstructions. It is an efficient system for architects due to avoiding the interior and corner columns, which will allow the flexibility in the floor space. As a economy consideration, it can save up to 20 percent by weight of structural members when it is compared with conventional frame system. .

## 1.3 BRACING

The main reason for the structure to become more sensitive is due to slenderness of the structure, as the building height increases, the slenderness of the building will drastically increase. This can be over ruled by careful design by providing lateral resisting systems. Which will make the structure stiff, stable and light weight. A bracing system is one such structural system which makes the structure stable under lateral loadings

## 2. LITERATURE REVIEW

[ Narsireddy et al.,2018] in this study five models are considered, one is conventional steel frame and other four are diagrid frames in which diagrid is connecting to one, two, three storeys. All models are of G+ 25 storeys. They are modelled and analyzed in seismic and wind load conditions using ETABS 2013, for seismic analysis zone 4 is considered, wind speed of 44 m/s is considered in wind analysis. The five models are analysed and the parameters like storey

displacement, story drift, time period, axial force, bending moment are compared. Finally, it is concluded that model 3 gives the better results for all above parameter. From the study it is concluded the Diagrid structure is gives better results in seismic and wind analysis than conventional steel structure. The storey displacement is minimum in Diagrid structure as compared to conventional frame. In different seismic and wind load analysis the model 3 gives the better results, in storey displacement, storey drift, bending moment, axial force conditions.

[Tejesh R et al.,2018] In the present study 15 storey steel structure of height 45m (3m each storey) was considered. The structure was designed as per IS 800:2007 code with dead load, live load earthquake load combinations and wind load combinations. Dynamic analysis (response spectra) was performed using ETABS software assuming response reduction factor as 5, importance factor as 1, seismic zone II and type of soil is 2. The analysis was performed according to IS 1893. The analysis was performed for building without bracing, with X bracing and V-bracing. The results were compared and studied. It was found that displacement of the structure was more in the structure without bracing than other models. It was also observed that lateral loads were more in the case of X-bracing. Finally, it can be concluded that X-bracing is better for wind loading and V-bracing is better for earthquake loading,

[Hyun-Su Kim et al.,2018] In the present paper, the diagrid structure is proposed with control devices. A genetic algorithm was proposed by taking an example of 60 storey building. The loads such as wind and earthquake are artificially induced. A system is adopted by using tuned mass dampers with magnetorheological damper. The 5 different objectives are used for the multi-objective genetic algorithm includes a response reduction due to dynamic nature, damping and additional stiffness, capacity of MR damper and mass of STMD. From the proposed technique, an integrated optimal designs of diagrid structure and STMD were obtained. It is found from the numerical method too that the STMD provides good control performance in reducing wind and seismic responses on the structure.

### 3. ANALYSIS

#### 3.1 EQUIVALENT STATIC ANALYSIS

The equivalent static analysis or linear static analysis is bit simple technique, which will substitute to the response spectrum method. In this work, the time period considered will be negligible and forces are applied in a linear format.

The procedure involves:

- The design lateral forces are calculated based on seismic weight and seismic co-efficient method.
- The forces shall be distributed at different levels by standard procedure based on height.

#### 3.2 RESPONSE SPECTRUM ANALYSIS

Response spectrum analysis is a linear dynamic analysis. In the analysis the mode shapes and modal mass participation factors are considered in the analysis and hence it will be treated as practical. All the building or structures will not respond to earthquake out of its frequency of vibration. These frequencies of the structure are called as eigenvalues and the shape of each mode generates which is known as eigenvector. In general, starting 3 modes are important to consider. And as per code it should cover a factor of 90% of modal mass participation.

#### 4. MODELING OF STEEL STRUCTURAL SYSTEM

Modelling of G+29 storey building is considered for the analysis in ETABS software. .

The structure considered here is a regular building with plan dimension of 42m x 42m with a bay length of 6m on both sides. In the present study, a G+29 storeys steel structure with bare frame, bracing system, diagrid system are considered. .

##### 4.1 MATERIAL PROPERTY

The material considered for analysis RC is M-40 grade concrete and Fe-500 grade reinforcing steel:

Young's- Modulus - steel,  $E_s = 2, 10,000$  MPa

Young's - Modulus - concrete,  $E_C = 31622.7$  MPa

Characteristic strength of concrete,  $f_{ck} = 40$  MPa

Yield stress for steel,  $f_y = 500$  MPa

Table.3.1 Specification of models

Member	Specification
Beam	ISMB500
Column	Built up ISHB 450
Bracings	ISMB150

The above sections are assigned based on economical design depending on height of the building

##### 4.2 MODEL GEOMETRY

The Building is 30-storied, seven bays along X-dir. and seven bays along Y- dir., Steel frame with properties as specified below. The floors are modelled as rigid deck slab section. The details of the model are given as follows:

Number of stories = 30

Number of bays along X Dir. = 7 Bay, Y-Dir. = 7 Bay

Storey height = 3.0 meters at Ground Floor,

Remaining Floors.

Bay width along X Dir.= 6 m, Y Dir. = 6 m.

### 5. TYPES OF MODELS FOR ANALYSIS

In the present work five models were considered and analysed they are viz.

Model - 1- Bare frame - regular building

Model - 2- Diagrid system.

Model - 4 - Bracing System.

#### 5.1 MODELING

Figure .1 indicates the plan of the symmetrical structure. The figure.2 shows the elevation of the model

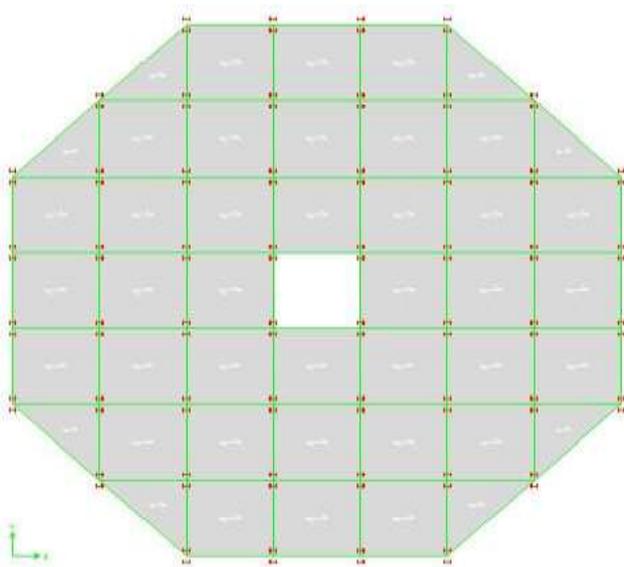


Fig. 1 Plan of the buildings

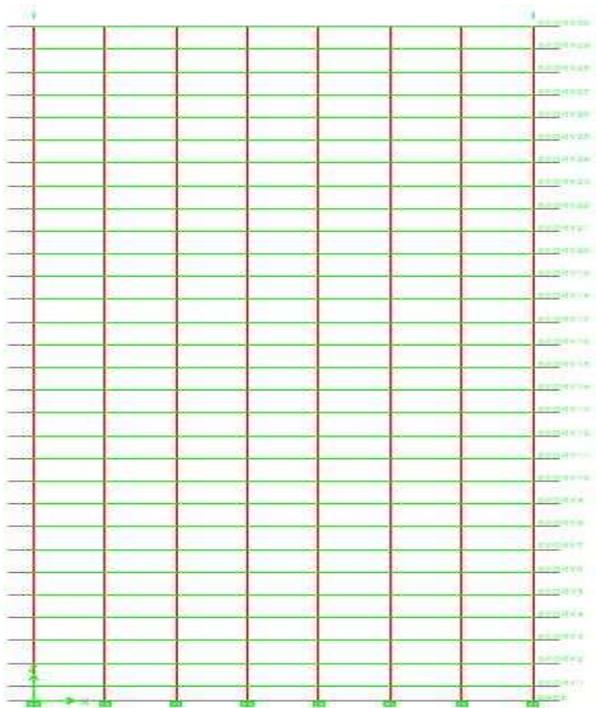


Fig. 2 Elevation View

### 6. RESULTS

This chapter describes the results and discussion of the models analyzed in ETABS by linear analysis

#### 6.1 STOREY DISPLACEMENT

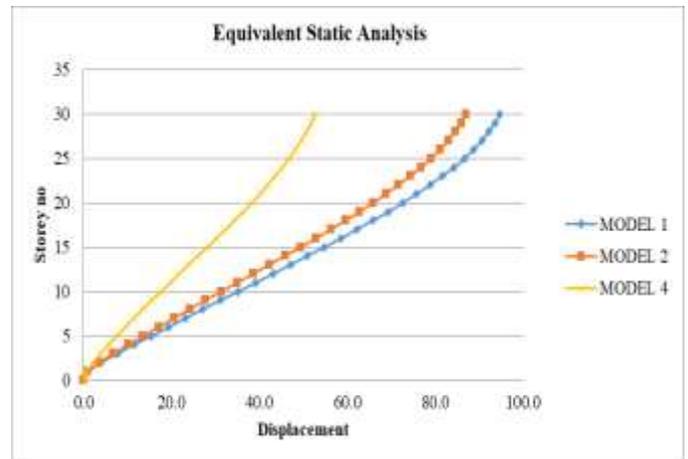


Fig. 3 Comparison of story v/s displacement for 30 storey different models in x-direction

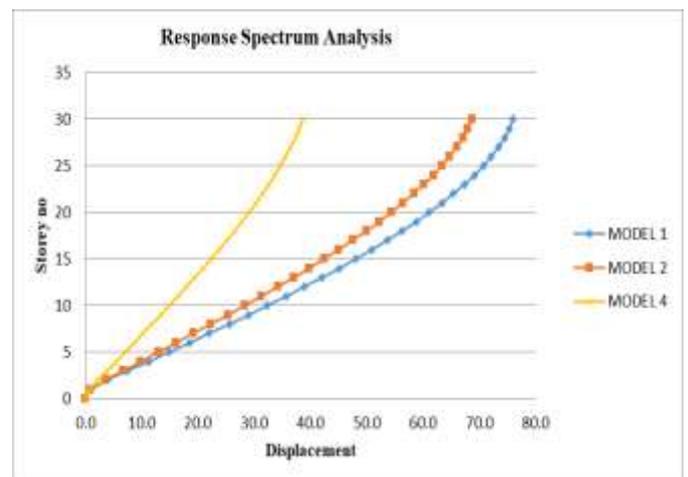


Fig. 4 Comparison of story v/s displacement for 30 storey different models in x-direction

The displacement in the conventional building seems to be high compared to all other structures. This is due to lack of stiffness or capability to resist lateral loads. However, the diagrid structure (module 4) is the stiffer compared to all other models and is very much significant in terms of displacement. The model 1, and model 2 are having displacement with minimal variations

### 6.2 STOREY DRIFT

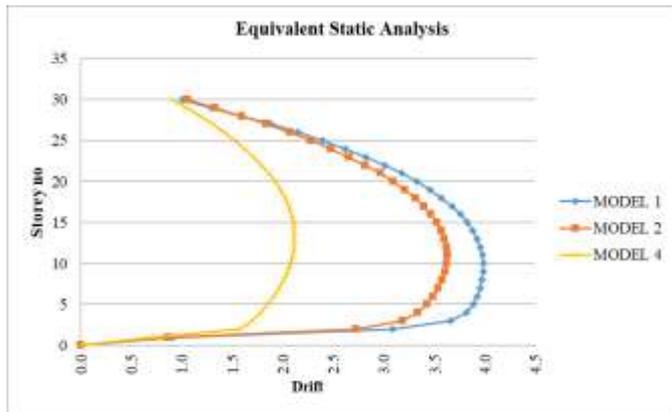


Fig. 5 Comparison of storey v/s storey drifts for 30 story different models in x-direction

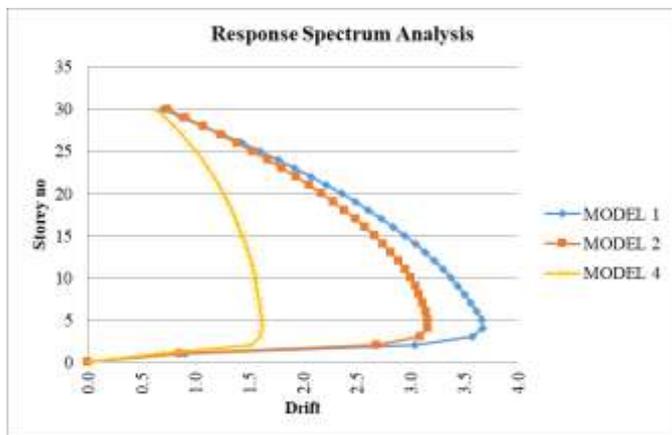


Fig. 6 Comparison of storey v/s storey drifts for 30 story different models in x-direction

The drift values are the difference in the displacement values. From the graphs, it is clear that the drift values are significantly less in the diagrid structure (module 4), the smooth variations are found in the model 1 and module 2.

### 6.3 TIME PERIOD

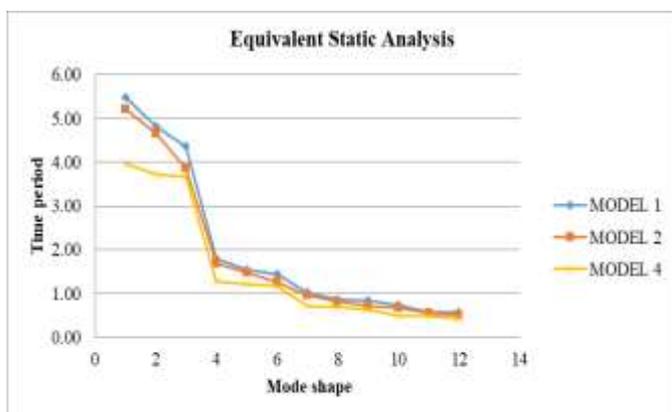


Fig. 7 Comparison of mode numbers v/s time period for 30 storey different models

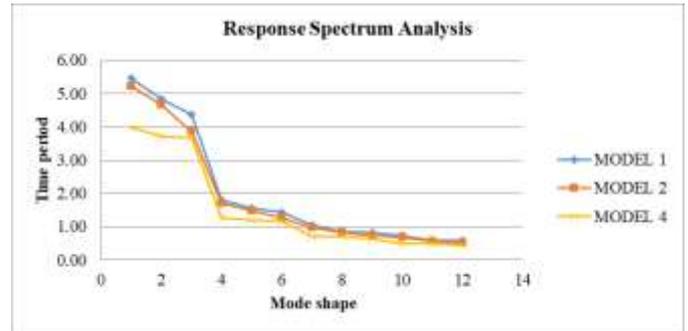


Fig. 8 Comparison of mode numbers v/s time period for 30 storey different models

Regular conventional model is having higher time period and hence the higher flexibility. The flexibility of the diagrid structure (module 4) reduced in the time period due to lesser time period. The time period of models 1 and model 2 are almost same due to same flexibility.

### 6.4 FREQUENCY

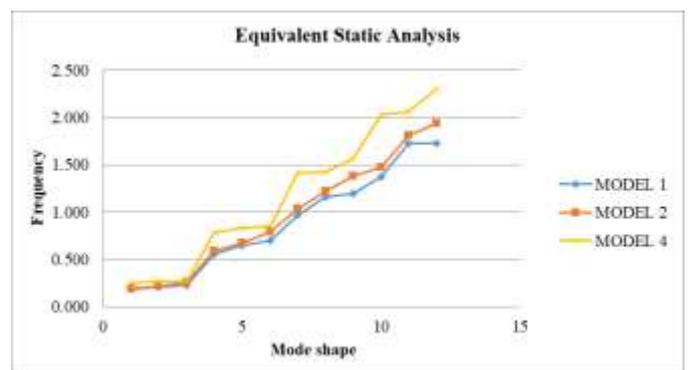


Fig. 9 Comparison of mode numbers v/s frequency for 30 storey different models

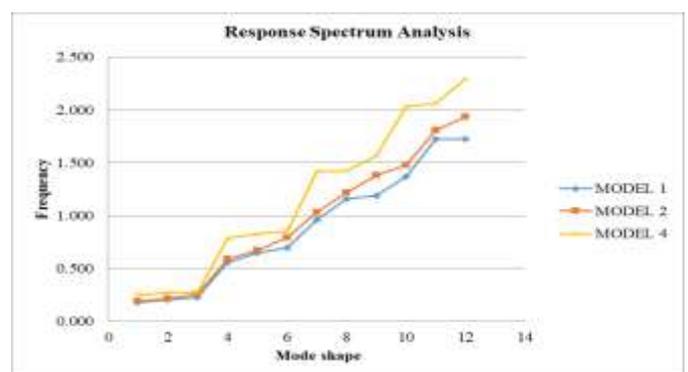


Fig.10 Comparison of mode numbers v/s frequency for 30 storey different models

Since, the frequency is inversely dependent on the time period, the values are in line with time period values. However, the frequency will be more for diagrid model when compared to other models. The Regular model is having lesser frequency because of longer time period.

## 7. CONCLUSIONS

In this study, models regular building (G+29) stories with bare frame system, bracing system, outrigger system, and bracing with outrigger system, is modelled and analyzed for static method and dynamic methods (linear). The structure is analyzed to study the behavior of the building for lateral loads. It is done using FEM software ETABS.

The following conclusions are being made by the results obtained from the present study:

1. The displacement of model1, conventional structure is having higher displacement compared with braced model and diagrid model. The diagrid structure is the stiffer compared to all other models and is very much significant in terms of displacement. The model 1 and model 2 are having displacement with minimal variations.
2. The drift values are in concurrence with the displacement values, however the difference in terms of percentage values will remain same.
3. The time period of the structure depends on its flexibility. From the results regular conventional building is having greater flexibility than other models. The diagrid model shows lesser time period due to its brittle behaviour. It is almost 50% reduction in comparison
4. There is no much difference in the base shear values between the models. Since all the models process similar load and height, the base shear parameter is not a matter of considerations.
5. The difference between equivalent static and response spectrum analysis is noticed from the results. It is found that, Equivalent static giving higher displacement values than Response spectrum. However, the time period and base shear values will be not varying for different analysis.
6. The time period and base shear values will not vary for the type of analysis. Since it is depending on the building geometry and its dynamics.

## REFERENCES

- 1) Karthik A L, Geetha K "Dynamic Analysis Of Bundled Tube Steel Structure With Belt-Truss And Mega Bracings" International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 - 0056 Volume: 03 Issue: 07 | July-2016
- 2) NarsiReddy, Vinayak Vijapur, Some Comparative Study on Steel Diagrid Structure with Conventional Steel Structure, "International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 - 0056 Volume: 05 Issue: 07 | July-2018
- 3) Nishith B. Panchal and Vinubhai R. Patel "Diagrid structural system: strategies to reduce lateral forces on high rise buildings" International Journal of

Research in Engineering and Technology Vol:3 Issue:4, 2014

- 4) Hyun-Su Kim, Joo-Won Kang, Hoga-Based Structure Design Method for Diagrid Structure Control System Subjected to Wind and Earthquake Load ,International Journal of Steel Structure ,Volume-18, Issue-5, Dec-2018
- 5) Tejesh. R, Ummer Farooq Pasha, Latrral Stability of High Rise Steel Building using ETABS "International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395 -0056 Volume: 05 Issue: 01 | July-2018, Page no(607-611)
- 6) IS 1893 (Part1): 2002, "Criteria for Earthquake Resistant Design of Structures", Part 1 General Provisions and Buildings, Fifth Edition, Bureau of Indian Standards.

## BIOGRAPHIES



Mr. Abhishek R1, PG Student, MTech, CAD Structures, at SJB Institute of Technology, Bengaluru.



Dr. Rajeeva S V2, presently working as an Engineering, SJBIT, Bengaluru. He has total teaching experience of 35 years. He obtained M. Tech from NITK, Surathkal and Ph.D. from IIT, Madras with a specialization in Structural Engineering. He has guided 51 M. Tech and 2 Ph.D. thesis. He is a member of ACCE, IIBE, ICI, IE, ISET, ISTE.