

Home Energy Management System with Automated Power Scheduling using GSM

Suresh Kumar.V

Assistant Professor, Dept. of EIE, Valliammai Engineering college, Chennai, Tamilnadu, India

Abstract - Energy saving has become one of the most important issue nowadays. The most the inefficient use of the consumer electronics causes wastage of energy. Energy demands are increasing constantly. The availability of electrical energy is also serious issue since demand is greater than generation. One way to meet those electricity energy demands is use of energy management systems to monitor and effectively manage major loads in response to demand and generation programs. This paper presents application of GSM-SMS technology. This monitoring system consist of a new energy calculation algorithm, offering electricity packages with an intelligent monitoring system for daily power consumption connected to base-station via GSM network. Various data can be then fed and integrated into existing energy management systems located at power companies or organizations to provide the services without man-power. Energy Management System leads to savings in the overall cost. An Energy Management Controller (EMC), is used which checks electricity consumption and generation and remotely manages the modes. Whenever the power generation is reduced, electricity board will change the mode from full power to custom mode by sending a command message to the controller. The EMC contains a GSM modem, a microcontroller, and a relay circuit (GSM), which is connected to the load. Power is equally shared here to provide uninterrupted power supply.

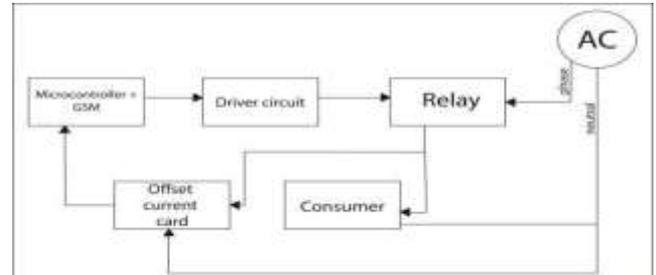


Fig -1: Block Diagram

This monitoring system consist of a new energy calculation algorithm, offering electricity packages with an intelligent monitoring system for daily power consumption connected to base-station via GSM network. The proposed energy meter system when incorporated with embedded controller and GSM modem can be used to transmit the data like consumed energy in kWh, generated bill, security services (line Cut/On) over GSM mobile network. Such a data can be then fed and integrated into existing energy management systems located at power companies or organizations to provide the services among the customers without man-power.

Energy Management System leads to savings in the overall cost. These savings may be come from better utilization of manpower, servicing cost, savings in the energy consumption, and non-breakdowns in the system. An Energy Management Controller (EMC), is used which checks electricity consumption and generation and remotely manages the load. Whenever utility company sends a command for load shedding, low priority appliances are cut off from power supply to reduce peak demand. The priority of the appliances can be set by the user through an easy interface to the EMC. The EMC contains a smart energy meter, a GSM modem, a microcontroller, and a relay circuit (GSM), which is connected between the energy meter and the load. They are three control modes full, custom, and limited mode. These modes are operated based on the power generated. The proposed power scheduler is so designed that power is shared equally between all loads.

Key Words: Demand response, Energy management, GSM, Power scheduling, Power sharing, Smart grid

1. INTRODUCTION

Electricity is one of the most popular forms of energy used in the modern society. Nowadays, electricity energy demands are increasing constantly. The availability electrical energy is also serious issue. Demand of electricity is greater than that of generation of electricity. The difference between increasing demand and installation capacity appeals the researchers design a system that help to reduce this threatening rise in peak. One way to meet those electricity energy demands is use of energy management systems to monitor and effectively manage major loads in response to demand and generation. This paper presents application of GSM-SMS technology for real time data acquisition. The application is based on a field data collection prototype system that is composed of field monitoring and host side control platforms.

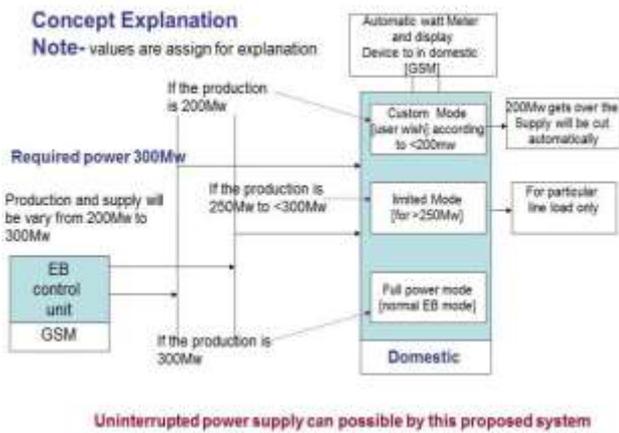


Fig -2: Proposed System

2. OPERATING PRINCIPLE

In India, there is a large difference between the peak demand and available electrical energy. But what will happen if available energy is used without load shedding. In this system, the available electrical energy is distributed equally to each consumer. Consider 1 MW of energy is generated and consumers are 1000. Then this energy is equally distributed or as per requirement. This required value of energy is set through GSM module. If this energy is distributed equally then each consumer can utilize energy up to 1000 Watt. If consumer exceeds the consumption value 1000 Watt then offset current card gives signal to the microcontroller and microcontroller activates the relay, which results in cut off power supply of that consumer. This system can be implanted into available Energy meter. The amplifier circuit is used to protect the control system form excessive current. There are three modes of operation full, custom, and limited. In full mode, the allocated power can be utilized fully as the consumer wish. Also, the any type of load can be used. Whereas in custom mode, the power allocated is less than the full mode allocation and here also any type of load can be operated. But the consumer runs the risk of being cut off if the consumer uses the power allocated to him. In limited mode, the power allocated is below the half of power allocated in full mode. The consumer is allowed to run the loads that are prescribed by the power generation board. By this, efficient use of power can be implemented and load shedding situation can be avoided.

2.1. GSM Module

The main use of the GSM module is that there should not be restriction of distance. The GSM circuit is connected to the microcontroller. Just plug this module onto your microcontroller board, plug in a SIM card from an operator offering GPRS coverage and follow a few simple instructions to start controlling your world through the internet. It is also possible to make voice call and send as well as receive SMS by using the GSM module. The GSM network is divided into three major systems: The Switching

System(SS), the Base Station System(BSS), and the operation and support system(OSS).

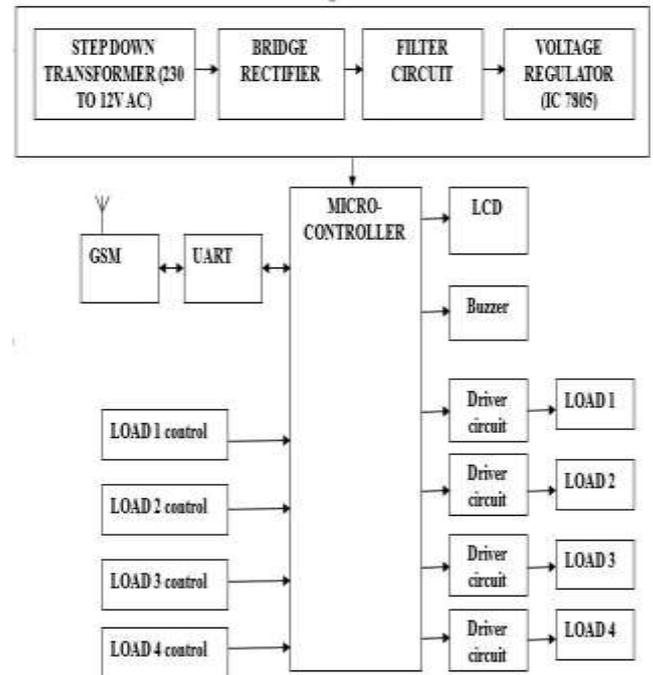


Fig -3: GSM Module

2.2. Offset current conditioning card and Microcontroller

The offset data conditioning card clamp the A.C. with reference to the applied D.C.voltage. The value of reference D.C voltage set according to the maximum load ratings. The offset data conditioning card consist of two operational amplifiers, UA741CN which are operated in inverting mode. The first op-amp is used as summing amplifier. It adds up the input signal with the DC reference voltage. The output of the first op-amp is inverted using the second op amp which acts as an inverting amplifier. The output of this op amp is taken out as the output of the offset data conditioning card. Here the +12V is connected to current offset conditioning card to its proper action. The current offset conditioning card sent energy consumed by consumer to microcontroller. By comparing this values microcontroller decides to cut off or not the power supply.

2.3. Software Implementation

A microcontroller with USB is connected to computers and it is also possible to external electronic circuit, such as motors, relays, various sensors, diodes, microphones, and loudspeakers etc. The microcontroller used here is AT89S52. The microcontroller can be powered using 5V D.C. A battery or supply can be provided through USB connected to computer. The microcontroller is firstly programmed using computer through keil compiler and after disconnection it can work independently. The software has standard programming language compiler and it also contains boot loader that runs on the microcontroller board.

2.4. Information of driver circuit

The driver circuit used here is ULN 2003. The signal from the microcontroller is given to the driver circuit. It consists of seven NPN Darlington pair transistors. When signal is applied to the base of the transistor current flows from collector to emitter and supply is given to loads through relay. Driver circuit is used to protect the control system from damages. This control system contains transistor connected in common emitter voltage divider biasing mode, because if common emitter gain is nearly equals to 100 and voltage divider biasing provides the high stabilization.

3. CONCLUSIONS

The offset current conditioning card gives the energy consumed by consumer after 10 minutes to microcontroller. Microcontrollers sense this value; here this value is less than programmed value means less than 30 Watt. The relay will not activate and power of that consumer remains continue. Programmed value is 30 Watt. The consumer starts to consume the electricity. If consumer exceeds 30 watts then relay get activated and power supply of that consumer get cut off.

REFERENCES

- [1] Rajesh V. Sakhare, and B. T. Deshmukh, "Wireless Effective Energy Management by Using ZigBee," International Journal of Engineering Research & Technology (IJERT), vol. 1, no. 7, September 2012.
- [2] Chia-Hung Lien, Ying-Wen Bai, Hsien-Chung Chen, and Chi-Huang Hung, "Home appliance energy monitoring and controlling based on Power Line Communication," International Conference on Consumer Electronics, Jan. 2009, pp. 1-2.
- [3] J. Byun, I. Hong, and S. Park, "Intelligent cloud home energy management system using household appliance priority based scheduling based on prediction of renewable energy capability," IEEE Trans. Consum. Electron, vol. 58, no. 4, pp. 1194–1201, Nov. 2012.
- [4] J. Han, C. S. Choi, and I. Lee, "More efficient home energy management system based on ZigBee communication and infrared remote controls," IEEE Trans. Consum. Electron, vol. 57, no. 1, pp. 85–89, Feb. 2011.
- [5] M. Kuzlu, M. Pipattanasomporn, and S. Rahman, "Hardware demonstration of a home energy management system for demand response applications," IEEE Trans. Smart Grid, vol. 3, no. 4, pp. 1704–1711, Dec. 2012.
- [6] M. Pipattanasomporn, M. Kuzlu, and S. Rahman, "An algorithm for intelligent home energy management and demand response analysis," IEEE Trans. Smart Grid, vol. 3, no. 4, pp. 2166–2173, Dec. 2012.
- [7] Yu-Ping Tsou, Jun-Wei Hsieh, Cheng-Ting Lin, Chun-Yu Chen, "Building a Remote Supervisory Control Network System for Smart Home Applications," 2006 IEEE International Conference .