

EFFECT OF SETBACK ON FUNDAMENTAL PERIOD OF RC FRAMED BUILDINGS

Vivek Singh Thakur¹, Rohit Rai²

¹Post Graduate Student, Structural Engineering, Maharshi University of Information Technology, Lucknow, Uttar Pradesh, India

²Assistant Professor, Dept. of Civil Engg. Maharshi University of Information Technology, Lucknow, Uttar Pradesh, India

Abstract - During earthquake, the motion of the ground does not harm the building by any external force, but it is building large-scale internal roots in the building which is due to the vibration of the building's mass. Due to earthquake, the magnitude of the lateral force depends mainly on the root mass, ground acceleration and dynamic characteristics of the building. To represent ground motion and structural behavior, design codes provide a response spectrum. Response spectrum easily describes the top reactions of the structure as a function of natural vibration duration. Therefore, it is necessary to study the natural vibration period of the building to understand the seismic reaction of the building. The behavior of the multi-storey building depends on the distribution of mass, hardness and power in the horizontal and vertical planes of the building during strong earthquake speeds. In multi-storey buildings, the damage caused by the earthquake motion of the earth usually starts at places of structural vulnerability present in the lateral load-resistant frame. In some cases, these weaknesses can be made by imbalance between hardness, strength or mass in the adjacent floor. Such imbalances between floors are often associated with sudden variation with height in frame geometry. Due to such vertical discontent, there are many examples of the failure of buildings in the previous earthquake. A common type of vertical geometric irregularity in building structures is due to a sudden reduction in the sudden level of lateral level of the building. This building category is known as the construction of the shock.

This study shows that it is difficult to measure irregularity in the formation of a shock with a single parameter. Also, this study indicates that there is a very poor connection between the three dimensional buildings with the final dimensional or design code used to define the setback unregulated with the original dimension. Design code geometry is not the only way to define setback irregularity. The period of shock buildings is always less than the same regular building. The basic period of the finished building without any hard building depends only on the height of the building, but also depends on bay width, irregularity and other structural and geometric standards. It is not advisable to associate the origin of the framed building with the height given in the design code only.

Key Words: Geometric irregularity, Setback building, Fundamental period, Regularity index, Correction factor.

1. INTRODUCTION

1.1 Background and Motivation

Due to earthquake, the magnitude of the lateral force depends mainly on the root mass, ground acceleration and dynamic characteristics of the building. To represent ground motion and structural behavior, design codes provide a response spectrum. The reaction spectrum easily describes the top reactions of the structure in the form of a natural vibration duration, moisture ratio and founder soil type. It is necessary to determine the fundamental duration of the structures for earthquake design and evaluation. Seismic analysis of most structures is done using linear static (linear) static and linear dynamic (reaction spectrum) methods. The lateral power calculated according to the equivalent static method depends on the structural mass and the basic structure of the structure. The empirical equation of the fundamental period of the buildings given in the design code is the work of height and base dimensions of buildings. Theoretically the reaction spectrum method uses model analysis to calculate the natural period of the building, calculate the base shear. However, some international codes (such as IS 1893: 2002 and ASCE 7: 2010), according to the original duration, specify the base shear (and other reaction quantities) according to specific empirical sources, improvements for spectrum for feedback Analysis, make this base shear (or any other reaction volume) equal to equivalent static analysis. Therefore, using the code empirical formula, valuation of the original period is necessary for the seismic design of buildings.

Inclination in buildings introduces the decrease in sudden decrease in the floor area with the height of the building. Due to its functional and beauty architecture, this building is becoming increasingly popular in building multi-storey building. Specifically, this type of shock provides sufficient daylight and ventilation for lower floors in urban areas, where there is close proximity to long buildings. These shocks affect the center of the hardness of mass, strength, hardness, center of mass and construction of shocks. Due to the change in geometrical and structural properties, the dynamic properties of such buildings are different from the regular building. Design codes are not clear about the definition of height construction for calculating the

fundamental period. The waste version of the height in the Setback Building makes it difficult to calculate the natural period of such buildings. With this background, it is necessary to study the effects of shock on the fundamental period of buildings. Apart from this, the performance of empirical equation given in Indian standard IS 1893: 2002 is a matter of concern for structural engineers to assess the fundamental period of tall buildings. This is the primary motivation under the current study.

2. STRUCTURAL MODELLING

In this thesis, the study is based on the analysis of the family of structural models, which represents the vertical irregular multi-storey shock. The first part of this chapter summarizes the various parameters defining building geometry to consider computational models, basic assumptions, and this study. All selected buildings were designed according to Indian standards.

In the second half of this chapter, brief details of the design process have been presented in the present study. Free vibration analysis procedures of the building system to be considered in the study explained briefly at the end of the chapter

2.1 Computational Model

odeling a building involves the modeling and assembly of various load-carrying elements in modeling. Models should ideally represent large-scale distribution, strength, rigidity and distortion. The modeling of physical properties and structural elements used in the current study is discussed below.

2.2 Material Properties

Concrete M-20 grade and F-415 grade reinforced steel are used for all frames models used in this study. The elastic physical properties of these materials are taken according to Indian Standard IS 456 (2000). Short-term modulus of concrete elasticity (E_c) is taken as:

$$5000 \sqrt{f_{ck}} \quad (2.1)$$

Where f_{ck} characteristic compressive strength of concrete cube in MPa at 28-day (20 MPa in this case). For the steel rebar, yield stress (f_y) and modulus of elasticity (E_s) is taken as per IS 456 (2000).

2.3 Structural Elements

Beams and columns are modeled by 2D frame elements. Beam-column joints are modeled by giving an end-offset to the frame elements to get the moments and forces of beam and column bending over the face. Beam-column joints are

considered rigid (Fig.1). The column end in the foundation was decided for all models of this study.

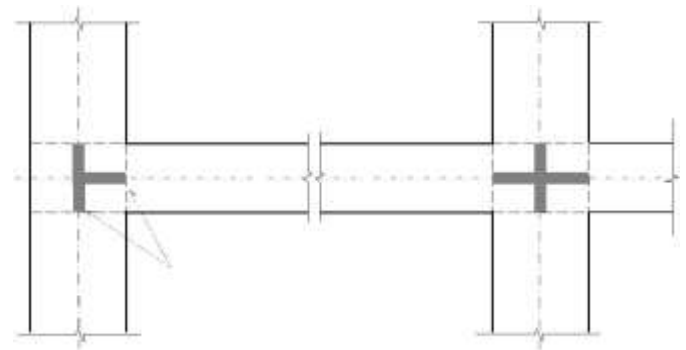


Fig -1: Use of end offsets at beam-column joint

Due to its in-plane rigidity, the structural effect of the slab is kept in mind by assigning the 'diaphragm' action at each floor level. The mass / weight contribute on of the slab is modeled separately on the assistive beam.

2.4 Linear Dynamic Analysis

Symmetrical buildings with equal mass and hardness distribution are treated fairly, whereas such buildings which are asymmetric or are not in the areas of disruption or irregularity. For such buildings, dynamic analysis is used to determine important feedback characteristics such as

- (1) The effect of the dynamic characteristics of the structure on the vertical distribution of lateral powers.
- (2) Increase in dynamic load due to Torsion speed.
- (3) The effect of high mode, resulting in the shear and distortion of the story.

3. FUNDAMENTAL TIME PERIOD FOR SETBACK BUILDINGS

The original time period of all 90 selected setback buildings was calculated using different methods available in literature, including literature-based empirical sources. The fundamental period of these buildings was also calculated using model analysis.

All selected shocks obtained from different methods available in the literature are tabulated in the original period 4.1 - 4.3 for the buildings. Table 4.1 presents the results of the buildings with 5 meters bay width, Table 4.2 presents the results of buildings with 6 meter bay width, while Table 4.3 presents the results of buildings with 7 meter bay width. The original period presented here is calculated according to the various codes of empirical equations, including the IL-1893: 2002 (Eq 2.6), UBC 94 (Eq 2.7), ASCE 7 (Access 2.8 and 2.9), along with Rayleigh Method (empirical equations is performed. (Eq 2.10), and the period derived from model analysis.

Table -1: Fundamental period (s) of setback buildings with 5 m bay width

Building Designation	Height	T _{IS 1893}	T _{UBC.94}	T _{ASCE.7}	T _{ASCE.7}	T _{Rayleigh}	T _{Modal}
R-6-5	18	0.66	0.64	0.63	0.60	1.1	1.17
S1-6-5	18	0.66	0.64	0.63	0.60	1.02	1.05
S2-6-5	18	0.66	0.64	0.63	0.60	1.02	1.09
S3-6-5	18	0.66	0.64	0.63	0.60	0.9	0.95
S4-6-5	18	0.66	0.64	0.63	0.60	0.93	0.97
S5-6-5	18	0.66	0.64	0.63	0.60	0.94	1.01
R-12-5	36	1.10	1.07	1.17	1.20	1.32	1.49
S1-12-5	36	1.10	1.07	1.17	1.20	1.21	1.37
S2-12-5	36	1.10	1.07	1.17	1.20	1.29	1.4
S3-12-5	36	1.10	1.07	1.17	1.20	1.09	1.24
S4-12-5	36	1.10	1.07	1.17	1.20	1.11	1.24
S5-12-5	36	1.10	1.07	1.17	1.20	1.21	1.40
R-18-5	54	1.49	1.46	1.69	1.80	1.89	2.18
S1-18-5	54	1.49	1.46	1.69	1.80	1.73	2.00
S2-18-5	54	1.49	1.46	1.69	1.80	1.86	2.08
S3-18-5	54	1.49	1.46	1.69	1.80	1.73	1.84
S4-18-5	54	1.49	1.46	1.69	1.80	1.70	1.82
S5-18-5	54	1.49	1.69	1.69	1.80	1.95	2.16
R-24-5	72	1.85	1.81	2.19	2.40	2.04	2.44
S1-24-5	72	1.85	1.81	2.19	2.40	1.98	2.19
S2-24-5	72	1.85	1.81	2.19	2.40	2.10	2.43
S3-24-5	72	1.85	1.81	2.19	2.40	1.95	2.16
S4-24-5	72	1.85	1.81	2.19	2.40	1.89	2.09
S5-24-5	72	1.85	1.81	2.19	2.40	2.19	2.72
R-30-5	90	2.19	2.14	2.67	3.00	2.57	3.18
S1-30-5	90	2.19	2.14	2.67	3.00	2.34	2.89
S2-30-5	90	2.19	2.14	2.67	3.00	2.51	3.12
S3-30-5	90	2.19	2.14	2.67	3.00	2.20	2.76
S4-30-5	90	2.19	2.14	2.67	3.00	2.12	2.63
S5-30-5	90	2.29	2.14	2.67	3.00	2.8	3.55

Table -2: Fundamental period (s) of setback buildings with 6 m bay width

Building Designation	Height	T _{IS 1893}	T _{UBC.94}	T _{ASCE.7}	T _{ASCE.7}	T _{Rayleigh}	T _{Modal}
R-6-6	18	0.66	0.64	0.63	0.60	1.30	1.37
S1-6-6	18	0.66	0.64	0.63	0.60	1.20	1.23
S2-6-6	18	0.66	0.64	0.63	0.60	1.19	1.28
S3-6-6	18	0.66	0.64	0.63	0.60	1.06	1.11
S4-6-6	18	0.66	0.64	0.63	0.60	1.09	1.13
S5-6-6	18	0.66	0.64	0.63	0.60	1.09	1.17
R-12-6	36	1.10	1.07	1.17	1.20	1.53	1.72
S1-12-6	36	1.10	1.07	1.17	1.20	1.4	1.57
S2-12-6	36	1.10	1.07	1.17	1.20	1.42	1.60
S3-12-6	36	1.10	1.07	1.17	1.20	1.25	1.41
S4-12-6	36	1.10	1.07	1.17	1.20	1.28	1.42
S5-12-6	36	1.10	1.07	1.17	1.20	1.36	1.56
R-18-6	54	1.49	1.46	1.69	1.80	2.18	2.45
S1-18-6	54	1.49	1.46	1.69	1.80	2.00	2.28
S2-18-6	54	1.49	1.46	1.69	1.80	2.05	2.35
S3-18-6	54	1.49	1.46	1.69	1.80	1.80	2.08
S4-18-6	54	1.49	1.46	1.69	1.80	1.81	2.06
S5-18-6	54	1.49	1.69	1.69	1.80	2.02	2.37
R-24-6	72	1.85	1.81	2.19	2.40	2.27	2.68
S1-24-6	72	1.85	1.81	2.19	2.40	2.15	2.52
S2-24-6	72	1.85	1.81	2.19	2.40	2.23	2.65
S3-24-6	72	1.85	1.81	2.19	2.40	1.97	2.35
S4-24-6	72	1.85	1.81	2.19	2.40	2.13	2.30
S5-24-6	72	1.85	1.81	2.19	2.40	2.25	2.84
R-30-6	90	2.19	2.14	2.67	3.00	2.82	3.45
S1-30-6	90	2.19	2.14	2.67	3.00	2.57	3.19
S2-30-6	90	2.19	2.14	2.67	3.00	2.71	3.32
S3-30-6	90	2.19	2.14	2.67	3.00	2.37	2.94
S4-30-6	90	2.19	2.14	2.67	3.00	2.35	2.84
S5-30-6	90	2.29	2.14	2.67	3.00	2.80	3.64

Table -3: Fundamental period (s) of setback buildings with 7 m bay width

Building Designation	Height	T _{IS 1893}	T _{UBC.94}	T _{ASCE.7}	T _{ASCE.7}	T _{Rayleigh}	T _{Modal}
R-6-7	18	0.66	0.64	0.63	0.60	1.50	1.58
S1-6-7	18	0.66	0.64	0.63	0.60	1.35	1.42
S2-6-7	18	0.66	0.64	0.63	0.60	1.38	1.47
S3-6-7	18	0.66	0.64	0.63	0.60	1.20	1.28
S4-6-7	18	0.66	0.64	0.63	0.60	1.26	1.30
S5-6-7	18	0.66	0.64	0.63	0.60	1.23	1.35
R-12-7	36	1.10	1.07	1.17	1.20	1.76	1.95
S1-12-7	36	1.10	1.07	1.17	1.20	1.61	1.78
S2-12-7	36	1.10	1.07	1.17	1.20	1.62	1.81
S3-12-7	36	1.10	1.07	1.17	1.20	1.53	1.59
S4-12-7	36	1.10	1.07	1.17	1.20	1.46	1.61
S5-12-7	36	1.10	1.07	1.17	1.20	1.53	1.74
R-18-7	54	1.49	1.46	1.69	1.80	2.49	2.73
S1-18-7	54	1.49	1.46	1.69	1.80	2.28	2.58
S2-18-7	54	1.49	1.46	1.69	1.80	2.33	2.65
S3-18-7	54	1.49	1.46	1.69	1.80	2.05	2.35
S4-18-7	54	1.49	1.46	1.69	1.80	2.06	2.33
S5-18-7	54	1.49	1.69	1.69	1.80	2.25	2.62
R-24-7	72	1.85	1.81	2.19	2.40	2.55	2.97
S1-24-7	72	1.85	1.81	2.19	2.40	2.40	2.80
S2-24-7	72	1.85	1.81	2.19	2.40	2.48	2.91
S3-24-7	72	1.85	1.81	2.19	2.40	2.18	2.57
S4-24-7	72	1.85	1.81	2.19	2.40	2.39	2.54
S5-24-7	72	1.85	1.81	2.19	2.40	2.43	3.02
R-30-7	90	2.19	2.14	2.67	3.00	3.11	3.78
S1-30-7	90	2.19	2.14	2.67	3.00	2.84	3.44
S2-30-7	90	2.19	2.14	2.67	3.00	2.96	3.58
S3-30-7	90	2.19	2.14	2.67	3.00	2.60	3.17
S4-30-7	90	2.19	2.14	2.67	3.00	2.57	3.21
S5-30-7	90	2.29	2.14	2.67	3.00	3.06	3.74

Figures presented in Tables 1 - 3 are shown graphically in to better understand the results. The fundamental period of 6 to 30 story shock buildings has been made against the number of stories. IS 1893: 2002 presents comparative comparison of the shock buildings received from the equation. This figure shows that the code gives empirical formula model analysis and lower level of fundamental period obtained from Raleigh method. Therefore, it can be concluded that the code (IS 1893: 2002) always conveys conservative estimates of the fundamental period of shocks

with 6 to 30 floors. It can also be seen that the Raleigh method sets back reduces the original period of the buildings, which is also conservative for the selected buildings.

The amount of irregularity in the selected buildings is calculated according to the available literature as well as the definition given in the international design code and tables are presented in 4.4 - 4.6.

Table -4: Characteristics of setback buildings with 5 m bay width

Building Designation	Height (m)	T _{Modal}	A/L (IS 1893)	L ₁ /L ₁ (ASCE 7)	Karavasilis et.al.2008		(Sarkar et.al.2010)
					S	b	
R-6-5	18	1.17	0.00	1.00	1.00	1.00	1.00
S1-6-5	18	1.05	0.33	1.50	1.25	1.25	0.75
S2-6-5	18	1.09	0.33	1.50	1.25	2.00	0.70
S3-6-5	18	0.95	0.66	2.00	1.75	1.75	0.65
S4-6-5	18	0.97	0.66	3.00	2.00	1.25	0.72
S5-6-5	18	1.01	0.66	3.00	2.00	2.00	0.55
R-12-5	36	1.49	0.00	1.00	1.00	1.00	1.00
S1-12-5	36	1.37	0.33	1.50	1.10	1.25	0.94
S2-12-5	36	1.4	0.33	1.50	1.10	2.00	0.85
S3-12-5	36	1.24	0.66	2.00	1.30	1.75	0.79
S4-12-5	36	1.24	0.66	3.00	1.40	1.25	0.88
S5-12-5	36	1.40	0.66	3.00	1.40	2.00	0.65
R-18-5	54	2.18	0.00	1.00	1.00	1.00	1.00
S1-18-5	54	2.00	0.33	1.50	1.03	1.25	0.94
S2-18-5	54	2.08	0.33	1.50	1.03	2.00	0.85
S3-18-5	54	1.84	0.66	2.00	1.09	1.75	0.78
S4-18-5	54	1.82	0.66	3.00	1.18	1.25	0.88
S5-18-5	54	2.16	0.66	3.00	1.18	2.00	0.64
R-24-5	72	2.44	0.00	1.00	1.00	1.00	1.00
S1-24-5	72	2.19	0.33	1.50	1.02	1.25	1.16
S2-24-5	72	2.43	0.33	1.50	1.02	2.00	1.01
S3-24-5	72	2.16	0.66	2.00	1.07	1.75	0.80
S4-24-5	72	2.09	0.66	3.00	1.09	1.25	1.07
S5-24-5	72	2.72	0.66	3.00	1.09	2.00	0.78
R-30-5	90	3.18	0.00	1.00	1.00	1.00	1.00
S1-30-5	90	2.89	0.33	1.50	1.02	1.25	0.76
S2-30-5	90	3.12	0.33	1.50	1.05	2.00	0.86
S3-30-5	90	2.76	0.66	2.00	1.07	1.75	0.62
S4-30-5	90	2.63	0.66	3.00	1.07	1.25	0.86
S5-30-5	90	3.55	0.66	3.00	1.07	2.00	0.62

Table -5: Characteristics of setback buildings with 6 m bay width

Building Designation	Height (m)	T _{Modal}	A/L (IS 1893)	L ₁ /L ₁ (ASCE 7)	Karavasilis et.al.2008		(Sarkar et.al.2010)
					S	b	
R-6-6	18	1.37	0.00	1.00	1.00	1.00	1.00
S1-6-6	18	1.23	0.33	1.50	1.25	1.25	0.79
S2-6-6	18	1.28	0.33	1.50	1.25	2.00	0.73
S3-6-6	18	1.11	0.66	2.00	1.75	1.75	0.67
S4-6-6	18	1.13	0.66	3.00	2.00	1.25	0.75
S5-6-6	18	1.17	0.66	3.00	2.00	2.00	0.57
R-12-6	36	1.72	0.00	1.00	1.00	1.00	1.00
S1-12-6	36	1.57	0.33	1.50	1.10	1.25	0.95
S2-12-6	36	1.60	0.33	1.50	1.10	2.00	0.85
S3-12-6	36	1.41	0.66	2.00	1.30	1.75	0.79
S4-12-6	36	1.42	0.66	3.00	1.40	1.25	0.88
S5-12-6	36	1.56	0.66	3.00	1.40	2.00	0.66
R-18-6	54	2.45	0.00	1.00	1.00	1.00	1.00
S1-18-6	54	2.28	0.33	1.50	1.03	1.25	0.96
S2-18-6	54	2.35	0.33	1.50	1.03	2.00	0.86
S3-18-6	54	2.08	0.66	2.00	1.09	1.75	0.78
S4-18-6	54	2.06	0.66	3.00	1.18	1.25	0.89
S5-18-6	54	2.37	0.66	3.00	1.18	2.00	0.66
R-24-6	72	2.68	0.00	1.00	1.00	1.00	1.00
S1-24-6	72	2.52	0.33	1.50	1.02	1.25	0.69
S2-24-6	72	2.65	0.33	1.50	1.02	2.00	0.62
S3-24-6	72	2.35	0.66	2.00	1.07	1.75	0.56
S4-24-6	72	2.30	0.66	3.00	1.09	1.25	0.64
S5-24-6	72	2.84	0.66	3.00	1.09	2.00	0.47
R-30-6	90	3.45	0.00	1.00	1.00	1.00	1.00
S1-30-6	90	3.19	0.33	1.50	1.02	1.25	0.96
S2-30-6	90	3.32	0.33	1.50	1.05	2.00	0.86
S3-30-6	90	2.94	0.66	2.00	1.07	1.75	0.78
S4-30-6	90	2.84	0.66	3.00	1.07	1.25	0.88
S5-30-6	90	3.64	0.66	3.00	1.07	2.00	0.62

Table -6: Characteristics of setback buildings with 7 m bay width

Building Designation	Height (m)	T _{Modal}	A/L (IS 1893)	L ₁ /L ₁ (ASCE 7)	Karavasilis et.al.2008		(Sarkar et.al.2010)
					S	b	
R-6-7	18	1.58	0.00	1.00	1.00	1.00	1.00
S1-6-7	18	1.42	0.33	1.50	1.25	1.25	0.86
S2-6-7	18	1.47	0.33	1.50	1.25	2.00	0.80
S3-6-7	18	1.28	0.66	2.00	1.75	1.75	0.74
S4-6-7	18	1.30	0.66	3.00	2.00	1.25	0.82
S5-6-7	18	1.35	0.66	3.00	2.00	2.00	0.63
R-12-7	36	1.95	0.00	1.00	1.00	1.00	1.00
S1-12-7	36	1.78	0.33	1.50	1.10	1.25	0.94
S2-12-7	36	1.81	0.33	1.50	1.10	2.00	0.85

S3-12-7	36	1.59	0.66	2.00	1.30	1.75	0.79
S4-12-7	36	1.61	0.66	3.00	1.40	1.25	0.88
S5-12-7	36	1.74	0.66	3.00	1.40	2.00	0.66
R-18-7	54	2.73	0.00	1.00	1.00	1.00	1.00
S1-18-7	54	2.58	0.33	1.50	1.03	1.25	0.97
S2-18-7	54	2.65	0.33	1.50	1.03	2.00	0.88
S3-18-7	54	2.35	0.66	2.00	1.09	1.75	0.81
S4-18-7	54	2.33	0.66	3.00	1.18	1.25	0.91
S5-18-7	54	2.62	0.66	3.00	1.18	2.00	0.67
R-24-7	72	2.97	0.00	1.00	1.00	1.00	1.00
S1-24-7	72	2.80	0.33	1.50	1.02	1.25	0.92
S2-24-7	72	2.91	0.33	1.50	1.02	2.00	0.83
S3-24-7	72	2.57	0.66	2.00	1.07	1.75	0.76
S4-24-7	72	2.54	0.66	3.00	1.09	1.25	0.85
S5-24-7	72	3.02	0.66	3.00	1.09	2.00	0.63
R-30-7	90	3.78	0.00	1.00	1.00	1.00	1.00
S1-30-7	90	3.44	0.33	1.50	1.02	1.25	0.94
S2-30-7	90	3.58	0.33	1.50	1.05	2.00	0.84
S3-30-7	90	3.17	0.66	2.00	1.07	1.75	0.76
S4-30-7	90	3.21	0.66	3.00	1.07	1.25	0.86
S5-30-7	90	3.74	0.66	3.00	1.07	2.00	0.62

Table 4 represents the results of the buildings with 5 meters bay width, the table represents the results of 5 buildings with a width of 6 meters, while the table provides results of 4.6 buildings with a width of 7 meters. The height of the building presented here is the maximum height of the buildings. The fundamental period presented here is obtained from modal analysis.

From these tables it can be seen that the parameters given in IS 1893 and ASCE 7 get similar results for separating setback irregularities except for some similar buildings. One of the two indices (B) given by Karvallis. Al., Is a better version presented in 2008

ASCE 7, where it understands the synopsis of the variety of construction of the width, instead of the change of the building width in its plane with its height. Government ET Al (2010) defines irregularity in the context of model parameters. This process is based on two-dimensional plane frame analysis. While calculating the regularity index using this method, it is not suitable for three-dimensional building. The basic way of a shock building is vibration and a similar regular building can not be in the same horizontal direction for a three-dimensional building, and it is difficult to use this method for such buildings. Also, it is clear from these three tables presented above that changes in this period due to setback irregularity are not in line with any parameters discussed here.

The fundamental period for different build back buildings is as the maximum height of the building height. The original period and the Rayleigh analysis from the model analysis have been plotted separately and separated from the empirical equation of IS 1893: 2002. With regular (R) buildings, the fundamental period of all setback types (S 1 to S5) is shown in the same plot so that the pattern of diversity of the original period can be analyzed. The results obtained from ASCE 7: 2010 are similar to those obtained from IS 1893: 2002, hence are not shown separately.

Due to variation in irregularity, this difference of the period is comparatively less for long buildings and less buildings. It is valid for both calculation period from both the observation model and the Rayleigh analysis. It is found that the difference of the fundamental period of calculation with modal analysis and Rayleigh method is quite similar.

4. PARAMETERS AFFECTING FUNDAMENTAL TIME PERIOD

As mentioned earlier, measures to measure irregularities given in the literature are not considered very efficient for formulation parameters. Therefore, to define irregularities with youth height (2011), there was a new approach to considering the average width and height of buildings of shocks. Average height is calculated in proportion to individual bay height summaries in proportion to bay. Similarly, the average width is calculated as the ratio of the sum of the reserves of individual floor width. These average height and average widths are based on the maximum building height and maximum building width respectively on non-dimensional relative.

Table 7 - 9 General average height and general average width of all selected buildings. The fundamental period of the related building also presented them to correlate. It is interesting to see Table 7 - 9 that the general average height and general average width equal to the formation of any shock. Also, these tables show that the fundamental period of the regular building is always greater than the shock buildings. However, the fundamental period of shock buildings is not according to normal average height or width of buildings.

Table 7: Normalised average height and width of the buildings with 5m bay width

Building Designation	h_{nnn}/h	d_{av}/d	Fundamental Period
R-6-5	1.00	1.00	1.17
S1-6-5	0.89	0.89	1.05
S2-6-5	0.78	0.78	1.09
S3-6-5	0.68	0.68	0.94
S4-6-5	0.78	0.78	0.97

S5-6-5	0.56	0.56	1.01
R-12-5	1.00	1.00	1.49
S1-12-5	0.89	0.89	1.37
S2-12-5	0.78	0.78	1.40
S3-12-5	0.68	0.68	1.24
S4-12-5	0.78	0.78	1.24
S5-12-5	0.56	0.56	1.40
R-18-5	1.00	1.00	2.18
S1-18-5	0.89	0.89	2.00
S2-18-5	0.78	0.78	2.08
S3-18-5	0.68	0.68	1.84
S4-18-5	0.78	0.78	1.82
S5-18-5	0.56	0.56	2.16
R-24-5	1.00	1.00	2.44
S1-24-5	0.89	0.89	2.29
S2-24-5	0.78	0.78	2.43
S3-24-5	0.68	0.68	2.16
S4-24-5	0.78	0.78	2.09
S5-24-5	0.56	0.56	2.72
R-30-5	1.00	1.00	3.18
S1-30-5	0.89	0.89	2.89
S2-30-5	0.78	0.78	3.12
S3-30-5	0.68	0.68	2.76
S4-30-5	0.78	0.78	2.63
S5-30-5	0.56	0.56	3.55

Table 8: Normalised average height and width of the buildings with 6 m bay width

Building Designation	h_{nnn}/h	d_{av}/d	Fundamental Period
R-6-6	1.00	1.00	1.37
S1-6-6	0.89	0.89	1.23
S2-6-6	0.78	0.78	1.28
S3-6-6	0.68	0.68	1.11
S4-6-6	0.78	0.78	1.13
S5-6-6	0.56	0.56	1.17
R-12-6	1.00	1.00	1.72
S1-12-6	0.89	0.89	1.57
S2-12-6	0.78	0.78	1.60

S3-12-6	0.68	0.68	1.41
S4-12-6	0.78	0.78	1.42
S5-12-6	0.56	0.56	1.56
R-18-6	1.00	1.00	2.45
S1-18-6	0.89	0.89	2.28
S2-18-6	0.78	0.78	2.35
S3-18-6	0.68	0.68	2.08
S4-18-6	0.78	0.78	2.06
S5-18-6	0.56	0.56	2.37
R-24-6	1.00	1.00	2.68
S1-24-6	0.89	0.89	2.52
S2-24-6	0.78	0.78	2.65
S3-24-6	0.68	0.68	2.35
S4-24-6	0.78	0.78	2.30
S5-24-6	0.56	0.56	2.84
R-30-6	1.00	1.00	3.45
S1-30-6	0.89	0.89	3.19
S2-30-6	0.78	0.78	3.32
S3-30-6	0.68	0.68	2.94
S4-30-6	0.78	0.78	2.84
S5-30-6	0.56	0.56	3.64

S5-12-6	0.56	0.56	1.74
R-18-6	1.00	1.00	2.73
S1-18-6	0.89	0.89	2.58
S2-18-6	0.78	0.78	2.65
S3-18-6	0.68	0.68	2.35
S4-18-6	0.78	0.78	2.33
S5-18-6	0.56	0.56	2.62
R-24-6	1.00	1.00	2.97
S1-24-6	0.89	0.89	2.8
S2-24-6	0.78	0.78	2.91
S3-24-6	0.68	0.68	2.57
S4-24-6	0.78	0.78	2.54
S5-24-6	0.56	0.56	3.02
R-30-6	1.00	1.00	3.78
S1-30-6	0.89	0.89	3.44
S2-30-6	0.78	0.78	3.58
S3-30-6	0.68	0.68	3.17
S4-30-6	0.78	0.78	3.21
S5-30-6	0.56	0.56	3.74

Table 9: Normalised average height and width of the buildings with 7 m bay width

Building Designation	h_{nnn}/h	d_{av}/d	Fundamental Period
R-6-6	1.00	1.00	1.58
S1-6-6	0.89	0.89	1.42
S2-6-6	0.78	0.78	1.47
S3-6-6	0.68	0.68	1.28
S4-6-6	0.78	0.78	1.30
S5-6-6	0.56	0.56	1.35
R-12-6	1.00	1.00	1.95
S1-12-6	0.89	0.89	1.78
S2-12-6	0.78	0.78	1.81
S3-12-6	0.68	0.68	1.59
S4-12-6	0.78	0.78	1.61

3. CONCLUSIONS

The fundamental period of all selected building models was determined according to empirical equations given in model analysis, relay method and design code. The results were critically analyzed and presented in this chapter. The purpose of the analysis and discussion was to identify a parameter that describes the irregularity of the building of the shock and reaches the superior empirical equation to estimate the fundamental period of buildings with shock. However, this study shows that it is difficult to measure irregularity in the formation of a shock with a single parameter. This study indicates that there is a very bad relationship between the basic dimension of three-dimensional buildings with any parameters used to define the set-back irregularity of the previous dimensional or design code. However, it requires access to single or multiple parameters and should be investigated to accurately define irregularities in three-dimensional shock buildings. Based on the works presented in this theory, point-based conclusions can be obtained:

i) The period of shock buildings is always less than the same regular building. Despite the height being stable, the fundamental period of shock buildings varies with irregularity. Changes in the period due to setback

irregularity are not compatible with any of these standards used in literature or design codes to define irregularity.

ii) Code (IS 1893: 2002) gives the empirical thread module analysis and lower level of fundamental period obtained from Relligh method. Therefore, it can be concluded that the code (IS 1893: 2002) always conveys conservative estimates of the fundamental period of shocks with 6 to 30 floors. It can also be seen that the Raleigh method reduces the original duration of the setback buildings, which is also conservative for the selected buildings. However, the Orthodox degree in the Setback Building is not in proportion to regular buildings.

iii) Unlike other available equations, one. ASCE 7: 2010 does not consider the height of the building 2.9, but it only considers the number of floors of the buildings. Although it is not theoretically supported, this approach is found to be the most conservative among other code equations.

iv) It is found that in a complete building, the basic period is not only the work of height construction. This study shows that the same entire buildings Height can vary greatly with different fundamental duration Code which is not addressed in empirical equations.

v) In the empirical equation of the original period, the height of the building has not been adequately defined in the design code. There is no ambiguity for the regular building because the height of the building is similar in both horizontal directions. However, this is not the case of shock buildings where the height of the building can change from one end to the other.

vi) The buildings with the same maximum height and the same maximum width may have different durations, which can be based on the amount of irregularity present in setback buildings. Due to variation in irregularity, this difference of time is comparatively less for long buildings and fewer buildings. This is valid for both the observation model and the Rayleigh analysis both for the duration. It is found that the difference between the fundamental period of calculation with modal analysis and the Rayleigh method is quite similar.

vii) This study indicates that with the original duration, there is a very poor connection between the three-dimensional buildings with the basic dimensional or design code used to define the setback irregularities.

REFERENCES

1. Al-Ali, A.A.K. and Krawinkler, H. (1998). "Effects of Vertical Irregularities on Seismic Behavior of Building Structures", Report No. 130, The John A. Blume Earthquake Engineering Center, Department of Civil and Environmental Engineering, Stanford University, Stanford, U.S.A
2. Aranda, G.R. (1984). "Ductility Demands for R/C Frames Irregular in Elevation", Proceedings of the Eighth World Conference on Earthquake Engineering, San Francisco, U.S.A., Vol. 4, pp. 559-566
3. Chintanapakdee, C. and Chopra, A.K. (2004). "Seismic Response of Vertically Irregular Frames: Response History and Modal Pushover Analyses", Journal of Structural Engineering, ASCE, Vol. 130, No. 8, pp. 1177-1185 .
4. Chopra, A. K. (2003). Dynamics of structures: theory and applications to earthquake engineering. Prentice - Hall, Englewood Cliffs, N.J.
5. Das, S. and Nau, J.M. (2003). "Seismic Design Aspects of Vertically Irregular Reinforced Concrete Buildings", Earthquake Spectra, Vol. 19, No. 3, pp. 455-477.
6. Esteva, L. (1992). "Nonlinear Seismic Response of Soft-First-Story Buildings Subjected to Narrow- Band Accelerograms", Earthquake Spectra, Vol. 8, No. 3, pp. 373-389.
7. Fragiadakis, M., Vamvatsikos, D. and Papadrakakis, M. (2006). "Evaluation of the Influence of Vertical Irregularities on the Seismic Performance of a Nine-Storey Steel Frame", Earthquake Engineering & Structural Dynamics, Vol. 35, No. 12, pp. 1489-1509.