

# Experimental Study by of Soil Mixed with Guar Gum a Bio Enzyme-(case study)

Gujjula Kullayappa<sup>1</sup>, Suresh Praveen Kumar. P<sup>2</sup>

<sup>1</sup>PG Scholar KSRM College of Engineering (Autonomous), Kadapa, Andhra Pradesh.

<sup>2</sup>Assistant Professor KSRM College of Engineering (Autonomous), Kadapa, Andhra Pradesh.

\*\*\*

**Abstract:** Natural biopolymers discussed as environmentally friendly and sustainable grouting chemicals. This paper presents guidelines for selecting potentially useful biopolymers for strengthening cohesion soil. Soil is a universally available natural material derived mostly from rocks and rocky minerals. As soil is a product of nature, possess an inherently variable and complex character. The load bearing capacity is the most important soil property, which governs the design of pavement Guar gum was identified for the study over a range of concentration (0.5%, 1.0%, 1.5%, 2.0%, 2.5%, and 3.0%). Experimental results of Expansive soil treated with various percentages of Guar gum gel for various water content and cured samples of 0, 3, 7 days. Strengthening effect of Guar gum was shown to have greatest effect on expansive soil with curing periods. Depending on biopolymer concentration, the unconfined compressive strength of expansive soil treated with Agar gum biopolymer. Unconfined compressive strength tests over a range of confining pressures also indicated that the biopolymers effectively increased the expansive soil intercept and CBR values of the treated expansive soil.

**Key Words:** Ground improvement; Guar gum; CBR values; unconfined compressive strength; Expansive soil.

## 1. INTRODUCTION

In the present study, expansive soils are considered for effectiveness of biopolymer stabilization. As an alternative to such traditional soil treatment and improvement techniques, biological approaches are now being actively investigated in the field of geotechnical engineering, including microbe injection and by product precipitation. In particular, microbial induced polymers—or biopolymers— have been introduced as a new kind of construction binder, especially for soil treatment and improvement. To date, most studies on these applications of biopolymers have been experimental efforts that have produced preliminary findings and analyses, and the number of theoretical explanations and case studies of practical implementation in the literature are still limited. In response, this paper provides a detailed review of biopolymer applications in geotechnical engineering including the most recent studies. In this review, strengthening mechanisms between typical biopolymers and soils based on microscopic inter-particle interactions are summarized. The advantages and disadvantages of biopolymer applications are compared with those of existing soil engineering methods. Finally, the

potential for practical implementation is evaluated via an economic feasibility analysis, including environment-friendly considerations.

## 2. LITERATURE REVIEW

**Ivanov and Chu (2008)** Concluded the majority of the studies on Microbial Geo technology at present are at the laboratory stage. Two important applications, bio blockage along with bio cementation had been explored.

**Dejong et al (2013)** Observed that bio-induced mineralization in soils may reduce the pore space of soil and strengthen the particle contacts, leading to increased strength and decreased permeability and compressibility.

**Chen and Zang (2013)** Studied Xanthan gum and guar gum, biopolymers which can be obviously going on and cheaper, to stabilize mine tailings (MT). By evaluating undrained shear electricity statistics with empirical equations within literature, new equations had been proposed for predicting undrained shear strength MT blended with a biopolymer for water filling close to fluid restriction, based totally on the liquid restriction and water content, and the liquidity index.

**Sharma et al (2008)** Had studied on “The engineering behaviour of remoulded expansive clay blended with lime, calcium chloride and Rice-husk ash”. They added amount of lime, calcium chloride and rice husk ash were varied from 0 to 2%, 0 to 5% and 0 to 16%, respectively by the weight of natural soil. The effect of admixtures on unconfined strength and CBR was found. The UCC strength of natural soil improved up to 1% calcium chloride or 5% lime. The strength improvement in UCS of 225 and 328% was observed. A rice husk content of 12% was found to be the optimum for both the UCS and CBR. An optimum percent of calcium chloride and lime is 1% and 4% respectively.

## 3. MATERIALS AND METODOLOGY

### 3.1 Expansive Soil

Expansive soil is a type of clay that is known as a light weight aggregate with a rounded structure, with a porous inner and a resistant and hard outer layer. It is soils that are chance to large volume changes (swelling and shrinkage)

that are directly related to water content can form deep cracks in summer seasons. Such soils are called vertisoils with smectite clay minerals like montmorillonite and bentonite, have the most dramatic shrink-swell capacity. Expansion of soils tends to be exert enough force on a buildings or roads pavements or other structures to cause serious damages.

The soil used in this investigation the expansive soil collected from the Thadigotla village area, near Krishnapuram, Kadapa, A.P, India. The pebbles and vegetative matter present at the site are removed by hand. The soil is collected at 1.0m depth below the natural ground level. It is dried and pulverized and sieved through a sieve of

4.75 mm size to eliminate gravel fraction, if any. This dried and sieved soil is stored in airtight containers ready for use for mixing. The soil is classified as 'CH' as per I.S. classification (I.S. 1498:1978) indicating that it is Inorganic Clay of High Plasticity. Its degree of expansiveness is very high as the Differential Free Swell Index (DFSI) is 140 per cent.

**Table 3. 1: Physical properties of Expansive soil**

Sl.No	Properties of the soil	Details
1.	<b>Grain size distribution:</b>	
	(a) sand	14%
	(b) silt	22%
	(c) Clay	64%
2.	<b>Atterberg Limits:</b>	
	(A) Liquid Limit	72%
	(B) Plastic Limit	39%
	(C) Plasticity Index	38%
3.	<b>IS Classification</b>	CH
4.	<b>Differential Free Swell Index</b>	78.95%
5.	<b>Specific Gravity</b>	2.43
6.	<b>Compaction Characteristics</b>	
	(A) Maximum Dry Unit Weight	1.45g/cc
	(B) Optimum Moisture Content	23.67%
7.	<b>California Bearing Ratio Value</b>	2.39%
8.	<b>Unconfined Compressive Strength</b>	1.02kg/c m <sup>2</sup>


### 3.2 Guar gum

The Guar or cluster bean (CyamopsisTetragonoloba) is an annual legume and the source of Guar gum. It is also known

as Gavar, Guwar or Guwar bean. Few agriculturists in semi-arid regions use guar as a source to replenish the soil with essential fertilizers and nitrogen fixation, before the next crop. Guar as a plant has a multitude of different functions for human and animal nutrition but its gelling agent containing seeds (Guar gum) are today the most important use. This was added with dispersive soil and pond ash in different percentages (0.5%, 1%, 1.5%, 2.0%, 2.5% and 3%).

**Table3. 2: Properties of Guar gum**

Sl.No	Contents	Details
1	<b>Physical state</b>	<b>Dry, cream-colored powder</b>
2	<b>Moisture (%)</b>	<b>8-15%</b>
3	<b>Ash</b>	<b>7-12%</b>
4	<b>Nitrogen</b>	<b>0.3-1.0%</b>
5	<b>Acetate content</b>	<b>1.9-6.0%</b>
6	<b>Pyruvate</b>	<b>1.0-5.7%</b>
7	<b>Monovalent salt</b>	<b>3.6-14.3%</b>
8	<b>Divalent salt</b>	<b>0.085-0.17%</b>
9	<b>Viscosity</b>	<b>13.35</b>

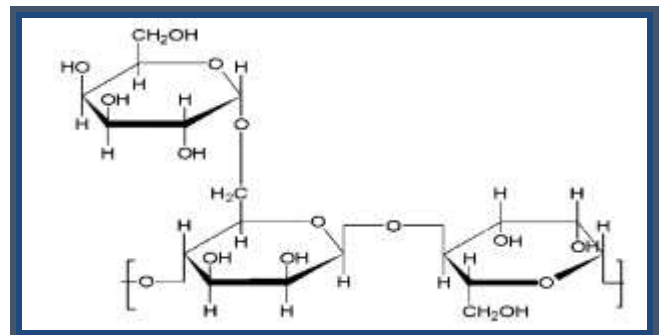

**Figure3. 1: Idealized structure of guar gum.**

### 3.3Procedure for mixing

The soil sample kept ready to mixed with anhydrous guar gum powder of varying percentages are varied from 0.0 to 3.0% by the weight of the soil, in increment 0.5% per cent. The soil and guar gum powder are mixed thoroughly and is used for the test.

The experimental programmes are broadly divided into six categories, viz.

1. Atterberg limits
2. Differential Free Swell Index
3. Compaction characteristics


- 4. California Bearing Ratio Values
- 5. Strength characteristics and
- 6. SEM analysis

**4.0 Results And Discussions:**

**General**

The results derived from the various experiments were presented in both tabular form as well as graphical form and subsequently discussed. the main objective of the this study is to assess the applicability of soil chemical stabilization, with respect to the density, moisture content, unconfined compressive strength and California bearing ratio value.

**4.1 PLASTICITY CHARACTERISTICS**

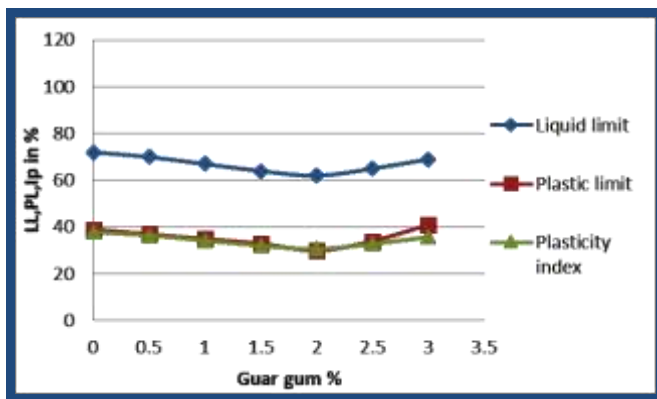


**Figure 4.1: Plasticity Characteristics of guar gum Admixed Soil.**

When guar gum reacts with wet soils, it alters the nature of the adsorbed layer. Ions replace the sodium or iodine ions. The double layer is usually depressed due to an increase in the cation concentration. Hence, in guar gum stabilization, the liquid limit and plastic limit of the soil decreases. Thus, the plasticity index of the soil decreases, the soil becomes more friable and workable. There is reduction in Liquid limit of soil with addition of guar gum up to the incremental percentage of 2.0% beyond this it has been observed that there is increase in Liquid limit. Same trend of effect of guar gum observed in case of Plastic Limit values also like as incase of LL. The influence of guar gum on Plasticity Index of soil is considerable up to the 2.0% guar gum admixed soil.

**4.2 Compaction Characteristics:**

Standard Proctor’s compaction tests are carried out on black cotton soil admixed with guar gum at various percentages ranging from 0.0% to 3.0% by weight of the soil in increment of 0.5%.

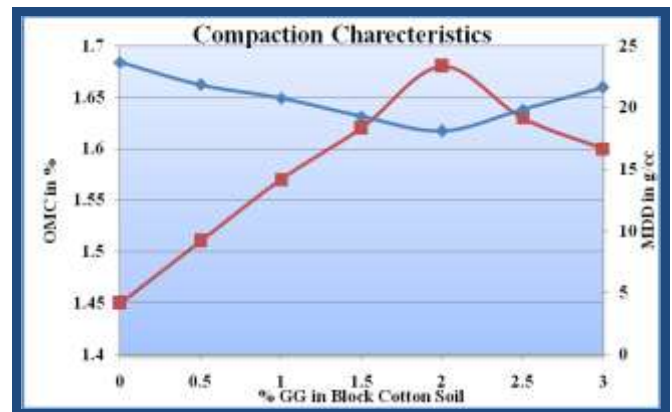

**Figure 4.2: GG % Vs OMC cum MDD**

But the Dry density goes on increase from 0.0% to 2.0%, after the 2.0% the dry density trend goes on decrease with increase in guar gum percentage. From the test results Optimum Moisture content decreases and Maximum Dry Density values are increases up to 2.0% of guar gum.

**4.2.1 Optimum Moisture Content**

Table 4.2 Depicts the relationship between the optimum moisture content verses percentage of guar gum by the weight of soil, the decreasing in water content with the increase in guar gum percentage up to 2.0%, but beyond this increase in guar gum causes more amount of moisture content requirement to achieve max dry density corresponds to that moisture content.

**4.2.2 Maximum Dry Density**


The relationship between the maximum dry density and GG percentage by the weight of soil. the increasing in maximum dry density of 1.68 g/cc up to 2.0% of biopolymer, Excess percentage of the GG the dry density value may be decreasing for 2.5% and 3.0%. Hence, it is concluded that the 2.0% Of biopolymer is gives the maximum dry density i.e., 1.68g/cc. water content is 18.10%.

**4.2.3 California Bearing Ratio**

The CBR value of soil samples admixed with GG increase with increase in percentages of GG up to 2.0% and It is found that the excess of GG more than 2.0% causes decrease in CBR value. Because of reactions and basic nature of Biopolymer it transformed into a lumps when it is mixed with corresponding water content. So that, excess percent of guar gum results in decrease in CBR value.

**Table 4.1: Unsoaked & Soaked CBR Values of Expansive soil sample with varied % of Guar gum.**

S.No	% Of Guar Gum	Un-soaked	soaked
1	0.0% GG	2.39	1.96
2	0.5% GG	3.50	2.76
3	1.0% GG	4.78	3.76
4	1.5% GG	5.46	4.44
5	2.0% GG	7.60	5.21
6	2.5% GG	5.81	4.35
7	3.0% GG	5.29	3.93

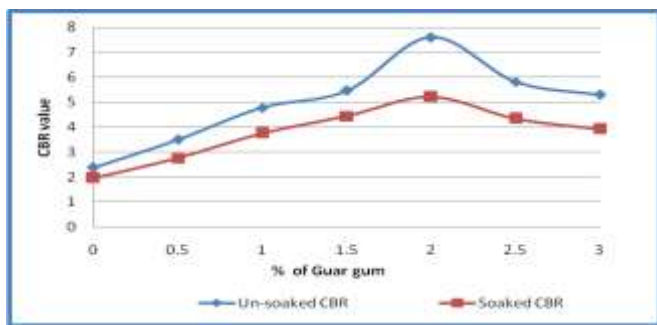


**Figure 4. 3: CBR Of Soil With Guar Gum Vs Un-Soaked And Soaked**

#### 4.3 Unconfined Strength characteristics

The unconfined compressive strength value of soil samples admixed with GG increase with increase in percentages of GG up to 2.0% and It is found that the excess of GG more than 2.0% causes decrease in strength value. Because of reactions and basic nature of Biopolymer it transformed into a lumps when it is mixed with corresponding water content. So that, excess percent of guar gum results in decrease in unconfined compressive strength value.

**Table 4.2: UCC Strength at different Curing Periods of Guar gum admixed Soil**


% Of GG	UCC Strength in Kg/cm <sup>2</sup> at different Curing Periods		
	0 DAY	3 DAYS	7 DAYS
0.00	1.02	1.08	1.201
0.50	1.37	1.48	1.78
1.00	1.51	1.74	1.91
1.50	1.90	2.03	2.20
2.00	2.24	2.51	2.72
2.50	1.93	2.17	2.41
3.00	1.61	1.78	2.10

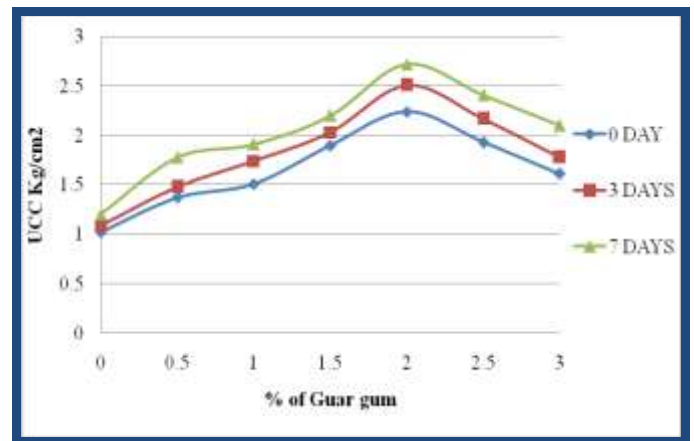

**Figure 4.4: Un-Confined Compressive Strength**

#### 4.4 SEM analysis

From the SEM analysis the increase in guae gum percentage in the soil sample changes amorphous structure from crystalline structure of natural soil.

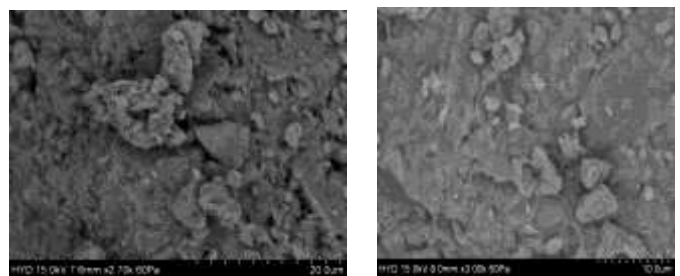

**Figure 4.5: SEM analysis Images of guar gum admixed soil 0% and 2.0%**

#### 5.0 Conclusions

1. There is reduction in Liquid limit of soil with addition of Guar gum up to the incremental percentage of 2.0% beyond this it has been observed that there is increase in Liquid limit, because of reaction between soil and biopolymer mixerconverted into lumps form.

1. With increasing proportion guar gum, liquid limit values are decreased from 72% to 62% with proportion decrease is 13.89%.

2. With increasing proportion of guar Gum, the plastic Limit values are decreased 39% to 30.66% with proportion decrease is 23.08%.

3. With increasing proportion of guar Gum, the Plasticity Index values are decreased from 37.96% to 30.66% and the percentage decreased is 19.23%.

4. The maximum dry density of untreated soil to 2.0% of biopolymer treated soil is increases from 1.45 g/cc to 1.68 g/cc. There is reduction in optimum moisture content with

per cent increase in guar gum by weight of the soil up to 2.0%.

5. The optimum moisture content for natural expansive soil is 23.67% and for 2.0% guar gum treated soil is 18.10%. The decrement decrease of moisture content up to 2.0% of guar gum. Beyond the 2.0% guar gum viz, 2.5 and 3.0% of biopolymer the water contents may be increases.

6. The California Bearing Ratio value of the soil is influenced by the addition of guar gum. The maximum increase in California Bearing Ratio value of soil admixed with guar gum which occurs at 2.0%.

7. The un-soaked CBR value of soil with 0.5 to 2.0% of guar gum admixed soil showed an increment of 46 to 217%. Whereas 2.5% of biopolymer admixed soil shows an increment of 143%.

8. The soaked CBR values for soil with 0.5 to 2.0% of guar gum admixed soil showed an increment of 40 to 165%. Beyond the 2.0% guar gum per cent the soaked CBR values decreased. The maximum un-soaked CBR value of 2.0% guar gum admixed soil is 3.2 times that of the natural expansive soil.

9. The strength of soil samples admixed with guar gum tested immediately increase with increase in per cent of guar gum. The unconfined compressive strength of the admixed soil increases with in biopolymer percentage and curing period.

10. The unconfined compressive strength of natural soil is 1.02 kg/cm<sup>2</sup> in all curing days. 3 days and 7days curing strengths of 2.0% biopolymer treated soil is 2.51 kg/cm<sup>2</sup> and 2.72 kg/cm<sup>2</sup> respectively.

11. The Unconfined compressive strength of admixed soil at 2.0% biopolymer for the sample tested with 7 days curing period is 2.6 times that the Unconfined Compressive strength of the natural soil.

## REFERENCES

- [1] Ivanov, V. & Chu, J. (2008). "Applications of micro-organisms to geotechnical engineering for bioclogging and biocementation of soil in situ". *Reviews in Environmental Science and Biotechnology*, 7, 139-153.
- [2] De Jong, J. T. et al (2013). Biogeochemical processes and geotechnical applications: progress, opportunities and challenges *Geotechnique* 63, No. 4, 287-301 [<http://dx.doi.org/10.1680/geot.SIP13.P.017>].
- [3] T. William Lambe, Za-Chieh Moh (1962), "Improvement of Strength of Soil-Cement With Additives". Research gatenet Publication, Massachusetts Institute Of Technology, Cambridge.
- [4] Babu Shanker N (1996), "Effect of Chemical (Calcium Chloride) Pounding on Properties of Back Cotton Soil". *Proceedings of the National Conference on Problematic Subsoil Conditions*.
- [5] Manchikanti Srinivas, G.V.R. Prasada Raju (2009), "XRD and SEM Studies Of Chemically Treated Expansive Soil Subgrades", *Indian Geotechnical Conference IGC 2009, INDIA*.
- [6] S. P. Guleria, Rakesh Kumar Dutta (2011), "Unconfined Compressive Strength of Fly Ash-Lime-Gypsum Composite Mixed with Treated Tire Chips", *Article in Journal of Materials in Civil Engineering*,
- [7] Srikanth, B. Yamini Lakshmi & D. Pavani (2011), "Effect of sea water on some geo technical properties of clayey soil", *International Journal of Earth Sciences and Engineering, Vol 04*.
- [8] A. V. Narasimha Rao , M. Chittaranjan , K. V. N. Laxma Naik (2012), "Undrained Shear Strength Characteristics Of An Expansive Soil Treated With Certain Industrial Effluents At Different Pore Fluid Content Ratios", *International Journal of Innovative Research in Science, Engineering and Technology Vol. 1, Issue 1*.
- [9] K.V. Manoj Krishna, H.N.Ramesh (2012), "Strength and F O S Performance of Black Cotton Soil Treated with Calcium Chloride", *IOSR Journal of Mechanical and Civil Engineering (IOSRJMCE) ISSN: 2278-1684 Volume*.
- [10] P. Ramesh & T. Srikanth (2012), "Effect of a Chemical Contamination on Geotechnical Properties of Black Cotton Soil", *International Journal of Science Technology & Engineering volume 2*.
- [11] P. Ramesh, A. V. Narasimha Rao, N. Krishna Murthy (2012), "Efficacy Of Sodium Carbonate And Calcium Carbonate In Stabilizing A Black Cotton Soil". *International Journal of Emerging Technology and Advanced Engineering, ISSN 2250-2459, Volume 2, Issue 10*.
- [12] Ramadas, Kumar and Yesuratnam (2012), "A study on strength and swelling characteristics of three expansive soils treated with CaCl<sub>2</sub>", *International Journal of Advances in Civil Engineering and Architecture. Vol 1 (1)*.