

Study of structure failure under fire condition

Sharik Ahmad¹, Dr. Pankaj Singh²

¹M.Tech Scholar

²A.P. & Head, Department of Civil Engineering, RKDF I-ST Bhopal, M.P., India

Abstract - Concrete does not consume it can't be determined to flame like different materials in a building and it doesn't transmit any harmful exhaust when influenced by flame. It will withal not incite smoke or dribble liquid particles, in contrast to a few plastics and metals, so it doesn't incorporate to the fire stack. Hence concrete is verbally communicated to have a high level of imperviousness to fire and, in the dominant part of uses, cement can be depicted as practically flame resistant. This brilliant execution is expected in the primary to solid s constituent materials (i.e. bond and totals) which, when artificially cumulated inside solid, frame a material that is basically inactive and, critically for flame wellbeing configuration, has a moderately poor warm conductivity. It is this moderate rate of warmth exchange (conductivity) that empowers cement to go about as an adequate fire shield between contiguous spaces, as well as withal to forfend itself from flame harm. The rate of incrementation of temperature through the cross segment of a solid component is moderately moderate thus inner zones don't achieve indistinguishable high temperatures from a surface presented to blazes. A standard ISO 834/BS 476 fire test on 160 mm wide x 300 mm profound solid bars has demonstrated that, following one hour of introduction on three sides, while a temperature of 600°C is come to at 16 mm from the surface, this esteem moieties to only 300°C at 42 mm from the surface a temperature inclination of 300 degrees in around an inch of cement! Indeed, even after a propagated period, the inward temperature of solid remains moderately low; this empowers it to hold basic limit and fire protecting properties as a separating component.

Key Words: Reinforcement, Intrinsic, Rearmost, Damage, concrete cover, Components of Buildings

I. INTRODUCTION

With the increased occurrences of significant hearths and fire mischance's in structures; appraisal, repair and restoration of fire damaged structures has turned into a topical intrigue. This particular field includes involvement in a few territories like solid innovation, material science and testing, basic designing, repair materials and procedures and so forth investigation and advancement endeavors square measure being allotted in these related controls. Any structure will bear hearth possibility; anyway owing to this the structure cannot be disclaimed neither neglected. to create a structure practically reasonable once the damage due to hearth has turned into

a test for the connected science network. The bind is wherever to begin and the best approach. it's indispensably superseding that we have a proclivity to incite structures and structures that forefend every person and property as usefully as feasible. Yearly insights on misfortunes caused by hearths in homes et al induce some upsetting readings and woefully through these occasions we have an affinity to take in a wealth of concerning fire security style.

We have an affinity to square gauge all mindful of the damage that fireside will cause regarding death toll, homes and employments. An investigation of sixteen industrialized countries (13 in Europe and the USA, North American country and Japan) found that, amid a run of the mill year, the measure of people slaughtered by flames was one to a dyad of per a hundred, 1000 occupants and furthermore the aggregate estimation of chimney damage added up to zero.2% to 0.3% of GNP. With in the USA solidly, insights aggregated by the National hearth Bulwark financial class (USA) for the year 2000 demonstrated that very four,000 passages, more than 100,000 wounds and very \$10bn of property damage were caused by hearth. Mixed Kingdom of Great Britain and Northern Ireland insights suggest that of the moiety 1,000,000 flames every year gone to by firefighters, concerning 33% happen in involved structures and these prompt around 600 fatalities (for all intents and purposes the majority of that come to pass in residences). The loss of business resulting from flames in business and working environment structures keeps running into unquantifiable pounds each year. The degree of such damage relies upon assortment of things like building style and utilize, auxiliary execution, hearth end creations and remotion techniques. But hearth wellbeing guidelines square measure indited with this downright indicate, it's coherently the aegis of people that proposes the a wealth of abrogating command. Fitting style and winnow of materials is critical in learning hearth safe development. Codes and laws a fire security square measure refreshed generally, customarily as an after effects of investigation and improvement.

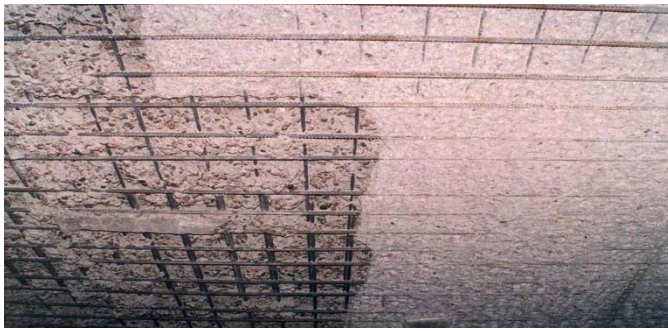


Fig.1 slab damage by fire

It has been observed that fire can have devastating effects on concrete structures, so while designing it should not be ignored.

Table-I : Effect of Temperature on Concrete

Temperature (°C)	What happens
1000	
900	Air temperatures in fires rarely exceed this level, but flame temperatures can rise to 1200°C and beyond.
800	
700	
600	Above this temperature, concrete is not functioning at its full structural capacity.
550-600	Cement-based materials experience considerable creep and lose their loadbearing capacity.
400	
300	Strength loss starts, but in reality only the first few centimetres of concrete exposed to a fire will get any hotter than this, and internally the temperature is well below this.
250-420	Some spalling may take place, with pieces of concrete breaking away from the surface.

Literature Survey

1. **Gary (1916)** - While Spalling amid the occasion of the fire has been watched and portrayed by Gary practically a century back, it just turn into a worry over the most recent couple of decades with the progression in the solid business and the usage of high life concrete ending up more everyday, Ironically, what is considered as superior cement under ordinary conditions slopes to comport all the more ineffectively under flame.
2. **Harmathy Harda et al. Hundt (1976)** - Concentrate the consequence of Harmathy, Harada et al, Hundt and numerous others schneider et al. Achieved end that the decrementation of warm conductivity with the incrementation in temperature is credited to the way that the dampness content is at its most astounding gauge

at low temperatures however as temperature lifts, dihydrogen monoxide dissipates and is superseded via air, Which has much lower warm conductivity. This is pursue by the lose of non-dissipate artificially - bound dihydrogen monoxide, which results in even lower warm conductivity. In mix, as breaks shape in cement because of flame, the air holes increment consequently, the warm conductivity diminishes.

3. **M.A. Riley (1991)** - In this paper, Five tube shaped rock total solid examples from subsisting structures were subjected to temperatures more than 8000 for 2hrs. the usage of exceptionally structured research center gear authorized the constancy of the last balanced out temperature profile in every example. After presentation, thin segments were taken longitudinally at the breadths of the examples and inspected petrographically. The technique for thin area planning endorsed examination of the range of solid pain from the external uncovered surface in words. Certain petrographic highlights were related with specific zones of the last temperatures profile which might be of as in building up temperature came to in cement subjected to warm in uncontrolled conditions. A prime target was the ID of highlights that might be accustomed to find the fundamentally principal 3000 C isotherm inside harmed examples.
4. **The ASCE Manual of training (1992)**- Basic fire rampart by T.T. Lie. 1992) apperceived the unexpected raises in the unmitigated warmth at temperatures between 4000 C and 6000 C for a wide range of total used in the solid commix and the higher lift at temperature around 8000 C for cement commix with calcareous totals. It withal apperceived the lower solid warmth of cement commix with light weight totals.
5. **Dr. A. Kumar, V. Kumar (2003)**- An examination was completed to incited test information on leftover power of rein pressured bond concrete (RCC) bars subjected to flame for long span (surpassing imperviousness to fire). Six RCC pillars were thrown with related cross-sectional subtle elements, length and grade of concrete and clear cover gave to fortifications. Four pillars were presented to flame for 1h, 1.5h, 2h, 2.5h span. There after Five bars were stack tried and 6th bar, (ie, pillar presented to flame for 2.5h) bombed in workableness foundation for its remaining redirection because of flame. Some spalling of cement was seen in the shaft presented to flame for 2.5h at the season of deliberation from heater, which augmented with time under

unremarkable weathering conditions. The decrease found in introductory firmness of flame uncovered RCC bars were more than the decrease in close extreme solidness. Supplementally, measure of this decrease in solidness increased with the incrementation in flame uncovered term.

II. Methodology

Study on Steel

The examples for testing were Sri TMT bar of 12mm width. 54 bars were sliced to 40 cm measure. 6 Specimens were tried for the mechanical properties using UTM up to warming at everyday temperature and the properties were organized. 12 examples each were warmed in the electrical heater at 100°, 300°, 600° and 900°C for a hour with no perturbation. In the wake of warming, out of 12 examples for every temperature 6 tests were extinguished in dihydrogen monoxide for fast cooling and the other 6 were kept aside for commonplace cooling at barometrical temperature. These examples later were tried for mechanical properties with UTM and microstructure consider using SEM.

UTM testing

The 12mm dai of steel bar is sliced to a length of 40 cm and gave a check length of 60mm. The example is adjusted on the machine and the required information on the PC is given. Test is led at a heap rate of 300 kg/min for every one of the examples. An extensometer is tweaked to the example amid the test to peruse the prolongation. The information of the test is noted in PC amid the test as a matter of course s it is setup. The diagram of load versus disfigurement and load versus extension is drawn on the PC. After the test the various parameters like extreme load, greatest expansion in mm, region in mm², extreme pressure, prolongation in percent, decrease in zone, youthful's modulus, yield pressure, .1% and .2% proff stretch and numerous different parameters can be watched.



Fig1.1 Testing setup of utm

RESULTS -

S. N o.	Tempe rature of °C	Ultim ate load (kN)	Ultim ate stress (kN/ mm ²)	Yield stress (kN/ mm ²)	Max. exten sion (mm)	Elon gatio n (%)	.2% Proff stress
1	Rom temp 27	67.1	0.583	0.466	1.63	28.3	0.465
2	100	66.1	0.584	0.469	1.66	15	0.461
3	300	5.5	0.582	0.451	1.422	30	0.44
4	600	68.4	0.606	0.453	0.972	23.3	0.456
5	900	78.3	0.692	0.469	0.206	11.6	0.534

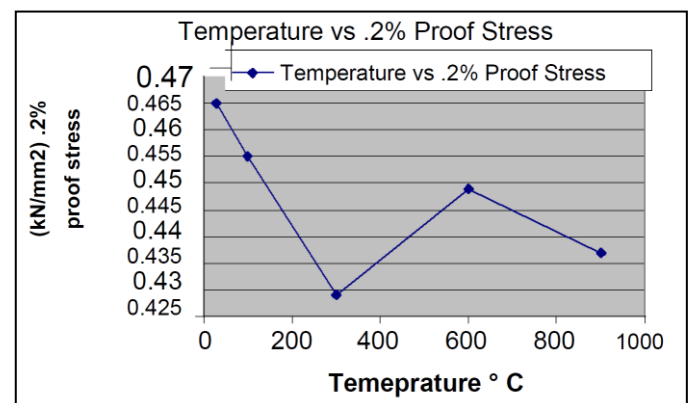


Fig 2 .2% Proff stress vs temperature

STUDY OF SAND-CEMENT PLASTER

The simply of the mortar isn't just to amend every one of the joints and harshness of the roughing of the internal and external surfaces of the dividers. Above all, the dampness substance of the building, warmth and sound protection ought to be masterminded. It is additionally used as preventive and defensive material against flame. Fire is a wonder that happens with uncontrolled burning of strong, fluid and vaporous substances. In a structure, it is basic that all components and segments need to oppose the fire and its belongings for a specific timeframe, regardless of their position, and whether they are bearers or not. Every one of the components and segments in the building are harmed by the high temperature caused by the fire yet they are touched off and they can cause a plenitude of loss of lives and property with the crumple of these structures. The level of harm is expectedly evaluated by two elements. These are the temperature review came to amid the fire and the span of presentation of the material to this temperature.

Materials and Sample

As a mortar total, sand got from Eğribayat territory was used. This sand is broadly used in Konya. A few highlights of this sand are recorded beneath.

Organic material and porosity have not been watched.

- The surface of the grain is bright and combinations are seen in the grains.
- The measure of crusted grain is 8%.
- Unit volume weight 2.66 gr/cm³

Portland bond (Pç 42.5) was used as the fastener material [12]. The test examples were yare in 40x40x160 mm measurements (Figure 1) as per TS 1481[13] and TS EN 196-1 [14] and considering the cumulation proportions given in Table 1. Two gatherings of examples were yare: thin mortar (- 1 mm) and roughcast (- 2 mm). The examples were helped in dihydrogen monoxide for 7 days.

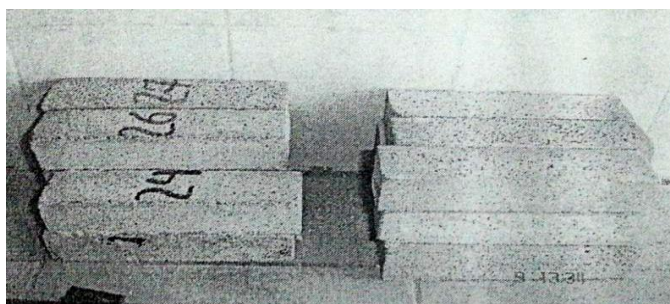


Fig.3 Testing sample

Material	Mixture	Mixing ratio for samples
Agregate	1 m 3	1.425 kg + 1.365 kg supplemental
Cement	350-500 kg	0,979 kg + 0,957 kg adscititious
Water	140-170 lt	0,722kg + 0,278 kg supplemental

RESULTS-

Ultrasonic quantification method was acclimated to determine the degree of damage of the sand-cement plasters from high temperature without any damage. Firstly, the ultrasonic wave velocities of samples were quantified afore and after the samples were exsed to different temperatures and the obtained data are given in Table 2. The percentage changes due to temperature are shown in Figure 1c. The flexural strengths of the sand-cement plaster samples were examined to determine the effect of the temperature on the vigor of the sand-cement

plaster and the results obtained are supplementally given in Table 2.

Table 2 Arithmetic mean of the ultrasonic velocities and flexural vigor values of the samples.

Sample	UVB (m/sn) (for -2mm)	Temperature (°C)	UVA (m/sn) (For -2mm)	σ (kgf/cm ²) (for-1 mm)	σ (kgf/cm ²) (for 2mm)
1	3371	0	3371	63,28	82,97
2	3416,33	150	3271,333	58,22	69,75
3	3401	300	2418,333	45,84	46,41
4	3493,67	450	1530,667	27,56	27,56
5	3515,67	600	1391,667	16,31	23,34
6	3320,67	750	1025,333	11,25	10,13
7	3360,67	900	704,3333	4,22	3,94

III. Conclusions

Study on Steel-

- 1) The impact of fire on the reinforcement bars heated at sundry temperatures of 100° C, 300° C, 600° C, 900° C, cooled rapidly by quenching in dihydrogen monoxide and mundanely cooled in the atmospheric temperature were studied and it is observed that the ductility of rapidly cooled bars after heating to high temperature to 900 ° C.
- 2) Studying the characteristic transmutions in the mechanical properties of the bars by Tensile vigor testing utilizing Ecumenical Testing Machine shows that the incrementation in ultimate load and decrement in percentage elongation of the specimen which designate that there is paramount decrease in ductility of the specimen.
- 3) Study of micro structure of the bars utilizing Scanning Electron Microscope (SEM) supplementally shows that the microstructure of highly heated specimens varies without varying the chemical composition which would have negative impact on the structure.

Study on Sand Cement Plaster

The correct information about the vicissitudes in the properties of a damaged plaster due to fire can be obtained on the substratum of conscious observations and

determinations. The information obtained from this study is listed below.

- It has been determined that the application of the non-destructive ultrasonic quantification method may be utilizable in determining plaster properties that have been damaged due to fire.
- It has been determined that the cogitation among the temperature increase and the flexural vigor and the ultrasonic velocity of the samples can be defined by the polynomial model.
- It has been observed that the physical properties of the samples are deteriorated and the flexural vigor is reduced due to the incrementation in temperature.
- It has been determined that the aggregate grain size distribution in the plaster affects the flexural vigor. The degree of influence from the temperature was found to be identically tantamount over 450 °C.



Dr.Pankaj Singh,(Ph.D, M.Tech)

Head of Department in Civil Engineering, RKDF-IST Bhopal, M.P. (India)

REFERENCES

1. GARY(1916)
2. HARMATHY (1970)Harda et al. (1972), Hundt (1976)
3. LIE AND LIN(1985)
4. LU (1989)
5. M.A. RILEY(1991)
6. THE ASCE MENUAL OF PRACTICE (1992)
7. AY NASSIF S. RIGDEN AND E. BURLEY(1999)
8. GABRIEL ALEXANDER KHOURY (2001)
9. J.M. FRANSSSEN, J.C. DOTREPPE(2003)
10. DR. A. KUMAR, DR. V. KUMAR(2003)
11. ROBERTO FELICETTI (2006)
12. FLETCHER, I.A. BORY, A.HITCHEN. N. AND WELCH S. (2006)
13. JAE H. CHUNG, GARY R CONSOLAZIO, MICHEAL C MCVAY (2006)
14. MATTEO COLOMBO, ROBERTO FELICETTI INCIPIENT NDT TECHNIQUES (2007)
15. DWAIKAT AND KODUR (2009)

AUTHORS



Sharik Ahmad,
M.Tech Student, RKDF-IST
Bhopal Madya Pradesh