International Research Journal of Engineering and Technology (IRJET) e-Is Volume: 07 Issue: 03 | Mar 2020 www.irjet.net p-Is

Remote Health Monitoring System using IoT

Avita Shelar¹, Vaishnavi Pardeshi², Pranil Wavle³, Vaishali Sanap⁴

^{1,2,3}Student, Dept. of Computer Engineering, A.I.S.S.M.S. Polytechnic Pune, Maharashtra, India ⁴Lecturer, Dept. of Computer Engineering, A.I.S.S.M.S. Polytechnic Pune, Maharashtra, India ***

Abstract – Internet of Things (Iot) is an ecosystem of connected physical object that are accessible through the internet. IOT devices are used in many application fields which makes the user's day to day life more comfortable. These devices are used to collected temperature, blood pressure, and sugar level etc. Which are used to evaluate the health condition of the patient? Communicating the collected information to the doctor, making accurate decision on the data collected and notifying the patient is the challenging task in the IOT. In this project, A Remote Health Monitoring System using Iot (RHMS) using arduino is proposed to collected the required parameters and evaluate the data obtained from the sensor devices. RHMS with arduino also gives the notification to patient with possible precautionary measure to be practiced by them.

This system suggests the patient with medical care and next step to be followed in case of critical situation. The combination of lot with ardiuno is the new way of introducing Internet of Things in Health care Monitoring system of patients.

Key Words: Internet of Things, Arduino, Sensors.

1. INTRODUCTION

In low and middle income countries, there is increasingly growing number of people with chronic disease due to different due to different risk factors such as dietary habits, physical inactivity, and alcohol consumption among others. According to the World Health Organization report, 4.9 million people die from lung cancer from the consumption of snuff, overweight 2.6 million,, 4.4 million for elevated cholesterol and 7.1 million for high blood pressure. Chronic

Disease is highly variable in their variable in their symptoms as well s their evolution and treatment. Some if not monitored and treated early, they can end the patient's life. For many years the standard way of measuring glucose levels, blood pressure levels and heart beat was with traditional exams in a specialized health centers. Due to the technological advances in today, there is great variety running sensor reading vital sign such as blood pressure cuff, glucometer, and heart rate monitor, including electrocardiograms, which allows patients to take their vital signs daily. The internet of things applied to the care and monitoring of patient is increasingly common in the health Sector, seeking to improve the quality of life of people. The internet of things is defined as the integration of all devices that connect to the network, which can be managed from the web and in the turn provide information in all real time to allow interaction with people they use it

1.1 REMOTE HEALTH MONITORING USNING GSM

Remote health monitoring system using arduino. Here the parameters of a patient (temp, heartbeat, ECG, position) are wirelessly transmitted using and if any parameter falls below threshold, an SMS is sent to predefined doctor's mobile number using arduino. Arduino based Remote Health Monitoring Project mainly works for allowing doctors or relatives of patient to check the status of patient health remotely. The system calculates the heartbeats and body temperature of patient and if it goes above certain limit the immediate informative alert message will be sent to the registered number. For this system we used AVR Family Microcontroller which is interfaced with LCD display, heartbeat sensor and temperature sensor. The lot based Remote health monitoring system works with arduino to send the data remotely to the registered number, system powered by 12V transformer. The system also featured with manual health button using that the patient with some other issues will also able to contact with doctor so, the system is very helpful for saving life of patient. The system also introduced a function through which a doctor will able to check the status of patient after a certain interval of time by sending message. The system efficiently updates doctor about health of patient as well as accurately calculates the health parameter of patient. In this fast pace of life, it is difficult for people to be constantly available for their near ones who might need them while they are suffering from a disease or physical disorder. So also constant monitoring of the patient's body parameters such as temperature, pulse rate, sugar level etc. becomes difficult. Hence to remove human error and to lessen the burden of monitoring patient's health from doctor's head, this method presents the methodology for monitoring patients remotely using GSM network and Very Large Scale Integration (VLSI) technology. monitoring systems measure physiological characteristics either continuously or at regular intervals of time. The device alarms when the heart beat & the body temperature exceed the provided threshold value. This threshold value is defined by the programmer at the time of programming the microcontroller. The threshold value given for the project is as 20 to 120 pulses per minute for heart beat indication& 18°C to 38°C for temperature. Using this technology an alarm is generated whenever the patient is at risk but it could not provide the detail information about the patient health status. And it is not possible to view all the recorded data at the same platform

2. PROPOSED METHOD

Internet of Things (IoT) is the emerging paradigm, which contains huge amount of smart object and smart devices connected to the internet for communicating with each other. IoT devices are used in many fields which make the



International Research Journal of Engineering and Technology (IRJET) e-ISSN: 2395

Volume: 07 Issue: 03 | Mar 2020

www.irjet.net

users' day to day life more comfortable. These smart devices are used to collect temperature, blood pressure, sugar level etc., which are used to evaluate the health condition of the patient. Communicating the collected information to the doctor, making accurate decision on the data collected and notifying the patient is the challenging task in the IoT. In this project, the architecture of the Remote Health Monitoring System (PHMS) using IoT devices is proposed to collect the required parameters and evaluate the data obtained from the IoT devices. RHMS also notifies the patient with possible precautionary measures to be practiced by them. This system suggests the patient with medical care and next step to be followed in case of critical situation. The PHMS system is evaluated for certain parameters and the decisions made on the data obtained from the source are assumed to evaluate the system. The simulated results experiments the correctness and effectiveness of the proposed system. In this project, an IoT based Remote Health Monitoring System (RHMS) using arduino device is proposed to collect the required parameters like temperature, heart beat and blood pressure and evaluate the data obtained from the IoT devices. Over the last few years, the usage of arduino increases exponentially due to its reliability, easiness, open source programming, and low cost. In this paper, we introduce new way of implementing RHMS with Arduino Uno named as an IoT based Patient Health Monitoring System using Arduino. Data generated by the sensors are microcontroller processed bv arduino ATMEGA 328P.ESP8266 provides unsurpassed ability to embed WiFi capabilities within other systems. It offers a complete and self-contained Wi-Finetworking solution; it can be used to host the application or to offload Wi-Fi networking functions from another application

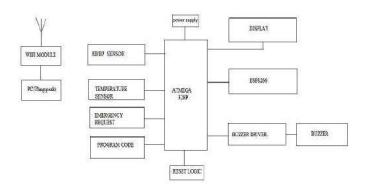


Fig -1: Health Monitoring System using arduino

3. IMPLEMENTATION DETAILS

A. ARDUINO IDE

An integrated development environment (IDE) (also known as integrated design environment or integrated debugging environment) is a software application that provides comprehensive facilities to computer programmers for software development. An IDE normally consists of:

• A source code editor

- A compiler/or an interpreter
- Build automation tools

A debugger sometimes a version control system and various tools are integrated to simplify the construction of a GUI. Many modern IDEs also have a class browser, an object inspector, and a class hierarchy diagram, for use with object-oriented software development. IDEs are designed to maximize programmer productivity by providing tightlyknit components with similar user interfaces. This should mean that the programmer has to do less mode switching versus using discrete development programs. However, because an IDE is a complicated piece of software by its very nature, this higher productivity only occurs after a lengthy learning process. Typically an IDE is dedicated to a specific programming language, allowing a feature set that most closely matches the programming paradigms of the language. However, there are some multiple-language IDEs, such as Eclipse, Active State Komodo, recent versions of NetBeans, Microsoft Visual Studio, WinDev, and Xcode. IDEs typically present a single program in which all development is done. This program typically provides many features for authoring, modifying, compiling, deploying and debugging software. The aim is to abstract the configuration necessary to piece together command line utilities in a cohesive unit, which theoretically reduces the time to learn a language, and increases developer productivity. It is also thought that the tight integration of development tasks can further increase productivity. For example, code can be compiled while being written, providing instant feedback on syntax errors. While most modern IDEs are graphical, IDEs in use before the advent of windowing systems (such as Microsoft Windows or X11) were text-based, using function keys or hot keys to perform various tasks (Turbo Pascal is a common example). This contrasts with software development using unrelated tools, such as vi, GCC or make. The Arduino Integrated Development Environment - or Arduino Software (IDE) - contains a text editor for writing code, a message area, a text console, a toolbar with buttons for common functions and a series of menus. It connects to the Arduino and Genuino hardware to upload programs and communicate with them.

B. Getting Started with arduino

Step1: Get an Arduino board and USB cable



Fig 2: Arduino Board and Arduino Cable.

Step 2: Download the Arduino environment- get the latest version from the download page.



Step 3: Connect the board- Connect the Arduino board to your computer using the USB cable. The green power LED (labeled PWR) should go on.

Step 4: Install the drivers.Step5: Launch the arduino application- Open the blink example



Fig.3. Sample code for LED blink

Step6: Select your board

	Auto Format 3 Archive Sketch Fix Encoding & Reload Senal Monitor 373	M ED
	Serial Port Serial Port Burn Bootloader	 Arduino Ilieo Arduino Duemilanove or Nano w/ ATmega328 Arduino Diacimila, Duemilanove, or Nano w/ ATmega168 Arduino Mega 2560 Arduino Mini Arduino Mini Arduino Mini Arduino BT w/ ATmega328 Uh/Pad Arduino w/ ATmega168 Uh/Pad Arduino w/ ATmega168 Arduino Pro ar Pro Mini (3V, 16 MHz) w/ ATmega328 Arduino Pro ar Pro Mini (3V, 16 MHz) w/ ATmega328 Arduino Pro ar Pro Mini (3V, 16 MHz) w/ ATmega328 Arduino Pro ar Pro Mini (3V, 16 MHz) w/ ATmega328 Arduino Pro ar Pro Mini (3V, 16 MHz) w/ ATmega328 Arduino Pro ar Pro Mini (3V, 16 MHz) w/ ATmega328 Arduino Pro ar Pro Mini (3V, 30 MHz) w/ ATmega328 Arduino Pro ar Pro Mini (3V, 30 MHz) w/ ATmega168 Arduino No or older w/ ATmega168
		100

Step7: Select your serial port- Select the serial device of the Arduino board from the Tools | Serial Port menu. This is likely to beCOM3 or higher (COM1 and COM2 are usually reserved for hardware serial ports).

Step8: Upload the program.

4. RESULTS AND ANAYSIS



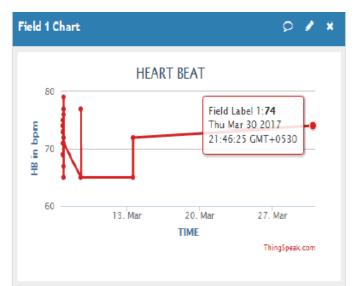




Fig.4. Field 2 chart (Temperature)

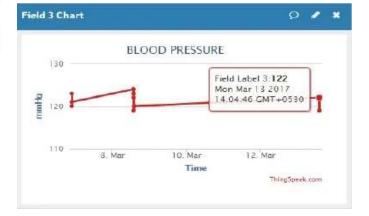



5. CONCLUSIONS

This research led to the development of a system which measured heartbeat and temperature of a patient and sent it to a remote end by the use of Arduino and Atmega328



RJET Volume: 07 Issue: 03 | Mar 2020

microcontroller at a reasonable cost with great effect. It utilized remote monitoring system technology which enabled the monitoring of patients outside of clinical settings and leads to increasing access to health care as well as decreasing the health care delivery costs. Nowadays, most of the systems work in offline mode. The research utilized two sensors for measuring heartbeat and temperature of a body. These sensor are controlled Atmega328microcontroller. For measurement of heartbeat, we used fingertip to measure it accurately. The device uses the optical technology to detect the flow of blood through the finger. The heart beat monitor in our research counts the heart beat rate in beats per minute (bpm) for specific interval and transfers the calculated rate via Wi-Fi module and sends it to a remote end where it displays the observed data in the website called Thingspeak.com. Optical sensor with combination of infrared light emitting diode (IR LED) and IR photodiode senses the pulse rate that produces weak output of analog signal. The signal is then amplified and filtered and fed to the microcontroller input. The microcontroller processes the input and calculates heart beat rate in beats per minute. Thus, calculated heart beat rate is displayed in liquid crystal display (LCD). The data is also displayed on the screen of a mobile device or PC by using Wi-Fi module.LM35 is used as a temperature sensor in this project which measures the temperature of the body and the measured data is fed to the transmitter module. Wireless system is used to transmit the measured data to a remote location. The transmitter transmits the calculated beat rate and is received in another terminal called receiver module. Inconvenience of using wire is avoided in this research. Finally, the data are displayed in the mobile screen or PC at the receiving end where the specialist or physician can analyze the data and will be able to provide aid. The developed system is reliable, economical and user friendly. The current version of the system can post three parameters (Heartbeat, Temperature, Blood pressure) on to the web. But still there is room for improvements. Few other parameters like glucose levels, BMI (Body Mass Index), waist circumference etc., can also be measured. Then the complete health status of patient will be recorded and readily available on the web. Such that it will easier to the doctor to monitor the progress of patients' health now and then to advise them about their health. The system can be extended by adding more features like linking the ambulance services, leading doctor's list and their specialties, hospitals and their special facilities etc., Doctors can create awareness about diseases and their symptoms through the mobile application. From the evaluation and the result obtained from analysis the system is better for patients and the doctor to improve their patients' medical evaluation.

REFERENCES

[1] OMS, Overview – Preventing chronic diseases: a vital investment,http://www.who.int/chp/chronic_disease_repor t/part1/en/, visited, April 2017.

[2] Charalampos Doukas, "Building Internet of things with arduino", Apr 02 2012. Available online:

http://www.buildinginternetofthings.com/wpcontent/uploa ds/INTRODUCTION.pdf, visited April 2017.]

[3] American Heart Association, overview – High Blood Pressure,

http://www.heart.org/HEARTORG/Conditions/HighBloodPr essure/KnowYourNumbers/Understanding-Blood-Pressure-Readings_UCM_301764_Article.jsp#.WQA20mxf3IU, visited, April 2017.

[4] MatinaKiourexidou, Konstantinos Natsis, Panagiotis Bamidis, NikosAntonopoulos, EfthymiaPapathanasiou, Markos Sgantzos, Andreas Veglis "Augmented Reality for the Study of Human Heart Anatomy" International Journal of Electronics Communication and Computer Engineering 2016.

[5] Sankar Kumar S, Gayathri N, Nivedhitha D, Priyanka A S "A Cost effective Arduino Module for Bedridden patient's Respiratory Monitor and Control" International Journal of advanced research trends in engineering and technology (IJARTET) VOL. II, SPECIAL ISSUE XXI, MARCH 2016.

[6] Bhagya Lakshmi, M1 Hariharan ,R2 Udaya Sri, C3 Nandhini Devi, P4 Sowmiya"Heart Beat Detector using Infrared Pulse Sensor" IJSRD - International Journal for Scientific Research & Development Vol. 3, Issue 09, 2015.

[7]Purnima, Puneet singh, "Zigbee and GSM based Patient Helath Monitoring System", IEEE International Conference on Electronics and Communication System, September 2014.