

STUDY OF A FLAT SLAB BUILDING WITH A SHEAR WALL AT PERIPHERY AND FLAT SLAB WITH DROPS

AKSHANSH SINGH, VINAYAK MISHRA*

(M.Tech. Structural Eng.), Civil Engineering Department, Institute of Engineering and Technology, Lucknow
Assistant Professor, Civil Engineering Department, Institute of Engineering and Technology, Lucknow

ABSTRACT

Flat slab construction practice faces great risk during severe earthquake shaking. In the study two different types of flat slab buildings are taken into account; flat slab with drops and flat slab with shear wall at periphery. This lateral force resisting mechanism strengthens structural stiffness of these flat slab structures. It is observed that the lateral force resisting capacity of flat slab structure increases significantly with the use of shear wall.

KEYWORDS: shear wall, flat slab with shear wall at periphery, flat slab with drop, pushover, ETABS software, seismic response.

INTRODUCTION

Seismic activity is one of nature's most damaging phenomena, and their occurrence is often unforeseeable. The Traditional RC Frame structures are extensively utilized for construction in today's world. Flat slab construction has significant benefits over traditional RC Frame construction in terms of architectural freedom, space use, ease of form work, and construction speed. Earthquake are mostly caused by tectonic and volcano activity so, it is our responsibility to fulfill the provision of earthquake resistant design IS1893 and IS13920 should be completely adhered. Here in this paper two different types of flat slab buildings are taken into account. The behavior of flat slab building with 2 models was analyzed, and a non linear static pushover analysis technique is used in the study.

LITERATURE REVIEW

Klemencic et al. conducted a several tests on post-tensioned wall connections with slab, and the findings revealed that the joints fail at internal storey drift 5%.

Weidlinger and Ettouney studied the tectonic lateral disturbance of high rise building of flat slab in the New York City.

Vinod Goud (2015):- The structural behaviour of shear wall – flat slab interaction is studied; among the important objectives some are resistance to various forces of action as well as the advantage of shear walls on the performance of these buildings structures under seismic forces.

Robertson et al research concluded brittle punching failure caused by shear stresses and asymmetrical forces transferred between slabs and columns Inconsistent moments also cause large shear stresses in the slab when subjected to a flat slab with a drop and a shear wall at different locations during earthquake has been investigated intensively.

PUSHOVER ANALYSIS

Pushover analysis is used to identify the nonlinear behaviour of structures under dynamic loading, such as max storey displacement, storey shear, overturning moment, storey drift, and max storey drift. That's a sort of non-linear static and dynamic analysis in which the structure's strength is evaluated beyond its limit of proportionality.

Due to their effective span/depth ratios and the savings generated by constraining storey heights, concrete flat slab systems are a common kind of reinforced concrete structures, primarily in medium-sized industries. These slabs are prone towards gradual failure than slab-beam-column complexes because the pressure formerly absorbed by the removed columns cannot be shifted in the absence of beams. It is consequently critical to evaluate the resistance to progressive collapse of RC flat slab constructions. As a result, it was advised that in seismically prone areas, flat-slab construction should only be implemented as the vertical structural members system in structures braced by framework or shear walls responsible for the structure's transverse capacity. To withstand gravity loads, slab-column interfaces

must absorb the lateral elastic deformation of the primary lateral load-resisting structural parts resulting punching failure.

OBJECTIVE

To compare the results of displacement, base shear and storey drift parameters as specified in IS- 1893:2016 for various flat slab also to maximize the performance of various flat slab building models in relation to various types of force resisting systems further to investigate the nonlinear behaviour of flat slab buildings subjected to seismic stresses.

STRUCTURAL CONFIGURATION AND DESIGN


SNo.	Parameters	Dimension
1	Building Type	Commercial Building
2	Type Of Frame	Flat Slab System
3	Plan Dimension	25x15 (X*Y)
4	No. Of Stories	G+9
5	Bottom Storey Height	3m
6	Floor To Floor Height	3m
7	Total Height Of Building	48m
8	Slab Thickness For Flat Slab	150mm
9	Thickness Of The Drop	200mm
10	Width of drop	2m
11	Shear wall Thickness	200mm
12	Column size	400x400mm
13	Grade of concrete (slab)	M20
14	Grade of concrete(column)	M25
15	Rebar	Fe-415

MATERIAL PROPERTIES (I.S.456:2000)

SNo.	Material	Grade (N/mm ²)
1	Grade of concrete(column)	M-25
2	Grade of concrete (slab)	M-20
3	Rebar	Fe-415

SEISMIC PROPERTIES (I.S.1893:2016)

1	Zone	V
2	Damping ratio	5%
3	Importance factor (I)	1
4	Type of soil	Type II (medium soil)
5	Response reduction factor R	5

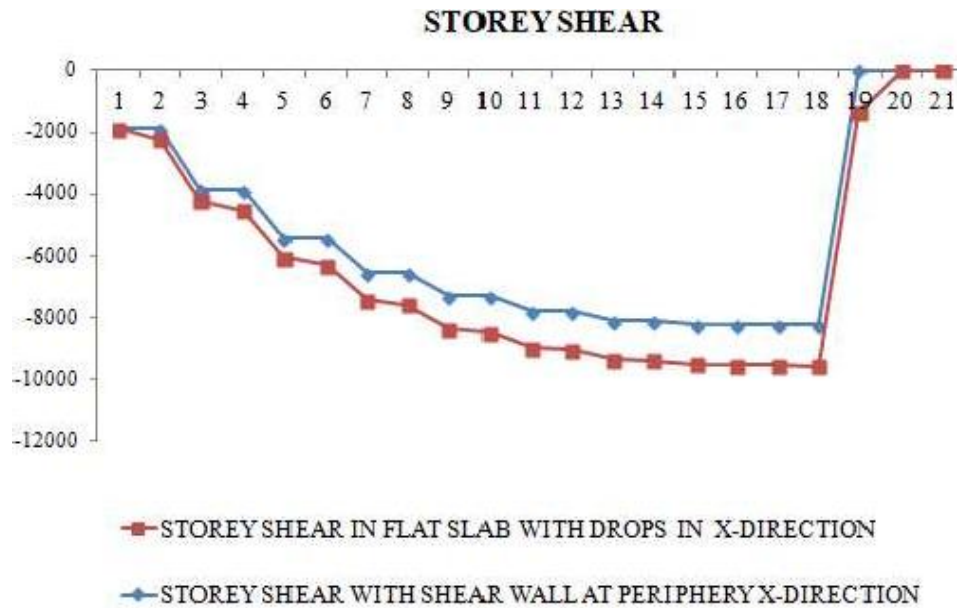

The storey shear in x direction with shear wall at periphery has more resistance to storey shear than flat slab with drop. Thus; the building is much stable under lateral seismic loading with periphery respect to flat slab with drop.

CONCLUSION

The lateral force acting per storey is significantly higher in case of shear wall at periphery but the lateral force decreases from top storey to base in case of flat slab with drops.

Shear wall at periphery offers better resistance to lateral forces and serviceability and stability of the structure resulting in increasing the stiffness of building and providing seismic stability under lateral forces.

Flat slab building with drops offers greater flexibility than building with shear wall at periphery. In order to decrease deformation demands during major earthquakes, stronger structural systems such as shear walls with steel bracing and shear wall at core can be used as replacement.

The value of displacement obtained under action of lateral forces for shear wall at periphery is better when compared to flat slab with drops.

REFERENCES

1. Ahmad J. Durrani, S.T.Mau and Yi-Li,(1994). "Earthquake Response of Flat Slab Buildings, Journal of Structural Engineering", Vol. 120.
2. Chopra, A.K. "Dynamics of Structures: Theory and applications to earthquake engineering", 3rd Ed., Prentice-Hall, New Delhi, (1998).
3. H.-S. Kim, D.—G. Lee,(2004) "Efficient analysis of flat slab structures.
4. IS 456:2000, "Plain and Reinforced concrete – Code of practice", Bureau of Indian Standards, New Delhi
5. Kavita Golghate, Vijay Baradiya and Amit Sharma, "Pushover Analysis of 4 Storey's Reinforced Concrete Building", International Journal of Latest Trends in Engineering and Technology.
6. Kokot S, Anthoine A, Negro P, Solomos G. Static and dynamic analysis of a reinforced concrete flat slab frame building for progressive collapse. Eng Struct 2012;40:205–17. <https://doi.org/10.1016/j.engstruct.2012.02.026>.

7. Liu M. Progressive collapse design of seismic steel frames using structural optimization. *J Constr SteelRes*2011; 67(3):322–32. <https://doi.org/10.1016/j.jcsr.2010.10.009>.
8. UFC 4-023-03. Design of buildings to resist progressive collapse. Unified Facilities Criteria, Department of Defense, USA; 2009.
9. Klemencic R, Fry JA, Hurtado G, Moehle JP. Performance of post-tensioned slab-X-Bracing wall connection. *PTI Journal* 2006;4(2):7–23
10. Vamvatsikos D, Cornell CA. Incremental dynamic analysis. *Earthq Eng Struct Dyn* 2002;31:491– 51
11. Seismosoft. SeismoStruct – A computer program for static and dynamic nonlinear analysis of framed structures; 2018 - available from <http://www.seismosoft.com>.
12. X.I.E. Junju , W.E.N. Zenping , 2008 , A measure of drift demand for earthquake ground motions based on Timoshenko beam model. In 14th World Conference on Earthquake Engineering
13. Tuken, N. Siddiqui, Assessment of shear wall quantity in seismic-resistant design of reinforced concrete buildings, *Arab. J. Sci. Eng. (AJSE)* Springe 38 (10) (2013) 2639–2648. Tuken, N. Siddiqui, SBC-based assessment of shear wall quantity in moment resisting frame buildings, *KSCE J. Civ. Eng. Springe* 19 (1) (2015) 188–199.