

An Image Search Reranking Model based on attribute assisted hypergraph

Miss. Madhuri J.Mhaske¹, Prof. Sachin P.Patil²

¹ PG Scholar Computer Engineering , G. H. Raisoni College of Engineering and Management, Savitribai Phule Pune University , Chas, Ahmednagar.414001,Maharashtra, India.

² Assistant professor, computer engineering, G.H. Raisoni College of engineering and Management, Savitribai Phule Pune University, Wagholi, Pune 411015, Maharashtra, India.

Abstract - An image search reranking is definitely a superior approach over the text based image search. This approach include visual features for reranking. The semantic approach is proposed in this paper. Attributes of images are classified into the groups. Based on those attributes from classifiers, each image is represented. The ranking score is used to evaluate the relevance of he image with the query image. Hypergraph models these images based on the ranking scores. Content based image retrieval (CBIR) technique is used in combination with Hypergraph. CBIR focuses on the content of the images such as color, texture, shape or any other information related with the images.

Key Words: Reranking, Visual Features, Semantic Approach, Attribute, Hypergraph, CBIR.

1. INTRODUCTION

Queries are used as keywords by the Internet image search engines. Users usually type keywords as queries in the hope of finding the images. The search engine returns Hundreds of images ranked by the keywords extracted from similar text.Usually text-based image search is inefficient because of the ambiguity of query keywords. The keywords provided by user are generally very short. They fail in describing the image content accurately. The search results are not efficient and include images having different semantic meanings.

Because of the success of text based image search, many systems rely entirely on the text based image search for images, audio/video etc. However, the visual systems should not rely entirely on the description of the images for relevance. Instead they should consider the visual content of the images as the text based results may contain ambiguity. They may not describe the content properly. For example, if

user wants to search for a red image, the images cannot be evaluated by text based search.

Many approaches are under investigation to increase the performance of web image search. One of them is image annotation, which aims to associate several keywords of an image to describe its content based on machine learning and vision techniques. However, although the great progress has been made in the past few years, automatic annotation of large scale web images hardly achieve satisfactory performance due to the semantic gap. The Second approach is web image search reranking. Being different from annotation which aims to enhance the text indexing of web images, reranking approach is applied to adjust search results directly by mining images' visual content. Visual search reranking is defined as reordering visual documents such as images or video clips based on the initial search results or the auxiliary knowledge to improve the search.

The main motto of visual reranking is to refine the image results based on visual content rather than text based search. We propose the model that combines the visual content with the attributes which best describe the images. Content based image retrieval technique is adopted to monitor the image content. Hypergraph is used to reorder the images based on relevance scores obtained from different image ranking techniques.

1.1 Design Goals

- **Search-ability:** User should be able to generate any trapdoor for searching over any shared file. Compactness must not affect the capability of searching
- **Optimized Consistency:** To optimize the consistency of ranking scores over visually similar images and minimize the inconsistency between the optimal list and the initial list.
- **Efficient Reranking:** To make online image reranking efficient.

- **Reduction in Operation Factors:** Reduce Operation Time.
- **Accuracy and Reliability :** Increase accuracy and reliability

1.2. Related Work

To consider the visual information is very important to overcome the drawbacks of text based image search. The conventional methods only model the pair wise relationship among the images. The hypergraph technique was invented to solve these problems[2].It is used to establish the relationship among different images as the hyperedge joins multiple image samples. However, the existing Hypergraph learning approach have some drawbacks as generation of hyperedges and handling of the hyper edges[2].

The user query is classified into multiple weight classes defined on the basis of user's search intention. In each class, weight mechanism is provided to associate the visual features along with the images. By the clustering method and the visual information of the user's query, the query is evaluated to draw the user's intent. This evaluation leads the query into different positive samples which makes the similar query to be expanded to improve the CBIR[13].

Each attribute has an explicit semantic meaning, e.g., "animals". Attribute concepts are relatively more general and easier to model, e.g., attributes "animal" and "car" are easier to model and distinguish than the concrete semantic concepts "Husky" and "Gray Wolves".[12]Thus, attributes are expected to minimize the semantic gap between low-level visual features and high-level semantic meanings. Su. [3] proposed to alleviate the semantic gap between visual words and high level concept, focusing on polysemy phenomenon of particular visual words.

By randomly splitting the training data, Farhadi [4] exhaustively train thousands of classifiers and then chose some of the discriminative ones as attributes(e.g., attributes that "dog" and "cat" have but "sheep" and "horse" do not). Kumar [6] define a set of binary attributes called similes for face verifications. Each attribute detector in smiles are exclusively trained for one specific category, e.g., "the mouth of Angelina Jolie".

Recently, Parikh and Grauman [7] propose a new strategy to compare the strength of attributes, e.g., "while A and B both are shiny, then A is shinier than B".Zhan [3] proposed an attribute augmented semantic hierarchy for content-based image retrieval. Such superiority motivates us to exploit attributes for visual reranking.

Baluja and Jing proposed a Visual Rank framework to efficiently model similarity of Google image search results

with the graph [9].The framework reorders the images based on the visual information. The graph is constructed based on the relevance scores and the final result is evaluated.

2. PROBLEM STATEMENT

2.1 Existing System

The existing system improves the text based search result by introducing the graph based methods. The graph based methods have emerged as an effective approach for image reranking. In Graph based methods, the relationship among different samples are represented by the way of nodes and edges.

The first step is to draw out the results by text based search. In the next step, the graph is constructed. In the graph, the image samples are represented by vertices and the relationship among them is described by edges. The learning task is also performed on these graphs. Suppose the samples are represented by the feature vectors in a feature space, an undirected graph may be constructed by using the pair wise distances and graph-based semi-supervised learning approaches can be performed on this graph to categorize the objects.

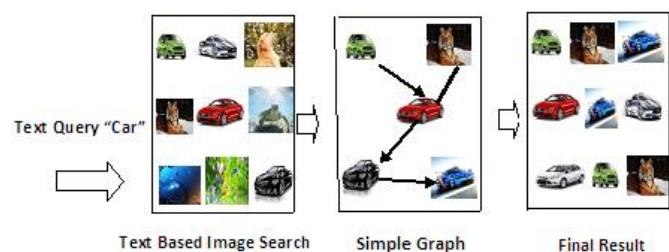


Fig -1: Block Diagram for Existing System.

The drawback of this method is that the simple graph cannot describe the high level content. Also the graph links only two vertices by the edge at a given time. These drawbacks are overcome in the proposed system. Hypergraph allows the hyperedge to connect more than two vertices at a given point of time.

As the high order information is not taken into consideration, the final results drawn from this system may contain duplicate, ambiguous data.

2.2 Proposed System

We propose the attribute assisted reranking model based on hypergraph approach and content based image retrieval. First step is to train multiple classifiers for the previously

defined attributes. Based on those attributes from classifiers, each image is represented.

The Hypergraph is used to order these images considering the ranking scores. The relationship among these images is best described by Hypergraph by considering low level visual features and the attribute features. The regularizer is added on the weights of hyperedge which selects semantic attribute for improvement of the hypergraph approach presented in [11]. As a result, the noisy attributes are removed and the opportune samples are selected which makes the system more robust and efficient.

Content based image retrieval (CBIR) technique is also used in combination with Hypergraph. Apart from the traditional keyword search systems, CBIR considers the global features as color, edge, LBP etc as well as the local features drawn out from the image samples. CBIR focuses on the content of the images such as colour, texture, shape or any other information related with the image.

Colour - For every pixel, the colour descriptors are described as RGB values.

Scale- The scale invariant feature transform (SIFT) descriptors are described for the 8x8 blocks of every pixel of having size as 4.

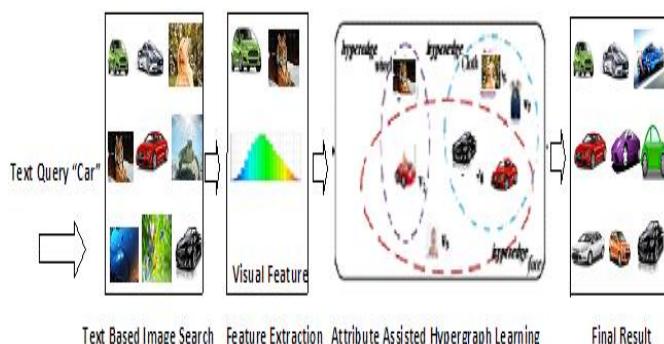


Fig -2: Architectural Diagram of Proposed System.

Suppose User submits the textual query as "Car". The first step is to obtain the result based on textual search. The text based search engine outputs the images having "car" in its description. This result may contain duplicate or inconsistent media. Then the content based image retrieval technique is applied to the result. Then the clusters are formed by cluster conditional probability. The images in the clusters are reordered by the cluster membership value. The relevant images are then modelled in the Hypergraph to fetch more refined result. The final result is the consistent result containing no duplicate media.

3. ALGORITHM

Attribute-assisted Hypergraph Learning

This algorithm summarizes the implementation of the alternating optimization.

Step 1: Initialization.

1.1 Set W as a diagonal matrix with initial values.

1.2 Construct the hypergraph Laplacian Δ and compute the matrices D_v , D_e and H accordingly.

Step 2: Label Update.

Compute the optimal f , which is: $f = (1 - \alpha)(I - \alpha\Theta)^{-1}y$

Step 3: Weight Update.

Update the weights w_i with the iterative gradient descent method introduced.

Step 4: Update Matrix.

After obtaining W , update the matrix Θ accordingly.

Step 5: Quit.

Put $t=t+1$. If $T < t$, quit from the iteration and output the results, else go to step 2.

4. MATHEMATICAL MODEL

A. Set Theory

Input Set: Request from user to search an image from existing images uploaded by owner.

I=Request Set

Image Set: Consider a set of images that are uploaded by owner.

A=Attribute Set:

Consider a set of attributes for an image in the image dataset.

R=Relevant Set:

Set consists of the images relevant to the query thrown by User.

IR=Irrelevant Set:

Set consists of the images irrelevant to the query thrown by User.

V=Set of vertices(Images) in Hypergraph.

E=Set of Edges(Relationship among images) in Hypergraph.

Output:

O= Output Set

Final Set of Images most relevant to the user's query.

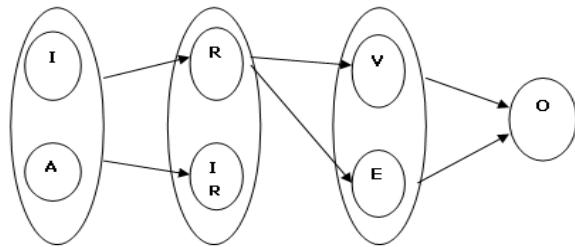


Fig -3: Venn Diagram.

5. EXPECTED RESULT

We proposed an image search reranking framework to improve the text based image retrieval results based on the information obtained from the top ranked images.

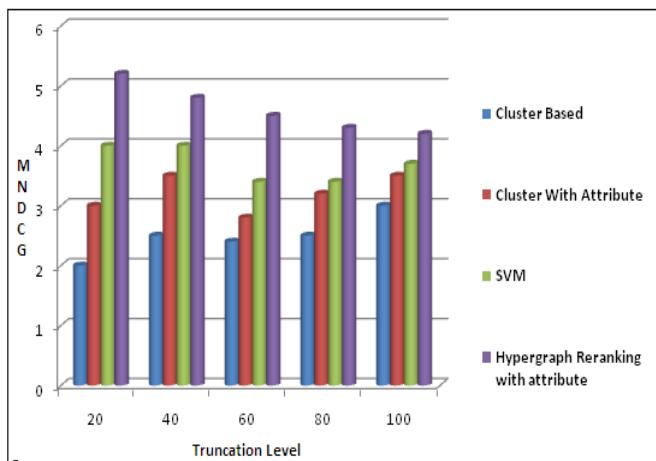


Chart -1: Performance Evaluation of our method with conventional methods.

The performance of our method is the best compared to the traditional methods. They are described as follows.

- **Cluster based Image search:**

In this method, the images are first grouped into multiple clusters. Then the clusters are rearranged based on the probability value. Thereafter the images in the clusters are rearranged based on the membership value. This method works well when there are many duplicate results from the query. But the method is inefficient when work with the diverse image result set.

- **Cluster based search with attribute:**

The similar strategy is used here which was used with the traditional cluster based method except the image ordering is done based on the attributes of the images. This method gives better result as compared to previous one.

- **PRF-SVM Method:**

In this method, the Pseudo Relevance Feedback(PR) is used to classify the images into positive training samples and the negative training samples are taken from other images. Then a Binary classification method called SVM(Support Vector Machine) is used to rerank those results. The results from this method are noisy and do not generate the effective result set.

- **Hypergraph Reranking with attribute:**

Our proposed method performs better than the conventional methods.

6. CONCLUSIONS

The text based image search technique, though simple and easy to implement, is not so effective in many aspects. We propose an image search reranking model based on attribute assisted Hypergraph. The Hypergraph models the relationship among multiple images relevant to the user query. As well the content based image retrieval technique is also used for effective reranking. In CBIR, base of image search is the Content of the image. Content may be considered as Colour, Texture, shape or any other information related to the image. CBIR gives the improved result. The image searching is done in multiple layers. So the final result obtained from Attribute assisted reranking model is more efficient as compared with previous techniques.

ACKNOWLEDGEMENT

I take this opportunity to express my gratitude towards my guide Prof. Sachin Patil for his personnel involvement and technical guidance and model direction, important input and consistent consolation all through the spam venture. Working under him was greatly learned experience for me. For all his help and interest in project come out with best.

REFERENCES

- [1] Junjie Cai, Zheng-Jun Zha, Meng Wang, Shiliang Zhang, and Qi Tian, "Attribute Assisted Reranking Model Based on Web Image Search", *In Proceedings of the IEEE Transactions of Image Processing VOL. X, NO. XX*, 2015,
- [2] Jun. Y, D. Tao and M. Wang., " Adaptive Hypergraph learning and its application in image classification.", *IEEE Transactions on Image Processing*, vol. 21, no. 7, pp. 3262-3272, 2012.
- [3] H. Zhang, Z. Zha, Y. Yang, T.-S. Chua, " Attribute-augmented semantic hierarchy." *In Proceedings of the ACM Conference on Multimedia*, 2013.
- [4] N. Morioka and J. Wang, "Robust visual reranking via sparsity and ranking constraints.", *Proceedings of ACM Conference on Multimedia*, 2011.
- [5] F. Yu, R. Ji, M-H Tsai, G. Y and S-F. Chang., " Weak attributes for large-scale image retrieval." *In Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2012.

[6] W. H. Hsu, L. S. Kennedy and S.-F. Chang., "Video search reranking via information bottle principle.", In *Proceedings of ACM Conference on Multimedia*, 2006.

[7] R. Yan, A. G. Hauptmann and R. Jin., "Multimedia search with pseudorelevance feedback." In *Proceedings of ACM International Conference on Image and Video Retrieval*, 2003

[8] X. Tian, L. Yang, J. Wang, Y. Yang, X. Wu and X.-S. Hua., "Bayesian video search reranking." *Transaction on Multimedia*, vol. 14, no. 7, pp.131-140, 2012.

[9] F. Jing and S. Baluja., "Visualrank: Applying pagerank to large-scale image search." *IEEE Transaction on Pattern Analysis and Machine Intelligence*, vol.30, no.7, pp.1877-1890, 2008.

[10] B. Siddiquie, R.S.Feris and L. Davis., "Image ranking and retrieval based on multi-attribute queries." In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2011.

[11] J. Cai, Z.-J. Zha, W.-G. Zhou, Q. Tian., "Attribute-assisted reranking for web image retrieval." In *Proceedings of the ACM International Conference on Multimedia*, 2012.

[12] N. Kumar, A. C. Berg, P. N. Belhumeur and S. K. Nayar., "Attribute and simile classifiers for face verification." In *Proceedings of the IEEE International Conference on Computer Vision*, 2009.

[13] X. Tang, K. Liu, J. Cui, F. Wen and X. Wang., "IntentSearch: Capturing User Intention for One-Click Internet Image Search.", *IEEE Transaction on Pattern Analysis and Machine Intelligence*, vol.34, no.7, pp.1342-1353, 2012.

Prof .Sachin Pravin Patil



Assistant professor, G. H. Raisoni College of Engineering and Management, Vagholi, Pune

Area: Image Processing

Email:sachin.3400@gmail.com

BIOGRAPHIES

Miss. Madhuri Jayant Mhaske



PG Scholar Computer Engineering, G. H. Raisoni College of Engineering and Management, Savitribai Phule Pune University, Chas, Ahmednagar.414001, India.

Email:mhaskemadhuri.it@gmail.com